
Branch socket

P 71 GVD 2xM25

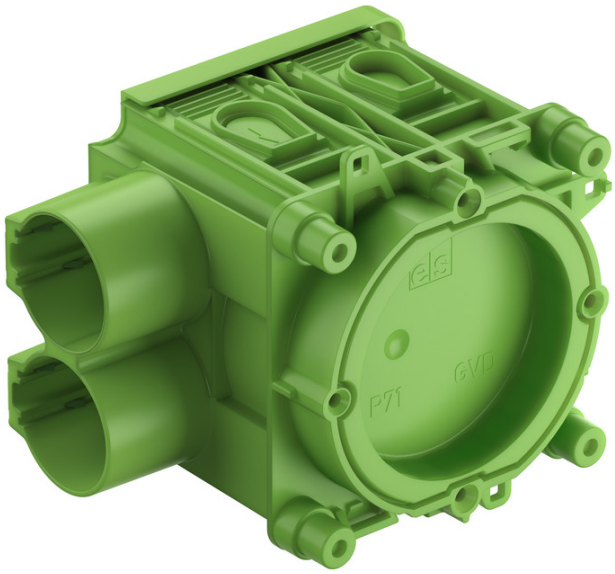

P 71 GVD 2xM25

Branch socket

Productnumber: 98406601
Dimensions: 71 x 71 x 67,5 mm

Equipment junction box for horizontal factory finishing, 1-part, diameter 60 mm, with enlarged terminal compartment, 4 screw bosses with 60 mm screw spacing, combinable, with claw fasteners, combinable in normal 71 mm spacing, also suitable for opposing formwork, VDE certified in accordance to DIN EN 60670 (VDE 0606)

for 50mm HM-UNI magnetic clamp (97929901), magnet installation, conduit adapter and additional conduit adapter with Easy-Cut-Membran, sealing range M16 - M25, support spar compatible



Technical Data

electrical characteristics

Rated insulation voltage AC:	400 V
Protection class:	II
Type of protection:	IP30
Suitable for:	Concrete construction
UL Type Rating:	not specified

Colours

Base unit colour:	green
Cover colour:	green

Dimensions

Width:	71 mm
Length:	71 mm
Height:	67.5 mm
Diameter:	60 mm
Weight:	0.0554 kg

Material characteristics

Halogen free:	yes
Flammability class according with UL94:	HB
Glow-wire flammability:	650 °C (EN 60695-2-11)

mechanical properties

Type of fastening:	magnet installation

Sales Information

EAN:	4013902634095
ETIM Class:	EC002601
Custom tariff number:	39269097
Minimum order quantity:	1

Material

Base unit material:	Polypropylene
Cover material:	Polypropylene

Certificates

Test mark:	VDE (DIN EN 60670-1/-22 (VDE 0606-1/-22))

Accessories

97929901 - HM-UNI - IBT Accessories

98401601 - RA 16 - Conduit adapter

98402001 - RA 20 - Conduit adapter

98402501 - RA 25 - Conduit adapter

Cable gland

Integrierte Rohreinführung:
2 x M25

EasyCut-Membrane:
4 x bis M25