
Prism terminal

KPK NH 2

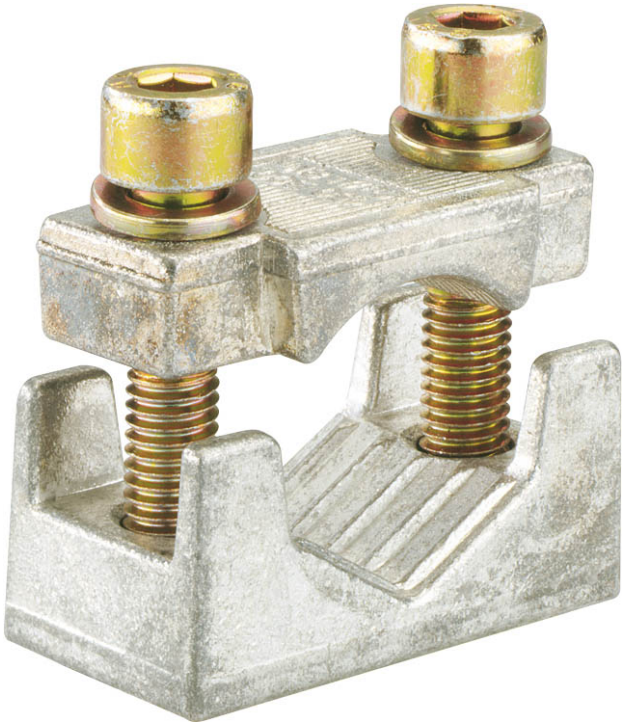

KPK NH 2

Prism terminal

Productnumber: 07673201
Dimensions: 27 x 20,2 x 21 mm

Prism terminal for the connection of aluminium and copper conductors to NH-switchgear in GTi enclosures (GTS, GTT, GSS, GST)

For AL/CU conductor 1x (120-240), Alu conductor see technical annex, set = 3 pieces

Created at 04.06.2026. All statements without guarantee. We reserve the right to make improvements to technical progress.
Günther Spelsberg GmbH + Co. KG
Im Gewerbepark 1 · D-58579 Schalksmühle · Telefon: +49 (0) 23 55 / 892-0 · Telefax: +49 (0) 23 55 / 892-299

Technical Data

electrical characteristics

Rated connecting capacity:	240 mm²
Rated current:	400 A
Number of poles:	1
shockproof:	No
Connection 1: Connection type:	Screws
Connection 1: Strip length:	24 mm
Connection 1: Clamping points per pole:	1
Connection 1: Suitable for Cu conductors:	1
Connection 1: Suitable for Al conductors:	1
Connection 1: Connectable conductor cross-section, single-wire (min):	120 mm²
Connection 1: Connectable conductor cross-section, single-wire (max):	185 mm²
Connection 1: Connectable conductor cross-section, stranded (min):	120 mm²
Connection 1:Connectable conductor cross-section, stranded (max):	240 mm²

Dimensions

Width:	27 mm
Length:	20.2 mm
Height:	21 mm
Weight:	0.0768 kg

mechanical properties

Connection 1: Tightening moment:	11 Nm

Sales Information

EAN:	4013902566877
ETIM Class:	EC002498
Custom tariff number:	85369010
Minimum order quantity:	1