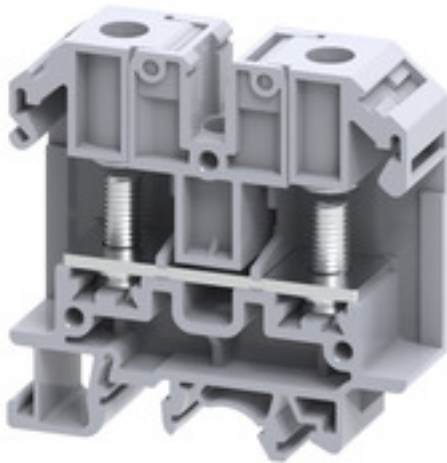


SRL 6**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image**

Our SRL terminals are best suited for applications where connections are subjected to strong vibrations. The wire to be connected is first crimped onto a ring or fork eyelet and then attached to the busbar of the terminal block. The fixing nuts remain captive in the hinged plastic carrier. For connection, the plastic carrier is lifted, the conductor is inserted with the eyelet, and the plastic carrier returned to its initial position. The fixing nut is tightened with a simple screwdriver to create a secure connection between terminal block and eyelet.

General ordering data

Version	Stud terminal, Threaded stud connection, grey, 35 mm², 125 A, 1000 V, Number of connections: 2, Number of levels: 1, TS 35, TS 32, V-0, Polyamide
Order No.	2614960000
Type	SRL 6
GTIN (EAN)	4050118654011
Qty.	50 pc(s).

SRL 6

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	63.1 mm	Depth (inches)	2.484 inch
Height	63.9 mm	Height (inches)	2.516 inch
Width	18 mm	Width (inches)	0.709 inch
Net weight	31 g		

Temperatures

Storage temperature	-25 °C...55 °C	Ambient temperature	-5 °C...40 °C
Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	120 °C

Material data

Material	Polyamide	Colour	grey
UL 94 flammability rating	V-0		

System specifications

End cover plate required	Yes	Number of potentials	1
Number of levels	1	Number of clamping points per level	2
Number of potentials per tier	1	Levels cross-connected internally	No
PE connection	No	Rail	TS 35, TS 32
N-function	No	PE function	No
PEN function	No		

Additional technical data

Explosion-tested version	No	Open sides	right
Snap-on	Yes	Type of mounting	Snap mounting support rail

CSA rating data

Certificate number (cCSAus)	70198655	Wire cross section max. (cCSAusX)	8 AWG
Wire cross section min. (cCSAusX)	22 AWG		

Conductors for clamping (rated connection)

2 x cable lugs DIN 46 234	1.5...35 mm ²	2 x cable lugs DIN 46 235	1.5...35 mm ²
Cable lug to DIN 46234	1.5...35 mm ²	Cable lug to DIN 46235	1.5...35 mm ²
Clamping range, bolted connection , max.	35 mm ²	Clamping range, bolted connection , min.	1.5 mm ²
Clamping range, max.	35 mm ²	Clamping range, min.	1.5 mm ²
Connection cross-section, stranded, max.	35 mm ²	Connection cross-section, stranded, min.	1.5 mm ²
Connection direction	on side	Number of connections	2
Stud size for spade connection	M 6	Tightening torque, max.	3 Nm
Tightening torque, min.	3 Nm	Type of connection	Threaded stud connection
Wire connection cross section AWG, max.	AWG 2	Wire connection cross section AWG, min.	AWG 22
Wire connection cross section, finely stranded, max.	35 mm ²	Wire connection cross section, finely stranded, min.	1.5 mm ²
Wire connection cross-section, solid core, max.	35 mm ²	Wire connection cross-section, solid core, min.	1.5 mm ²

SRL 6

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

General

Rail	TS 35, TS 32	Standards	IEC 60947-7-1
Wire connection cross section AWG, max.	AWG 2	Wire connection cross section AWG, min.	AWG 22

Rating data

Rated cross-section	35 mm ²	Rated voltage	1,000 V
Rated DC voltage	1,000 V	Rated current	125 A
Current at maximum wires	125 A	Standards	IEC 60947-7-1
Volume resistance according to IEC 60947-7-x	0.26 mΩ	Rated impulse withstand voltage	8 kV
Power loss in accordance with IEC 60947-7-x	4 W	Pollution severity	3
Surge voltage category	III		

UL rating data

Certificate No. (cURus)	.	Conductor size Factory wiring max. (cURus)	2 AWG
Conductor size Factory wiring min. (cURus)	22 AWG	Conductor size Field wiring max. (cURus)	2 AWG
Conductor size Field wiring min. (cURus)	22 AWG	Current size B (cURus)	115 A
Current size C (cURus)	115 A	Voltage size B (cURus)	600 V
Voltage size C (cURus)	600 V		

Classifications

ETIM 6.0	EC000897	ETIM 7.0	EC000897
ETIM 8.0	EC000897	ETIM 9.0	EC000897
ETIM 10.0	EC000897	ECLASS 9.0	27-14-11-20
ECLASS 9.1	27-14-11-20	ECLASS 10.0	27-14-11-20
ECLASS 11.0	27-14-11-20	ECLASS 12.0	27-14-11-20
ECLASS 13.0	27-25-01-01	ECLASS 14.0	27-25-01-01
ECLASS 15.0	27-25-01-01		

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

Approvals

Approvals



Approvals MAMID	https://mdcop.weidmueller.com/mediadelivery/rendition/900_319221/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/
ROHS	Conform
UL File Number Search	UL Website
Certificate No. (cURus)	.

SRL 6

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Downloads

Approval/Certificate/Document of Con-
formity

[DE PT1001 20230213 001 ISSUE01](#)

Engineering Data

[CAD data – STEP](#)

User Documentation

[StorageConditionsTerminalBlocks](#)

Catalogues



[Catalogues in PDF-format](#)

SRL 6

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

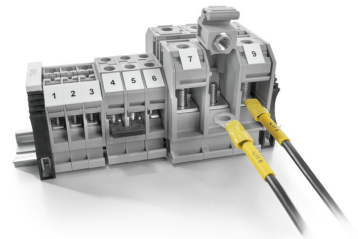

SRL 6

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

SRL-Series

End plates are fitted to the open side of the last modular terminal before the end bracket. The use of an end plate ensures the function of the modular terminal and the specified rated voltage. It guarantees protection against contact with live parts and makes the final terminal finger-proof.

General ordering data

Type	SEP SRL 6	Version
Order No.	2615010000	End plate for terminals, grey, Height: 63.5 mm, Width: 2 mm, V-0,
GTIN (EAN)	4050118653960	Polyamide, Snap-on: Yes
Qty.	50 pc(s).	

Blank



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

Type	WS 10/15 MC NE WS	Version
Order No.	1854090000	WS, Terminal marker, 10 x 15 mm, Pitch in mm (P): 15.00
GTIN (EAN)	4032248390694	Weidmueller, Allen-Bradley, white
Qty.	240 pc(s).	

SRL 6

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Crimp cable lugs



Insulated cable connector in PVC or PC/PA

- Conventional designs
- Not soldered
- With conical entry funnel, except for joint connector

General ordering data

Type	KQI-M6/-1	Version
Order No.	1492230000	cable lug, terminal end, Insulated cable connector, 1 mm ² , 0.5 mm ² - 1
GTIN (EAN)	4050118302400	mm ²
Qty.	100 pc(s).	
Type	KQI-M6/-16	Version
Order No.	1492490000	cable lug, terminal end, Insulated cable connector, 16 mm ² , 16 mm ² -
GTIN (EAN)	4050118302455	16 mm ²
Qty.	50 pc(s).	
Type	KQI-M6/-2,5	Version
Order No.	1492320000	cable lug, terminal end, Insulated cable connector, 2.5 mm ² , 1.5 mm ² -
GTIN (EAN)	4050118302417	2.5 mm ²
Qty.	100 pc(s).	
Type	KQI-M6/-6	Version
Order No.	1492390000	cable lug, terminal end, Insulated cable connector, 6 mm ² , 4 mm ² - 6
GTIN (EAN)	4050118302509	mm ²
Qty.	100 pc(s).	
Type	KQI-M6/-10	Version
Order No.	1492440000	cable lug, terminal end, Insulated cable connector, 10 mm ² , 10 mm ² -
GTIN (EAN)	4050118302356	10 mm ²
Qty.	50 pc(s).	

SRL-Series



Screwable cross-connections are easy to mount and de mount. Thanks to the big contact surface, even high currents can be transmitted with maximum contact reliability.

General ordering data

Type	SQV 6/3	Version
Order No.	2615090000	Cross-connector (terminal), when screwed in, black, grey, 125 A,
GTIN (EAN)	4050118653892	Number of poles: 3, Pitch in mm (P): 18.00, Insulated: No, Width: 43.1
Qty.	50 pc(s).	mm

SRL 6**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Accessories**

Type	SQV 6/2	Version
Order No.	2615080000	Cross-connector (terminal), when screwed in, black, grey, 125 A,
GTIN (EAN)	4050118653908	Number of poles: 2, Pitch in mm (P): 18.00, Insulated: No, Width: 26
Qty.	100 pc(s).	mm
Type	SQV 6/4	Version
Order No.	2615100000	Cross-connector (terminal), when screwed in, black, grey, 125 A,
GTIN (EAN)	4050118653885	Number of poles: 4, Pitch in mm (P): 18.00, Insulated: No, Width: 61.1
Qty.	50 pc(s).	mm