date: 23/10/2026

NIKKO+45/G LED DA

Part number 303108

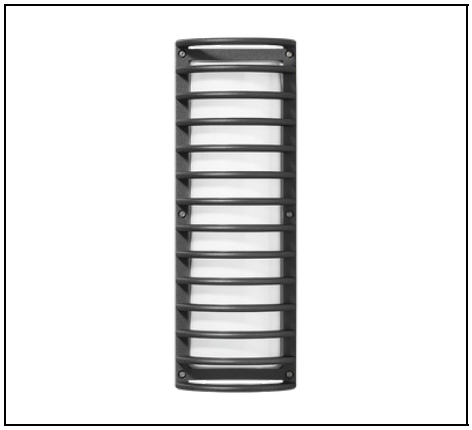

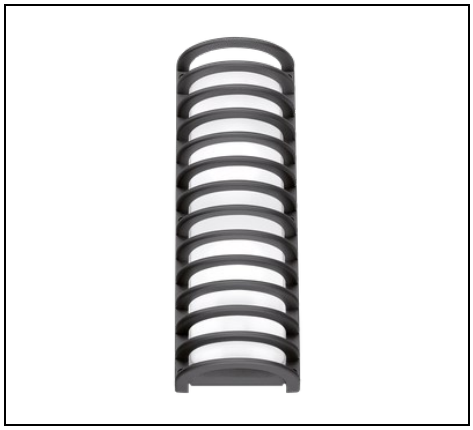

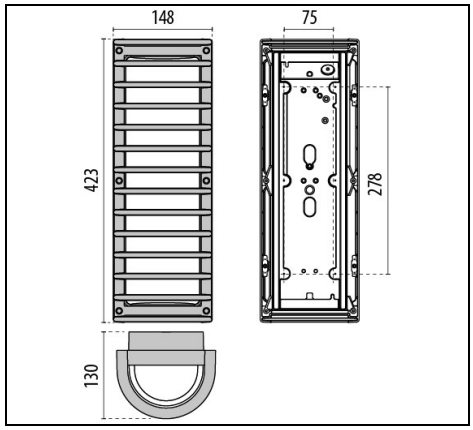

IP 65 | CLASS I

Description

Wall, ceiling, bracket and post mounted luminaire for indoor and outdoor, comprising:
- Aluminium housing and guard (/G), polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Pressed glass diffuser, internally coated, secured with the ring
- Technopolymer silicone sealing gasket
- Stainless steel locking hardware
- DA versions are dual power switch versions, designed with two drivers in parallel. Requires two separate lines
- Design by ROBERTO FIORATO
- Design by ROBERTO FIORATO

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

Product data

ETIM Group:	EG000027	**ETIM Class:**	EC002892

General information

Lampholder:	LED+LED	**Light source:**	LED LED
Lightsource lumen output [lm]:	1086	**Luminaire lumen output [lm]:**	641
Luminaire wattage [W]:	7.5 W + 7.5 W	**Luminous efficacy [lm/W]:**	43
CRI:	80	**Colour temperature [K]:**	3000
Colour / Finishing:	AN-96 / Anthracite gray / Textured	**IP degree of protection:**	IP65
Impact resistance / impact energy:	IK06 1J xx3	**Protection class:**	I
Optic:	S/EW - Symmetric Extra-Wide	**Net weight [kg]:**	3.734
Overall length [mm]:	148	**Overall width [mm]:**	130
Overall height [mm]:	423		

Mechanical features

Shape:	Rectangular	**Housing material:**	Aluminium
Diffuser material:	Glass		

Electrical features

Voltage type:	AC	**Input voltage [V AC]:**	220/240
Input frequency [Hz]:	50/60	**Power factor / COS Φ:**	>0.9
Inrush current [A/µs]:	4 / 50	**C10 1.5 mm²:**	26
C16 2.5 mm²:	42	**B10 1.5 mm²:**	15
B16 2.5 mm²:	25		

Installation

Application area:	Outdoor lighting	**Mounting type:**	Bulkhead
Min. ambient temperature [°C]:	-10	**Max. ambient temperature [°C]:**	35

Light features

MacAdam:	3	**Lumen maintenance:**	L80B10@140000h
Distribution of light emission:	Direct		

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

Photometric data

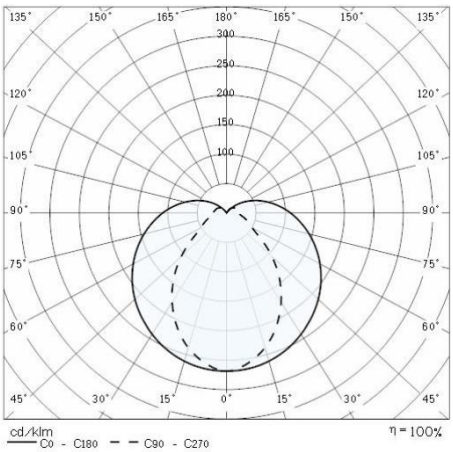

Optional accessories

NIKKO+45



000442

Wall bracket 45

AN-96 / Anthracite gray



000446

Post 45 444 mm

AN-96 / Anthracite gray



000450

Post 45 833 mm

AN-96 / Anthracite gray



000454

Post 45 1233 mm

AN-96 / Anthracite gray

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com