Fuse enclosure

AKi-ST 32



AKi-ST 32

Fuse enclosure

Productnumber: 76632501
Dimensions: 450 x 300 x 210 mm

NH bus-mounting fuse empty enclosure for switchgear, 2 x NH 00 fuse switch disconnector enclosure, Rated current 100 A, Clamp connection 1.5 - 70 mm², Universal output, on 5-pole busbar, with 5 busbar terminals 16 - 70 mm², N terminal 4 - 35 mm², PE terminal 4 - 35 mm², with insulating seals

on busbar system 250 A, with transparent cover

Created at 04.06.2026. All statements without guarantee. We reserve the right to make improvements to technical progress.
Günther Spelsberg GmbH + Co. KG
Im Gewerbepark 1 · D-58579 Schalksmühle · Telefon: +49 (0) 23 55 / 892-0 · Telefax: +49 (0) 23 55 / 892-299

Technical Data

electrical characteristics

Rated operating voltage AC:	690 V
Protection class:	II
Type of protection:	IP54/IP65
Rated current:	100 A
UL Type Rating:	not specified

Colours

Base unit colour:	grey
Cover colour:	transparent

Dimensions

Width:	450 mm
Length:	300 mm
Height:	210 mm
Weight:	7.905 kg

Material characteristics

UV-resistant:	yes
Halogen free:	yes
Flammability class according with UL94:	V2
Glow-wire flammability:	850 °C (EN 60695-2-11)

mechanical properties

Impact strength:	IK08
Sealable:	yes

Ambient conditions

max. relative humidity 25°C:	95 %
max. relative humidity 40°C:	50 %
Min. ambient temperature:	-25 °C

Ambient conditions

Max. ambient temperature:	40 °C
24h ambient temperature:	60 °C
Installation location:	protected outdoor areas

Sales Information

EAN:	4013902885411
ETIM Class:	EC000249
Custom tariff number:	85369095
Minimum order quantity:	1

Material

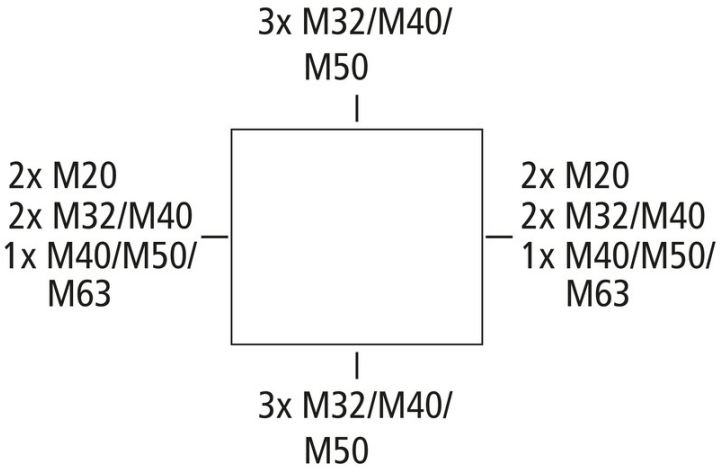
Base unit material:	Polycarbonate
Cover material:	Polycarbonate
Sealing material:	Polyurethane
Cover screw material:	Polyamide, glass-fibre reinforced

Accessories

79300401 - AK ABL-ES - External fixing lugs

07670001 - KP NH 00 - Prism terminal

Cable gland


3x M32/M40/
M50
2x M20
2x M32/M40
1x M40/M50/
M63
2x M20
2x M32/M40
1x M40/M50/
M63
3x M32/M40/
M50