

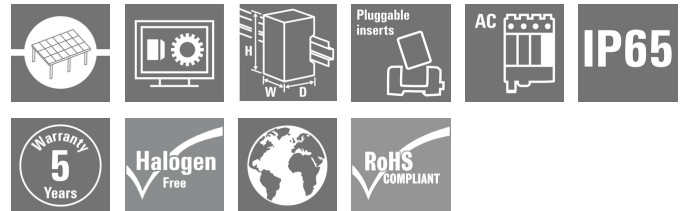
PV CPCI20TXU3DXAXWXR2WW**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Connecting photovoltaic power plants through reliable and safe industrial communications.**

Weidmüller combined its extensive experience with photovoltaic projects and industrial communication to create this portfolio of PV Communication Boxes. For this portfolio we developed 2 different product ranges:

- The “Premium” family is our most robust product. Designed to offer constant connectivity thanks to its back-up power system. And thereby offers you reliability and power in one solution.
- The new “Lite” family offers you the same signal connectivity on site as the “Premium” version, but in a more compact version.

General ordering data

Version	Photovoltaics, Assembled enclosure, Communication module, 230 V AC, Surge protection I, Battery powered, Current monitoring, Monitoring components, Voltage monitoring, Limit value monitoring, Communication Box, RJ45
Order No.	8000119118
Type	PV CPCI20TXU3DXAXWXR2WW
GTIN (EAN)	4099986783300
Qty.	1 pc(s).

PV CPC120TXU3DXAXWXR2WW

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	300 mm	Depth (inches)	11.811 inch
Height	747 mm	Height (inches)	29.409 inch
Width	536 mm	Width (inches)	21.102 inch
Net weight	27,000 g		

Temperatures

Ambient temperature	-10 °C...40 °C
---------------------	----------------

DC electrical properties

Earthing	Directly at the VPU	Rated voltage	230 V
Surge protection AC side	PU I 1+1 LCF 280V/12,5kA, without auxiliary contact	Surge protection WIA RS485 side (string monitoring)	No

DC inputs

Number of conduit inlets	2	Number of inputs	4
--------------------------	---	------------------	---

DC string monitoring

Monitoring function	Industrial PC, Industrial Ethernet managed switch with RJ45 ports, Industrial Ethernet router with RJ45 ports, Connection between field devices to SCADA through RS-485	Supply	Battery PRO ECO 72W 24V 3A
Voltage monitoring	Yes		

Housing

Protection degree	IP65	Type of mounting	Wall mounting
-------------------	------	------------------	---------------

Norms and standards

Standards	IEC 61439-2 ed 3.0, EN 61439-2:2020
-----------	--

Guarantee

Time interval	5 years
---------------	---------

Classifications

ETIM 6.0	EC002928	ETIM 7.0	EC002928
ETIM 8.0	EC003857	ETIM 9.0	EC003857
ETIM 10.0	EC003857	ECLASS 9.0	22-57-92-03
ECLASS 9.1	22-57-02-90	ECLASS 10.0	22-57-02-90
ECLASS 11.0	22-57-02-92	ECLASS 12.0	22-57-02-92
ECLASS 13.0	22-57-02-92	ECLASS 14.0	22-57-02-92
ECLASS 15.0	22-57-02-92		

PV CPC120TXU3DXAXWXR2WW

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Environmental Product Compliance

RoHS Compliance Status	Compliant with exemption
RoHS Exemption (if applicable/known)	6c, 7a, 7cl
REACH SVHC	Lead 7439-92-1

Approvals

Approvals



Approvals MAMID	https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/
ROHS	Conform

Downloads

Approval/Certificate/Document of Conformity	Declaration of of conformity utility communication boxes
Engineering Data	Thermal Report
Technical Documentation	Mechanical Drawing
User Documentation	PV Communication Box User Manual
Catalogues	Catalogues in PDF-format

PV CPCI20TXU3DXAXWXR2WW

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

