
Direct terminal clamp

KU 400

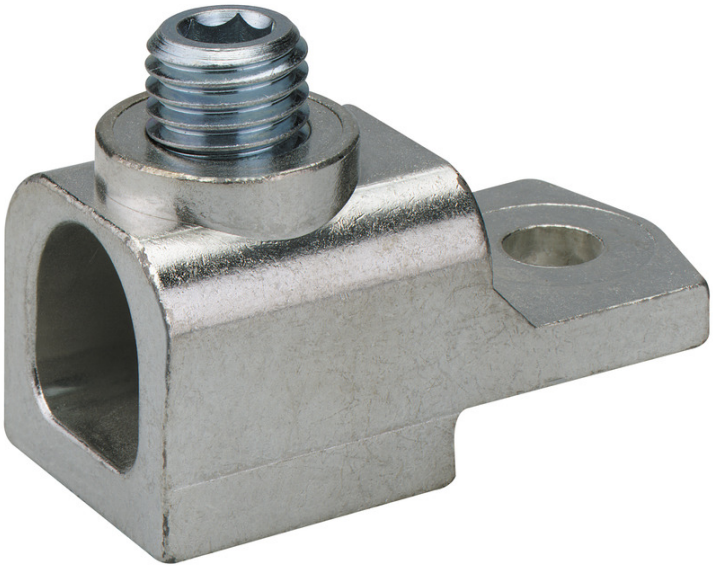

KU 400

Direct terminal clamp

Productnumber: 07640001
Dimensions: 170 x 120 x 40 mm

Direct terminal, universal, for aluminium and copper conductors, from KU 250 also for laminated flat cable

Direct terminal M10 for conductors, 50-240 mm² (flexible up to 300 mm²), 16-95 mm² and laminated flat copper 22 x 13 mm, for load break switch GTE 440

Created at 04.06.2026. All statements without guarantee. We reserve the right to make improvements to technical progress.
Günther Spelsberg GmbH + Co. KG
Im Gewerbepark 1 · D-58579 Schalksmühle · Telefon: +49 (0) 23 55 / 892-0 · Telefax: +49 (0) 23 55 / 892-299

Technical Data

electrical characteristics

shockproof:	No
Connection 1: Connection type:	Screws
Connection 1: Clamping points per pole:	1
Connection 1: Connectable conductor cross-section, single-wire (min):	50 mm²
Connection 1: Connectable conductor cross-section, single-wire (max):	300 mm²
Connection 1: Connectable conductor cross-section, stranded (min):	50 mm²
Connection 1:Connectable conductor cross-section, stranded (max):	240 mm²

Dimensions

Width:	170 mm
Length:	120 mm
Height:	40 mm
Weight:	0.183 kg

Sales Information

EAN:	4013902055173
ETIM Class:	EC002498
Custom tariff number:	85369010
Minimum order quantity:	1