Dome funnel

U 71 KUT



U 71 KUT

Dome funnel

Productnumber: 97054001
Dimensions: 71 x 71 x 62 mm

Dome funnel, as a ceiling outlet for internal partition or as luminaire outlet, combinable with normal 71 mm spacing, with smooth face, suitable for all types of formwork and opposing formwork, protection class IP30, rated insulation voltage: 400V AC, Halogen free, Number of 45° insertions: 4

2-part, adhesive fixing or nail installation, sealing range M16 - M25, support spar compatible

Technical Data

electrical characteristics

Rated insulation voltage AC:	400 V
Type of protection:	IP30
Suitable for:	Concrete construction

Dimensions

Width:	71 mm
Length:	71 mm
Height:	62 mm
Weight:	0.03 kg

Material characteristics

Halogen free:	yes
Flammability class according with UL94:	HB
Glow-wire flammability:	650 °C (EN 60695-2-11)

mechanical properties

Type of fastening:	adhesive fixing or nail installation

Ambient conditions

max. relative humidity 25°C:	- %
max. relative humidity 40°C:	50 %
Min. ambient temperature:	-25 °C
Max. ambient temperature:	40 °C
24h ambient temperature:	35 °C

Sales Information

EAN:	4013902180172
ETIM Class:	EC002328
Custom tariff number:	39269097
Minimum order quantity:	1

Material

Base unit material:	Polypropylene
Cover material:	Polypropylene

Accessories

97822301 - IBT LZA-23 - Hole punch

97821801 - IBT LZA-18 - Hole punch

97820001 - IBT LZA-OE - Hole punch

19599501 - LFR - Stepped drill

97292501 - U 71 TD-44 - Deep box

97924001 - NAS-AL - IBT Accessories

97924201 - NA-AL - IBT Accessories


97924301 - NA-AL/gl - IBT Accessories

97022501 - RVB 25 - Conduit coupling

97294501 - U 71 TD-49 - Deep box

97912001 - DH 65-M5 - ceiling hook

Cable gland

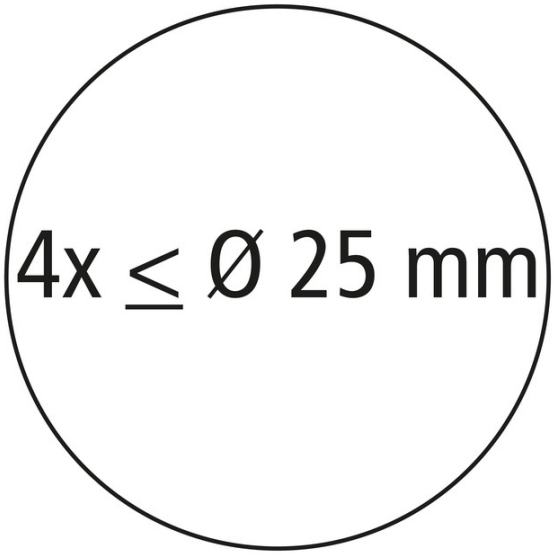

Created at 04.06.2026. All statements without guarantee. We reserve the right to make improvements to technical progress.
Günther Spelsberg GmbH + Co. KG
Im Gewerbepark 1 · D-58579 Schalksmühle · Telefon: +49 (0) 23 55 / 892-0 · Telefax: +49 (0) 23 55 / 892-299