

HDC 16A TSLU 1PG16G**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**IP65**

The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

General ordering data

Version	HDC enclosures, Size: 5, Protection degree: IP65 (in plugged condition), Cable entry from side, Plug housing, End-locking clamp, lower side, Standard, Size of cable entries: PG 16
Order No.	1664690000
Type	HDC 16A TSLU 1PG16G
GTIN (EAN)	4008190421397
Qty.	1 pc(s).

HDC 16A TSLU 1PG16G**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Depth	89 mm	Depth (inches)	3.504 inch
Height	58 mm	Height (inches)	2.283 inch
Width	32.5 mm	Width (inches)	1.28 inch
Net weight	126 g		

Temperatures

Limit temperature	-40 °C ... 125 °C
-------------------	-------------------

Dimensions

Cable entry	w. thread	Height of housing B	58 mm
Total length housing	79 mm	Width housing C	29.5 mm

General data

EMC housings	No	Housing main material	diecast aluminium
Material of locking element		Protection degree	IP65 (in plugged condition)
	Stainless steel, rust-proof		
Surface finish	Powder coating	Tightening torque	0.5 Nm

Version

BG	5	Cable entry	w. thread
Clamp version	End-locking clamp	Colour (RAL)	RAL 7035
Design		Design of housing	Cable entry from side, Plug housing
	Standard		
Design of locking system	End-locking clamp, lower side	Internal thread	PG 16
Number of cable entry on top	0	Number of cable entry sideways	1
Sealing	NBR	Size	5
Size of cable entries	PG 16	Suitable for ModuPlug®	No
Tightening torque	0.5 Nm	Top part/bottom part/lid	upper part
Type	Plug		

Classifications

ETIM 6.0	EC000437	ETIM 7.0	EC000437
ETIM 8.0	EC000437	ETIM 9.0	EC000437
ETIM 10.0	EC000437	ECLASS 9.0	27-44-02-02
ECLASS 9.1	27-44-02-02	ECLASS 10.0	27-44-02-02
ECLASS 11.0	27-44-02-02	ECLASS 12.0	27-44-02-02
ECLASS 13.0	27-44-02-02	ECLASS 14.0	27-44-02-02
ECLASS 15.0	27-44-02-02		

Substance	Acetone
Chemical resistance	Conditionally resistant
Substance	Drilling oil
Chemical resistance	Resistant
Substance	Diesel
Chemical resistance	Resistant
Substance	Ethyl alcohol

HDC 16A TSLU 1PG16G

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Chemical resistance	Resistant
Substance	Transmission oil
Chemical resistance	Resistant
Substance	Hydraulic oil
Chemical resistance	Resistant
Substance	Coolant
Chemical resistance	Resistant
Substance	Petroleum benzine
Chemical resistance	Resistant
Substance	Sweat
Chemical resistance	Resistant
Substance	Premium gasoline
Chemical resistance	Conditionally resistant
Substance	Water
Chemical resistance	Resistant
Substance	UV
Chemical resistance	Unstable
Substance	Ozone
Chemical resistance	Unstable

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%
Chemical resistance	de.myview.objectmodel.impl.BlockImpl@41a6581b de.myview.objectmodel.impl.BlockImpl@7261f154 de.myview.objectmodel.impl.BlockImpl@43451e4d de.myview.objectmodel.impl.BlockImpl@29aece2e de.myview.objectmodel.impl.BlockImpl@5abb2d80 de.myview.objectmodel.impl.BlockImpl@27ad9cd2 de.myview.objectmodel.impl.BlockImpl@4cf1491c de.myview.objectmodel.impl.BlockImpl@13712112 de.myview.objectmodel.impl.BlockImpl@1025d9d1 de.myview.objectmodel.impl.BlockImpl@5ba58c0b de.myview.objectmodel.impl.BlockImpl@1dda97ca de.myview.objectmodel.impl.BlockImpl@7394cd2 de.myview.objectmodel.impl.BlockImpl@396cf6b5

Approvals

Approvals



Approvals MAMID	https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/
ROHS	Conform
UL File Number Search	UL Website
Certificate No. (cURus)	E92202

HDC 16A TSLU 1PG16G

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Downloads

Approval/Certificate/Document of Conformity

[Manufacturer's declaration](#)

Engineering Data

[CAD data – STEP](#)

Product Change Notification

[20220214 Technical change to HDC housings](#)

[20220214 Technische Änderung bei HDC-Gehäusen](#)

Technical Documentation

[1664690000 HDC_16A_TSLU_1PG16G_STP_Blatt_1.pdf](#)

Catalogues

[Catalogues in PDF-format](#)

Brochures

[FL FIELDWIRING EN](#)

[FL FIELDWIRING EN](#)

HDC 16A TSLU 1PG16G

Weidmüller Interface GmbH & Co. KG


Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Drawings

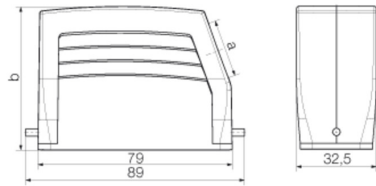

HDC 16A TSLU 1PG16G

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Base housing



The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

General ordering data

Type	HDC 16A SLU 2PG16G	Version
Order No.	1665070000	HDC enclosures, Size: 5, Protection degree: IP65 (in plugged condition), Base housing, End-locking clamp, lower side, Standard,
GTIN (EAN)	4008190421779	Size of cable entries: PG 16
Qty.	1 pc(s).	
Type	HDC 16A SLU 1M25G	Version
Order No.	1902330000	HDC enclosures, Size: 5, Protection degree: IP65, IP65 (in plugged condition), Base housing, End-locking clamp, lower side, Standard,
GTIN (EAN)	4032248591916	Size of cable entries: M 25
Qty.	1 pc(s).	
Type	HDC 16A SLU 2M25G	Version
Order No.	1788760000	HDC enclosures, Size: 5, Protection degree: IP65 (in plugged condition), Base housing, End-locking clamp, lower side, Standard,
GTIN (EAN)	4032248206308	Size of cable entries: M 25
Qty.	1 pc(s).	
Type	HDC 16A SLU 1PG21G	Version
Order No.	1665090000	HDC enclosures, Size: 5, Protection degree: IP65 (in plugged condition), Base housing, End-locking clamp, lower side, Standard,
GTIN (EAN)	4008190421793	Size of cable entries: PG 21
Qty.	1 pc(s).	
Type	HDC 16A SLU 2M20G	Version
Order No.	1788770000	HDC enclosures, Size: 5, Protection degree: IP65 (in plugged condition), Base housing, End-locking clamp, lower side, Standard,
GTIN (EAN)	4032248206315	Size of cable entries: M 20
Qty.	1 pc(s).	

HDC 16A TSLU 1PG16G

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Bulkhead housing



The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

General ordering data

Type	HDC 16A ALU	Version
Order No.	1664920000	HDC enclosures, Size: 5, Protection degree: IP65 (in plugged condition), Bulkhead housing, End-locking clamp, lower side, Standard
GTIN (EAN)	4008190421625	
Qty.	1 pc(s).	

Cover



The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

General ordering data

Type	HDC 16A DODL 1LB	Version
Order No.	1665900000	HDC enclosures, Size: 5, Protection degree: IP65 (in plugged condition), Cover for lower part of housing, End-locking clamp, lower side, Standard
GTIN (EAN)	4008190422936	
Qty.	1 pc(s).	

HDC 16A TSLU 1PG16G

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Coupling housing



The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

General ordering data

Type	HDC 16A KLU 1M25G	Version
Order No.	1788800000	HDC enclosures, Size: 5, Protection degree: IP65 (in plugged condition), Coupling housing, End-locking clamp, lower side, Standard,
GTIN (EAN)	4032248206346	Size of cable entries: M 25
Qty.	1 pc(s).	
Type	HDC 16A KLU 1PG16G	Version
Order No.	1665450000	HDC enclosures, Size: 5, Protection degree: IP65 (in plugged condition), Coupling housing, End-locking clamp, lower side, Standard,
GTIN (EAN)	4008190422158	Size of cable entries: PG 16
Qty.	1 pc(s).	