
# SMALL LINE SL REFLECTOR

## Part number 8726741595410





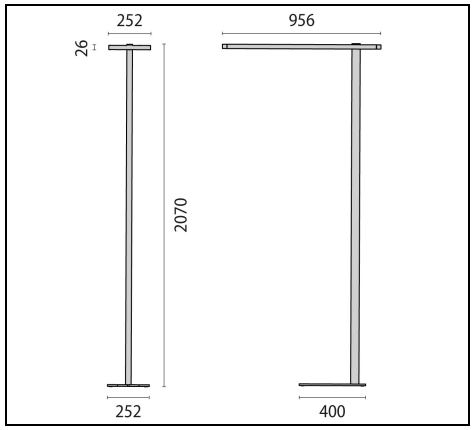


IP 20 | CLASS I | DALI | TOUCH | CE | UKCA | EN

### Description

Free-standing (SL) LED luminaire for indoor, comprising:
- Pole and light plate made of extruded aluminium profile, head piece made of die cast aluminium, sheet steel base, powder-coated
- Slender plates with open spaces give the luminaire a uniquely delicate design
- Practical U-shaped base enables luminaire to be positioned flexibly and flush to a writing desk

The luminaire is available with different light engines:
- Gear tray with high-shine multifaceted reflectors (metallized with ultra-pure aluminium) for maximum luminaire efficiency and neutral colour rendering
- Direct / indirect light distribution
- Direct and indirect portions individually dimmable using TouchDIM® (for version with sensor: direct and indirect portions dimmable in tandem using TouchDIM®)
- Colour tolerance according to MacAdam ≤ 3 SDCM
- VDU application suitable acc. to EN 12464-1
- Special colour versions available. Consult factory
- Design by BÜRO SOMMER
- Design by BÜRO SOMMER

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
**PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy**
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

**info.it@pil.lighting**
www.performanceinlighting.com

## Product data

| | | | |
|---|---|---|---|
| **ETIM Group:** | EG000027 | **ETIM Class:** | EC000300 |

## General information

| | | | |
|---|---|---|---|
| **Lampholder:** | LED | **Light source:** | LED |
| **Lightsource lumen output [lm]:** | 10770 | **Luminaire lumen output [lm]:** | 7940 |
| **Luminaire wattage [W]:** | 61 W | **Luminous efficacy [lm/W]:** | 126 |
| **CRI:** | 80 | **Colour temperature [K]:** | 4000 |
| **Colour / Finishing:** | WH-RAL9016 / White RAL9016 / Textured | **IP degree of protection:** | IP20 |
| **Impact resistance / impact energy:** | IK05 0.7J xx3 | **Protection class:** | I |
| **Optic:** | S/C - Symmetric direct-indirect | **Beam angle:** | 2 x 42° |
| **Net weight [kg]:** | 10.7 | **Overall length [mm]:** | 252 |
| **Overall width [mm]:** | 956 | **Overall height [mm]:** | 2070 |

## Mechanical features

| | | | |
|---|---|---|---|
| **Shape:** | Rectangular | **Housing material:** | Aluminium |
| **Diffuser material:** | No diffuser | **Glow wire test [°C]:** | 650 °C |

## Electrical features

| | | | |
|---|---|---|---|
| **Voltage type:** | AC | **Input voltage [V AC]:** | 220/240 |
| **Input frequency [Hz]:** | 220-240V 50/60Hz | **Power factor / COS Φ:** | 0.9 |
| **Input voltage [V DC]:** | 176/280 | **Inrush current [A/µs]:** | 35 / 170 |
| **C10 1.5 mm²:** | 21 | **C16 2.5 mm²:** | 35 |
| **B10 1.5 mm²:** | 13 | **B16 2.5 mm²:** | 21 |
| **EEI:** | A2 | | |

## Installation

| | | | |
|---|---|---|---|
| **Application area:** | Indoor lighting | **Mounting type:** | Free standing |
| **Min. ambient temperature [°C]:** | 10 | **Max. ambient temperature [°C]:** | 40 |

## Light features


| | | | |
|---|---|---|---|
| **MacAdam:** | 3 | **Lumen maintenance:** | L80B10@50000h |
| **Distribution of light emission:** | Direct/Indirect | **DFF - Downward Flux Fraction [%]:** | 46 |
| **UFF - Upward Flux Fraction [%]:** | 54 | **UGR max.:** | 9.0 |

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
**PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy**
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

**info.it@pil.lighting**
www.performanceinlighting.com

## Photometric data

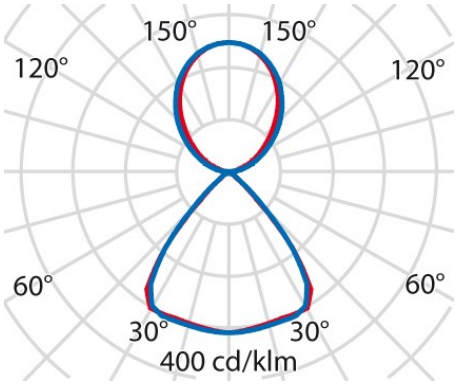


To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
**PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy**
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

**info.it@pil.lighting**
www.performanceinlighting.com