


RS F10 I/O8 LMZF

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

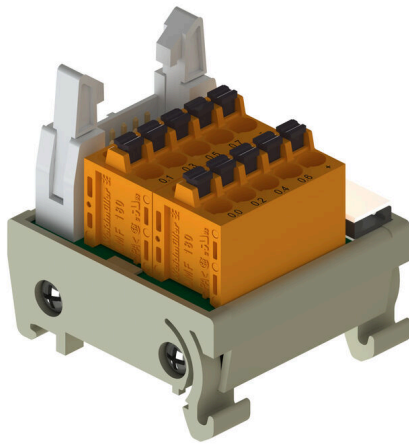

Passive RS F40 or RS F10 interface elements for 32 or 8 signals: these enable an efficient connection of peripherals (sensors and actuators) to the input/output modules of the PLC using pre-assembled cables.

The main characteristics are:

- Tension-clamp or screw connection system
- Signals grouped according to bytes.
- 1-, 2- or 3-wire technology.
- Extremely compact modules in RS 45 profile section for installation on standard TS35 mounting rail.

General ordering data

Version	Interface, RSF, 1-wire, Tension-clamp connection
Order No.	8428870000
Type	RS F10 I/O8 LMZF
GTIN (EAN)	4008 190030582
Qty.	1 items

RS F10 I/O8 LMZF

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Approvals

Approvals



ROHS Conform

Dimensions and weights

Depth	54 mm	Depth (inches)	2.126 inch
Height	45 mm	Height (inches)	1.7716 inch
Width	43 mm	Width (inches)	1.6929 inch
Net weight	65.2 g		

Temperatures

Storage temperature	-40...70 °C	Operating temperature	0...55 °C
---------------------	-------------	-----------------------	-----------

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

Connection data

Number of poles (control side)	10-pole	Connection supply	LMNZF 5.08mm
Wiring system	1-wire	Connection (field side)	LMNZF 5.08mm
Connection on control side	Plug-in connector in acc. with IEC60603-13 / DIN41651		

Ratings data

Max. current per channel	1 A
--------------------------	-----

Insulation coordination (EN50178)

According to	DIN EN 50178	Rated insulation voltage	60 V AC
Surge voltage category	II	Pollution severity level	2
Insulation test voltage AC	0.38 kV		

Connection field

Min. wire cross-section, AWG	AWG 26	Type of connection	Tension-clamp connection
Sleeve with plastic collar, max.	2.5 mm ²	Flexible with sleeve, max.	1.5 mm ²
Flexible, max. H05(07) V-K	1.5 mm ²	Flexible, min. H05(07) V-K	0.5 mm ²
Solid, max. H05(07) V-U	1.5 mm ²	Solid, min. H05(07) V-U	0.5 mm ²
Stripping length	7 mm	Clamping range, max.	1.5 mm ²
Clamping range, min.	0.5 mm ²	Max. wire cross-section, AWG	AWG 14

Supply connection

Type of connection	Tension-clamp connection	Clamping range, min.	0.5 mm ²
Clamping range, max.	1.5 mm ²	Solid, min. H05(07) V-U	0.5 mm ²
Solid, max. H05(07) V-U	1.5 mm ²	Flexible, min. H05(07) V-K	0.5 mm ²
Flexible, max. H05(07) V-K	1.5 mm ²	Flexible with sleeve, max.	1.5 mm ²

RS F10 I/O8 LMZF

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Wire cross-section, min. AWG	AWG 26	Wire cross-section, max. AWG	AWG 14
Stripping length	7 mm		

Classifications

ETIM 8.0	EC002780	ETIM 9.0	EC002780
ETIM 10.0	EC002780	ECLASS 14.0	27-14-11-52
ECLASS 15.0	27-14-11-52		

RS F10 I/O8 LMZF

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

