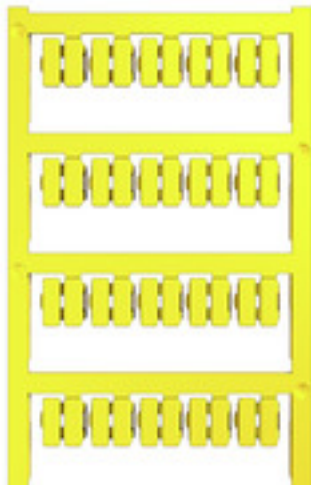


**SFC-DS 1/12 MC NE GE****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

SFC – SlimFix Clip MultiCard with two labelling fields  
For conductor markers, it is often required to quickly read the start and destination designation of the respective conductor. Here it makes sense to print both data directly on a marker.

The new SFC-DS markers are designed as MultiCards and are suitable for direct printing with our PrintJet printing system. Their two labelling areas allow multiple data to be printed on a single marker. The print data can be imported directly from CAE projects into the M-Print® PRO marking software. After printing, the markers are placed around the conductor and securely fixed with a special locking mechanism.

**General ordering data**

|            |                                                  |
|------------|--------------------------------------------------|
| Version    | Conductor and cable markers, 12 x 5.2 mm, yellow |
| Order No.  | <a href="#">2905060000</a>                       |
| Type       | SFC-DS 1/12 MC NE GE                             |
| GTIN (EAN) | 4099986918641                                    |
| Qty.       | 200 pc(s).                                       |

## SFC-DS 1/12 MC NE GE

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|            |         |                 |            |
|------------|---------|-----------------|------------|
| Depth      | 4 mm    | Depth (inches)  | 0.157 inch |
| Height     | 12 mm   | Height (inches) | 0.472 inch |
| Width      | 5.2 mm  | Width (inches)  | 0.205 inch |
| Net weight | 0.309 g |                 |            |

## General data

|                                   |            |                                   |         |
|-----------------------------------|------------|-----------------------------------|---------|
| Colour                            | yellow     | Halogen                           | No      |
| Operating temperature range, max. | 100 °C     | Operating temperature range, min. | -40 °C  |
| Printed characters                | without    | Type of printing                  | neutral |
| UL 94 flammability rating         | UL 94, V-2 | Width                             | 5.2 mm  |

## Conductor and cable markers

|                               |                     |                                  |                     |
|-------------------------------|---------------------|----------------------------------|---------------------|
| Conductor O.D., max.          | 3.3 mm              | Conductor O.D., min.             | 2 mm                |
| Conductor cross-section, max. | 2.5 mm <sup>2</sup> | Cross-section for connected wire | 2.5 mm <sup>2</sup> |
| Halogen                       | No                  |                                  |                     |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001530    | ETIM 7.0    | EC001530    |
| ETIM 8.0    | EC001530    | ETIM 9.0    | EC001530    |
| ETIM 10.0   | EC001530    | ECLASS 9.0  | 27-40-04-01 |
| ECLASS 9.1  | 27-40-04-01 | ECLASS 10.0 | 27-40-04-01 |
| ECLASS 11.0 | 27-28-11-02 | ECLASS 12.0 | 27-28-11-02 |
| ECLASS 13.0 | 27-28-11-02 | ECLASS 14.0 | 27-28-11-02 |
| ECLASS 15.0 | 27-28-11-02 |             |             |

## Environmental Product Compliance

|                        |                             |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC             | No SVHC above 0.1 wt%       |

## Approvals

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

## Downloads

|            |                                          |
|------------|------------------------------------------|
| Catalogues | <a href="#">Catalogues in PDF-format</a> |
|------------|------------------------------------------|

**SFC-DS 1/12 MC NE GE**

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

