
Universal mounting enclosure

K4-H-P EK

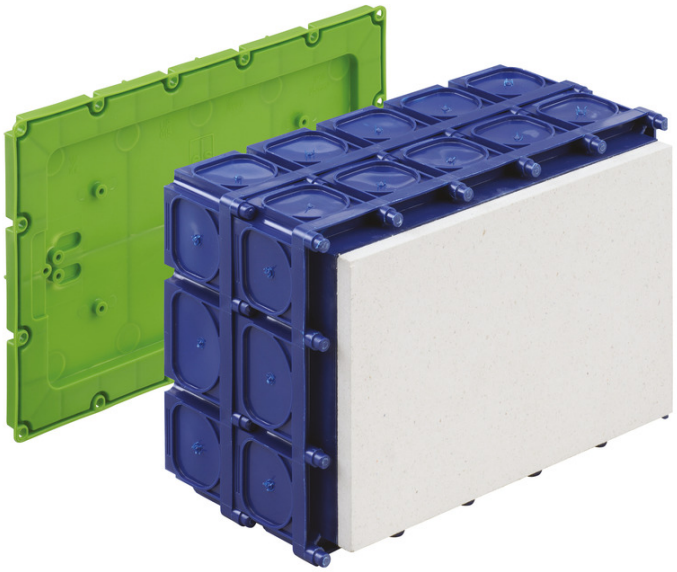

K4-H-P EK

Universal mounting enclosure

Productnumber: 98000601
Dimensions: 311 x 202 x 158 mm

Universal mounting enclosure, suitable to take a 40-pole telephone terminal strip, as a telephone continuity box acc. to DIN 47614-615 or as a small distribution board in combination with the UP 015 (1-row, 15 distribution units), protection class IP30, rated insulation voltage: 400V AC, Halogen free

Fermacell® plasterboard with recess (max. load-bearing capacity 10 kg), variable to max. 220 x 150 mm, max. installation height LV lights: 130 mm, HV lights: 135 mm, electronic transformer up to max. 150 VA, lamp output max. 50W/LED 40W, magnet and nail installation, membrane for perforation, sealing range M16 - M50, support spar compatible

Created at 04.06.2026. All statements without guarantee. We reserve the right to make improvements to technical progress.
Günther Spelsberg GmbH + Co. KG
Im Gewerbepark 1 · D-58579 Schalksmühle · Telefon: +49 (0) 23 55 / 892-0 · Telefax: +49 (0) 23 55 / 892-299

Technical Data

electrical characteristics

Rated insulation voltage AC:	400 V
Type of protection:	IP30
Suitable for:	Concrete construction
UL Type Rating:	not specified

Colours

Cover colour:	other

Dimensions

Width:	311 mm
Length:	202 mm
Height:	158 mm
Weight:	1.4 kg

Material characteristics

Halogen free:	yes
Flammability class according with UL94:	HB
Glow-wire flammability:	650 °C (EN 60695-2-11)

mechanical properties

Type of fastening:	magnet and nail installation

Ambient conditions

max. relative humidity 25°C:	- %
max. relative humidity 40°C:	50 %
Min. ambient temperature:	-25 °C
Max. ambient temperature:	40 °C
24h ambient temperature:	35 °C

Sales Information

EAN:	4013902933716
ETIM Class:	EC002601
Custom tariff number:	39269097
Minimum order quantity:	2

Material

Base unit material:	Polypropylene
Cover material:	Polypropylene

Accessories

98010401 - K4 VD - sealing plate

19599501 - LFR - Stepped drill

97022001 - RVB 20 - Conduit coupling

97022501 - RVB 25 - Conduit coupling

97023201 - RVB 32 - Conduit coupling

97024001 - RVB 40 - Conduit coupling

97810001 - IBT LZA-OE - Hole punch

97811801 - IBT LZA-18 - Hole punch

97812301 - IBT LZA-23 - Hole punch

97881401 - IBT STE-LST/14 - Punch set

97881801 - IBT STE-LST/18 - Punch set

97882301 - IBT STE-LST/23 - Punch set

97883001 - IBT STE-LST/30 - Punch set

97883901 - IBT STE-LST/39 - Punch set

97891401 - IBT STE-LZA/14 - Punch set

97891801 - IBT STE-LZA/18 - Punch set

97892301 - IBT STE-LZA/23 - Punch set

97915501 - WED - Expansion mandrel

97924001 - NAS-AL - IBT Accessories

97924201 - NA-AL - IBT Accessories

97924301 - NA-AL/gl - IBT Accessories

97926001 - ANSW - IBT Accessories

97953601 - STH-ELP - Cartridge insert

97957001 - STH 70 - Support spar

97959001 - STH 90 - Support spar

97960001 - STH 100 - Support spar

97961001 - STH 110 - Support spar

97963001 - STH 130 - Support spar

97964001 - STH 140 - Support spar

97965001 - STH 150 - Support spar

97967001 - STH 170 - Support spar

97969001 - STH 190 - Support spar

97973001 - STH 230 - Support spar

97974001 - STH 240 - Support spar

97979001 - STH 290 - Support spar

Cable gland

