
Terminal

URS RK1-150mm²

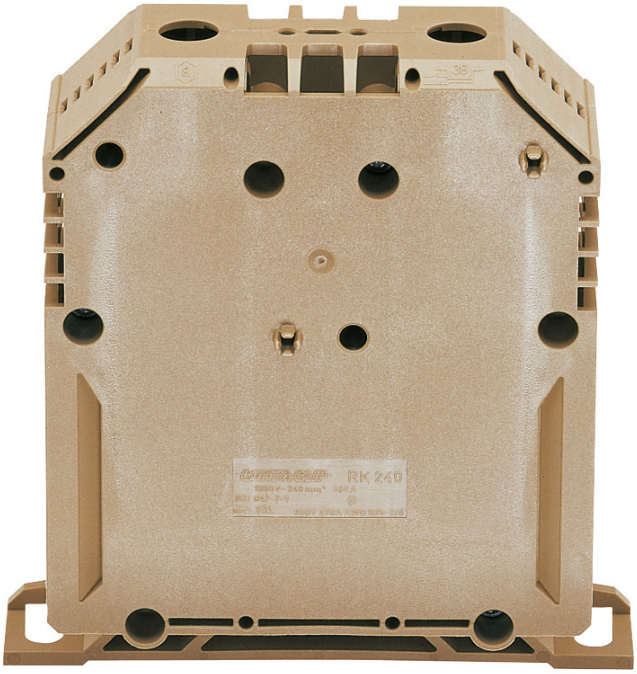

URS RK1-150mm²

Terminal

Productnumber: 67065001
Dimensions: 31 x 109 x 99 mm

Connecting terminal, 1-pole, stackable, for one or more-wired leads and for laminated flat copper

Upgrade kit for 5-pole 1-pole

Technical Data

electrical characteristics

Rated operating voltage AC:	690 V
Rated operating voltage DC:	750 V
Rated insulation voltage AC:	1000 V
Rated connecting capacity:	150 mm²
Rated current:	309 A
Number of poles:	1
shockproof:	No
Connection 1: Connection type:	Screws
Connection 1: Strip length:	38 mm
Connection 1: Clamping points per pole:	2
Connection 1: Suitable for Cu conductors:	1
Connection 1: Suitable for Al conductors:	1
Connection 1: Connectable conductor cross-section, fine-wire without ferrule (min):	50 mm²
Connection 1: Connectable conductor cross-section, fine-wire without ferrule (max):	150 mm²
Connection 1: Connectable conductor cross-section, fine-wire with ferrule (min):	50 mm²
Connection 1: Connectable conductor cross-section, fine-wire with ferrule (max):	150 mm²
Connection 1: Connectable conductor cross-section, single-wire (min):	35 mm²
Connection 1: Connectable conductor cross-section, single-wire (max):	150 mm²
Connection 1: Connectable conductor cross-section, stranded (min):	50 mm²
Connection 1:Connectable conductor cross-section, stranded (max):	150 mm²

Dimensions

Width:	31 mm
Length:	109 mm
Height:	99 mm

Dimensions

Weight:	0.305 kg

Material characteristics

Flammability class according with UL94:	V2

mechanical properties

Connection 1: Tightening moment:	20 Nm

Sales Information

EAN:	4013902859313
ETIM Class:	EC000897
Custom tariff number:	85369010
Minimum order quantity:	1

Material

Insulating body material:	Thermoplastic