

Data sheet

Industry patch cord RJ45 Cat.6A PUR 10.0 m

Page 1/7

P/N


142M2X55100

EAN 4251394602769


2026/09/04

Version: K


Illustrations

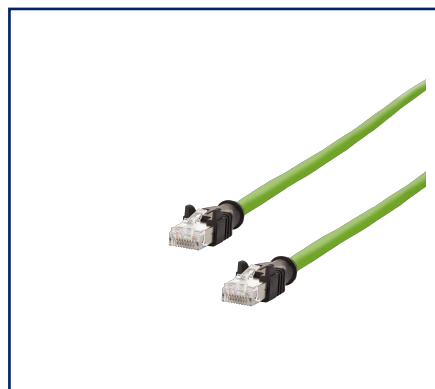

Dimensional drawing

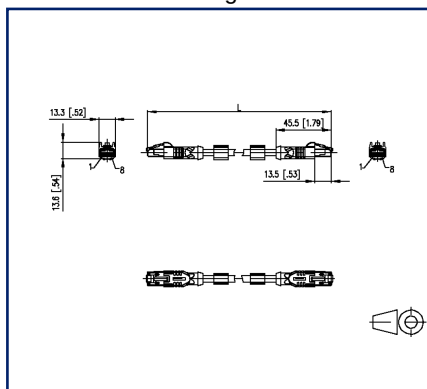

Wiring diagram

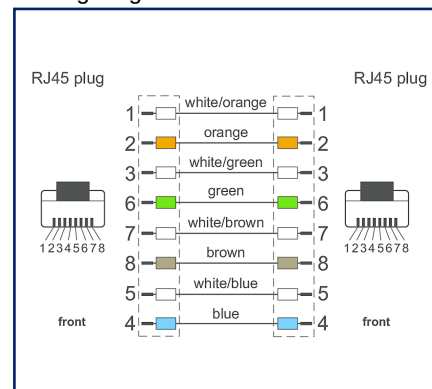

See enlarged drawings at the end of document

Product specification

Shielded PUR cable for safe and industrial data transmission in automation and fieldbus technology. The cable fulfils the requirements according to ULStyle 20963 and complies with the specifications according to Cat7 (electrical properties based on EN50288-4-2). The materials and the constructive design allow increased mechanical load (abrasion, bending, vibration, etc.) of the cable. Special properties: UL style 20963, seawater resistant, recyclable, LABS-free, RoHs compliant, acid and alkali resistant, UV-resistant, hydrolysis-resistant, halogen-free, oil-resistant, high flexibility, no corrosive gases, microbe-resistant, no fire propagation

- fully shielded RJ45 patchcord Cat.6A AWG 26/7
- suitable for 10 GBit Ethernet (IEEE 802.3an)
- cable boot moulded with integrated latching lever protection
- cable jacket PUR
- standard variants: 1.0 m, 2.0 m, 5.0 m, 10.0 m
- other cable lengths on request

Data sheet

Page 2/7

Industry patch cord RJ45 Cat.6A PUR 10.0 m

P/N

142M2X55100

EAN 4251394602769

2026/09/04

Version: K

Technical Data

General Data

Fields of application	Industrial Ethernet harsh environment
Design	Ethernet-Connection line
Shielding	shielded
Transmission technology	Copper
Cable Type	S/FTP
Number of twisting elements	4
Twisting element	Pair
Wiring	T568B
Color coding fiber/ wire(s)	white/orange, orange, white/green, green, white/brown, brown, white/blue, blue
Color	green
Dimensions	
Dimension - Interface 1 (L x W x H)	45.5 mm x 13.3 mm x 13.6 mm
Dimension - Interface 1 (L x W x H)	1.791 in. x 0.524 in. x 0.535 in.
Dimension - Interface 2 (L x W x H)	45.5 mm x 13.3 mm x 13.6 mm
Dimension - Interface 2 (L x W x H)	1.791 in. x 0.524 in. x 0.535 in.
Cable length (m)	10 m
Weight	48 kg/km
Labeling option	identification label carrier

Transmission characteristics

Category (ISO)	6 _A
----------------	----------------

Connections/interfaces

Connector technology interface 1	RJ45 plug
Connector technology interface 2	RJ45 plug
Number of positions/contacts interface 1	8
Number of positions/contacts interface 2	8
Termination data, stranded wire (min. - max.)	
Conductor cross section, stranded wire	AWG 26/7
Conductor diameter, stranded wire (bare copper)	0.48 mm
Conductor diameter, stranded wire (bare copper)	0.019 in.



Data sheet

Page 3/7

Industry patch cord RJ45 Cat.6A PUR 10.0 m

P/N

142M2X55100

EAN 4251394602769

2026/09/04

Version: K

Technical Data

Connections/interfaces

Cable sheath diameter (min. - max.)

Cable sheath diameter	6.4 mm
-----------------------	--------

Cable sheath diameter	0.236 in.
-----------------------	-----------

Electrical characteristics

Current carrying capacity	1 A at 40 °C
---------------------------	--------------

Rated voltage	60 V DC
---------------	---------

Insulation resistance	min. 100 MOhm
-----------------------	---------------

Mechanical data

Life - Number of mating cycles	min. 750
--------------------------------	----------

Bending radius without load	min. 64 mm
-----------------------------	------------

Maximum operating bending radius	64 mm
----------------------------------	-------

Maximum operating bending radius	2.52 in.
----------------------------------	----------

Maximum installation load	32 mm
---------------------------	-------

Maximum installation load	1.26 in.
---------------------------	----------

Shielding braid coverage	70 %
--------------------------	------

Materials and material properties

Cable

Material - Conductor	Cu (copper)
----------------------	-------------

Material - Conductor Insulation	Foam-Skin Polyethylen
---------------------------------	-----------------------

Material - Cable jacket	PUR
-------------------------	-----

Flame retardancy	according to IEC 60332-1-2
------------------	----------------------------

Interface 1

Material - Body interface 1	Plastics
-----------------------------	----------

Material - Contact interface 1	CuZn
--------------------------------	------

Material - Contact finish interface 1	Au (gold)
---------------------------------------	-----------

Material - Contact carriers interface 1	Plastics
---	----------



Data sheet

Page 4/7

Industry patch cord RJ45 Cat.6A PUR 10.0 m

P/N

142M2X55100

EAN 4251394602769

2026/09/04

Version: K

Technical Data

Materials and material properties

Interface 2

Material - Body interface 2	Plastics
Material - Contact interface 2	CuZn
Material - Contact finish interface 2	Au (gold)
Material - Contact carriers interface 2	Plastics
Material - Pair shield	plastic film
Material - Pair shield finish	Al (Aluminium)
Material - Main shield	Cu (copper) braid
Material - Main shield finish	Sn
Oil resistance	yes
RoHS	compliant

Environmental conditions

Temperature (min. - max.)

Temperature - Operating °C	-40 °C - 80 °C
Temperature - Operating °F	-40 °F - 176 °F
Particulate ingress interface 1	IP2X when plugged in
Liquid ingress/immersion interface 1	IPX0 when plugged in
Particulate ingress interface 2	IP2X when plugged in
Liquid ingress/immersion interface 2	IPX0 when plugged in
Pollution degree interface 1	1
Pollution degree interface 2	1

Approvals

UL listed (file no.)



DUXR.E178484



Data sheet

Page 5/7

Industry patch cord RJ45 Cat.6A PUR 10.0 m

P/N

142M2X55100

EAN 4251394602769

2026/09/04

Version: K

Technical Data

Standards/Regulations

Generic cabling systems

General requirements ISO/IEC 11801-1 | DIN EN 50173-1

Profinet yes

Connectors for electronic equipment

Free and fixed connectors IEC 60603-7-51

Multi-element metallic cables used in analogue and digital communication and control DIN EN 50288-4-2

Test for vertical flame propagation for a single insulated wire or cable IEC 60332-1-2

Measurement of smoke density of cables burning IEC 61034

Determination of the halogen acid gas content IEC 60754-1

Insulating and sheathing materials of cables and insulated wire - General test methods DIN EN 60811-2-1

Copper and copper alloys - Drawn round copper wire for the production of electrical conductors DIN EN 13602 Cu-ETP-A... | DIN EN 13602 Cu-ETP-A...-B

Classifications

ETIM 7.0 EC002599

ETIM 8.0 EC002599

ETIM 9.0 EC002599

ETIM 10.0 EC002599

Packing details

Type of packaging 1 pc(s) / plastic bag

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way.



Data sheet

Page 6/7

Industry patch cord RJ45 Cat.6A PUR 10.0 m

P/N

142M2X55100


EAN 4251394602769

2026/09/04

Version: K


Illustrations

Dimensional drawing

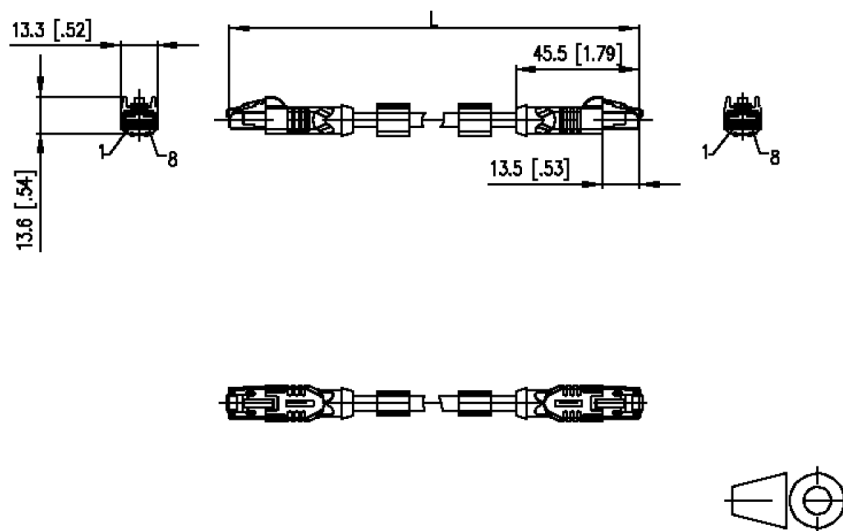


Wiring diagram


RJ45 plug



front

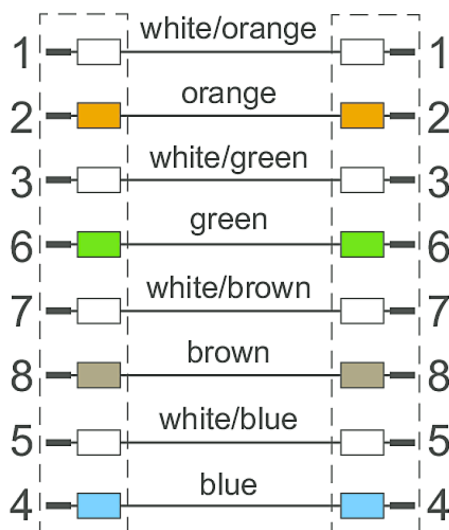

RJ45 plug



front



Data sheet

Page 7/7

Industry patch cord RJ45 Cat.6A PUR 10.0 m

P/N

142M2X55100**EAN 4251394602769**

2026/09/04

Version: K

Illustrations

Principle diagram

