
NH fuse enclosure

GTT 201

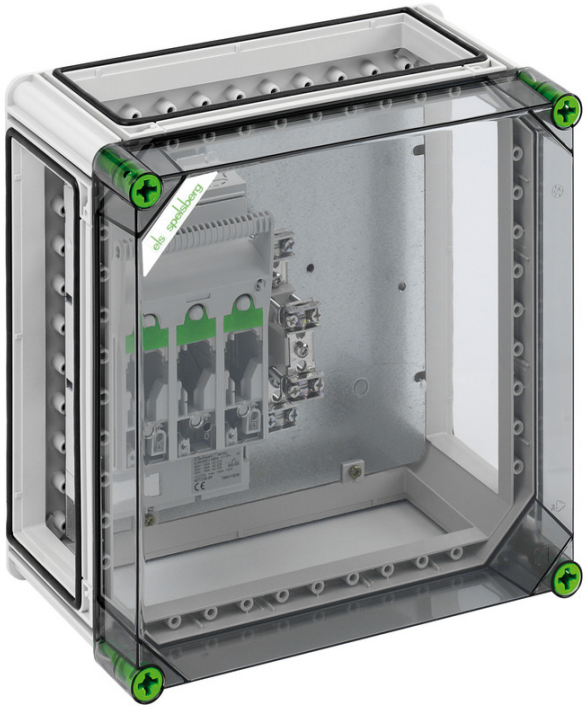

GTT 201

NH fuse enclosure

CUSTOMIZABLE

Productnumber: 02620101
Dimensions: 320 x 320 x 179 mm

NH fuse enclosure, 1 x NH 00 fuse switch disconnecter, Shell connection 1.5 - 50 mm², PE/N terminal 2 x 50 mm², assembled on mounting plate, 3 x enclosure connectors (GGV)

with transparent cover

IP65 IK08 690V AC 440V DC

Created at 04.06.2026. All statements without guarantee. We reserve the right to make improvements to technical progress.
Günther Spelsberg GmbH + Co. KG
Im Gewerbepark 1 · D-58579 Schalksmühle · Telefon: +49 (0) 23 55 / 892-0 · Telefax: +49 (0) 23 55 / 892-299

Technical Data

electrical characteristics

Rated operating voltage AC:	690 V
Rated operating voltage DC:	440 V
Rated insulation voltage AC:	690 V
Rated insulation voltage DC:	1000 V
Protection class:	II
Type of protection:	IP65
Rated current:	125 A
UL Type Rating:	3R

Dimensions

Width:	320 mm
Length:	320 mm
Height:	179 mm
Weight:	3.683 kg

Material characteristics

UV-resistant:	yes
Halogen free:	yes
Flammability class according with UL94:	V2
Glow-wire flammability:	960 °C (EN 60695-2-11)

mechanical properties

Impact strength:	IK08
Cover screw torque:	2.5 Nm
Stackable:	yes

Ambient conditions

max. relative humidity 25°C:	95 %
max. relative humidity 40°C:	50 %
Min. ambient temperature:	-25 °C

Ambient conditions

Max. ambient temperature:	40 °C
24h ambient temperature:	35 °C
Installation location:	protected outdoor areas

Sales Information

EAN:	4013902051526
ETIM Class:	EC000249
Custom tariff number:	85369095
Minimum order quantity:	1

Material

Base unit material:	Polycarbonate
Cover material:	Polycarbonate
Sealing material:	Polyurethane
Cover screw material:	Polyamide, glass-fibre reinforced

Accessories

07251201 - GFS 12-m - Flange set

07673001 - KPK NH00 - Prism terminal

07675001 - KSR NH 00 - Terminal screws