Terminal block enclosure

RK 4/18 K-L



RK 4/18 K-L

Terminal block enclosure

CUSTOMIZABLE

Productnumber: 61591201
Dimensions: 180 x 110 x 90 mm

Terminal block enclosure, protection class IP54/IP66, nominal cross-section 4 mm², Ui=400V AC, Polystyrene, internal fixing points, for standard indoor installations

without terminals, with mounting rail NS35

Accessories supplied:
8 Attachment bushes IP54 M20 sealing range 8 - 13,5 mm, 2 Attachment bushes IP54 M25 sealing range 9 - 18,5 mm, 1 Attachment bushes IP54 M32 sealing range 13 - 23 mm

IP54 IP66 | 4² | IK07 | 400V AC | halogen-free

To industrial product: 63591201

Technical Data

electrical characteristics

Rated insulation voltage AC:	400 V
Max. conductor cross section:	4 mm²
Protection class:	II
Type of protection:	IP54/IP66
UL Type Rating:	not specified

Dimensions

Width:	180 mm
Length:	110 mm
Height:	90 mm
Weight:	0.3976 kg

Material characteristics

UV-resistant:	no
Halogen free:	yes
Flammability class according with UL94:	HB
Glow-wire flammability:	650 °C (EN 60695-2-11)

mechanical properties

Type of fastening:	Wall/ceiling mounting
Impact strength:	IK07
Sealable:	yes
Fastening:	internal fixing points

Ambient conditions

max. relative humidity 25°C:	95 %
max. relative humidity 40°C:	50 %
Min. ambient temperature:	-25 °C
Max. ambient temperature:	40 °C
24h ambient temperature:	35 °C

Ambient conditions

Installation location:	Indoors

Sales Information

EAN:	4013902090174
ETIM Class:	EC002713
Custom tariff number:	85389099
Minimum order quantity:	1

Material

Base unit material:	Polystyrene
Cover material:	Polystyrene
Sealing material:	Polyurethane
Cover screw material:	Polyamide, glass-fibre reinforced

Accessories

19000101 - HBA - Mounting material

19000501 - ASS-gro - External hinge set

19010001 - VSG - Padlock kit

19202001 - KS M20 - Combi set

19202501 - KS M25 - Combi set

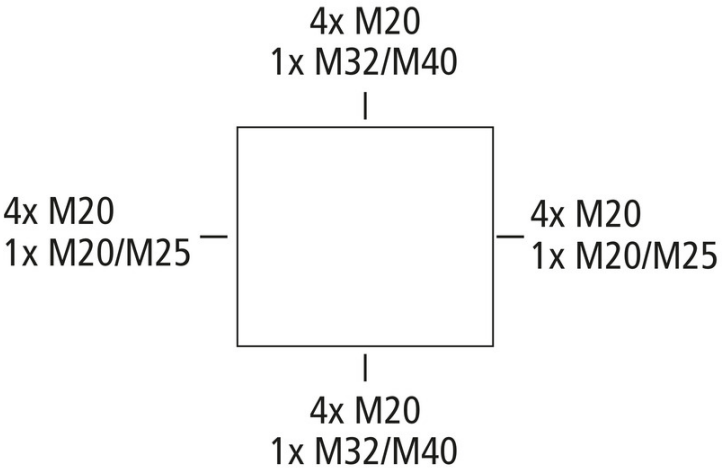
19202601 - KS M25-gro - Combi set

19203201 - KS M32 - Combi set

19400101 - TK ABL - External fixing lugs kit

89602901 - KTB 1-100 - Cable tray fastening

Cable gland


4x M20
1x M32/M40
4x M20
1x M20/M25
4x M20
1x M20/M25
4x M20
1x M32/M40