Meter housing

AKi-Z 410



AKi-Z 410

Meter housing

Productnumber: 75241001
Dimensions: 300 x 600 x 210 mm

Meter enclosure, with transparent cover, standard version sealable, with meter cross fitted for triphase counter and meter fixing screws, standard version sealable consumer space at the top, with 35 mm standard rails, With double membrane seals, sealing and insulating plugs

Technical Data

electrical characteristics

Rated operating voltage AC:	400 V
Rated insulation voltage AC:	400 V
Protection class:	II
Type of protection:	IP65
UL Type Rating:	not specified

Dimensions

Width:	300 mm
Length:	600 mm
Height:	210 mm
Weight:	3.899 kg

Material characteristics

UV-resistant:	yes
Halogen free:	yes
Flammability class according with UL94:	V2
Glow-wire flammability:	850 °C (EN 60695-2-11)

mechanical properties

Type of fastening:	Surface mounting
Impact strength:	IK08

Ambient conditions

max. relative humidity 25°C:	95 %
max. relative humidity 40°C:	50 %
Min. ambient temperature:	-25 °C
Max. ambient temperature:	40 °C
24h ambient temperature:	35 °C
Installation location:	protected outdoor areas

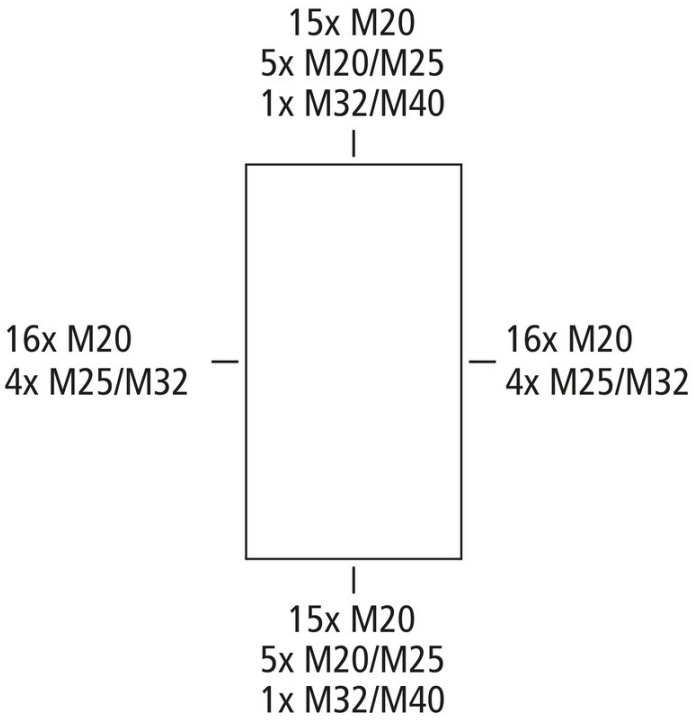
Sales Information

EAN:	4013902409594
ETIM Class:	EC000248
Custom tariff number:	85389099
Minimum order quantity:	1

Material

Base unit material:	Polycarbonate
Sealing material:	Polyurethane
Cover screw material:	Polyamide, glass-fibre reinforced

Cable gland


15x M20
5x M20/M25
1x M32/M40
16x M20
4x M25/M32
16x M20
4x M25/M32
15x M20
5x M20/M25
1x M32/M40