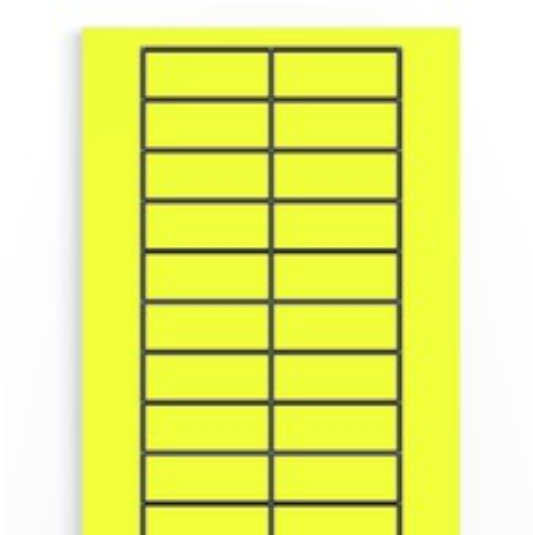


**PAGETAB 56/22****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

Similar to illustration



PageTab are woven-fabric labels in sheet form. Except for the 8 x 20 version, all labels have a black border.

**General ordering data**

|            |                                                    |
|------------|----------------------------------------------------|
| Version    | Device markers, Device markers, 22 x 56 mm, yellow |
| Order No.  | <a href="#">1686210000</a>                         |
| Type       | PAGETAB 56/22                                      |
| GTIN (EAN) | 4008190492649                                      |
| Qty.       | 25 pc(s).                                          |

## PAGETAB 56/22

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

### Dimensions and weights

|            |         |                 |            |
|------------|---------|-----------------|------------|
| Depth      | 0.08 mm | Depth (inches)  | 0.003 inch |
| Height     | 22 mm   | Height (inches) | 0.866 inch |
| Width      | 56 mm   | Width (inches)  | 2.205 inch |
| Net weight | 11.24 g |                 |            |

### Temperatures

|                             |             |
|-----------------------------|-------------|
| Operating temperature range | -29...93 °C |
|-----------------------------|-------------|

### General data

|                                              |                                           |             |  |
|----------------------------------------------|-------------------------------------------|-------------|--|
| Adhesive                                     | Permanent acrylic copolymer               |             |  |
| Colour                                       | yellow                                    |             |  |
| Material                                     | Acrylic-coated fibre webbing              |             |  |
| Material colour according to resistance code | 4                                         |             |  |
| Number of markers per combination            | 1 Label sheet = 24 Device markers         |             |  |
| Number of markers per packaging unit         | Number of combinations per packaging unit | 25          |  |
|                                              | Form of supply                            | Label sheet |  |
|                                              | Number of markers per combination         | 24          |  |
| Number of markers per packaging unit         | 600                                       |             |  |
| Number per sheet                             | 24                                        |             |  |
| Operating temperature range                  | -29...93 °C                               |             |  |
| Operating temperature range, max.            | 93 °C                                     |             |  |
| Operating temperature range, min.            | -29 °C                                    |             |  |
| Printing                                     | Neutral                                   |             |  |
| Version                                      | Self-adhesive                             |             |  |
| Width                                        | 56 mm                                     |             |  |

### Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001288    | ETIM 7.0    | EC001288    |
| ETIM 8.0    | EC001288    | ETIM 9.0    | EC001288    |
| ETIM 10.0   | EC001288    | ECLASS 9.0  | 27-40-06-29 |
| ECLASS 9.1  | 27-40-06-29 | ECLASS 10.0 | 27-40-06-29 |
| ECLASS 11.0 | 27-28-11-04 | ECLASS 12.0 | 27-28-11-04 |
| ECLASS 13.0 | 27-28-11-04 | ECLASS 14.0 | 27-28-11-04 |
| ECLASS 15.0 | 27-28-11-04 |             |             |

### Environmental Product Compliance

|                        |                             |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC             | No SVHC above 0.1 wt%       |

### Approvals

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

### Downloads

|            |                                          |
|------------|------------------------------------------|
| Catalogues | <a href="#">Catalogues in PDF-format</a> |
|------------|------------------------------------------|

