


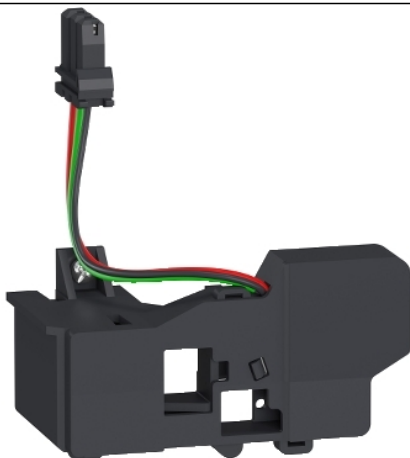

Hoofd

Range	Masterpact
Device short name	SDE
Product or component type	Hulpcontact
Device application	Controle
Bereik compatibiliteit	Masterpact Masterpact MTZ2 automaat Masterpact Masterpact MTZ3 automaat

Complementair

Type hulpcontacten	Standaard
Samenstelling signaleringscontacten	1 NO/NC
Mounting mode	Vast
Ith conventionele thermische stroom in vrije lucht	5 A
Uitschakelvermogen	6 A AC-12 240/380 V AC 50/60 Hz 2 A AC-12 480 V AC 50/60 Hz 3 A DC-12 24/48 V DC 0,3 A DC-12 125 V DC 0,15 A DC-12 250 V DC
Minimale belasting	100 mA bij 24 V

Verpakkingseenheid

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3,5 cm
Package 1 Width	4,0 cm
Package 1 Length	7,3 cm
Package 1 Weight	64,0 g

Duurzaamheid van het aanbod

REACH-regelgeving	REACH-verklaring
REACH vrij van SVHC	Ja
EU-richtlijn RoHS	Voldoet aan vrijstellingen
Kwkvrij	Ja
RoHS-regulering China	RoHS-verklaring China
Informatie over RoHS-vrijstelling	Ja