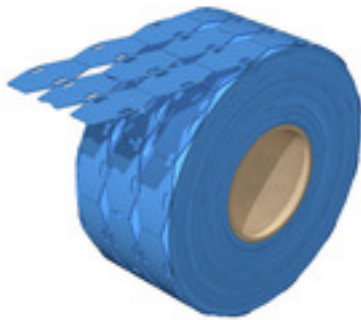


**SFX-DT 9/24 MM BL****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

We support our customers in the food industry with detectable marking solutions to ensure the high standards required within the framework of the HACCP concept. Thanks to a metallic filler, our detectable MultiMark markers can be reliably identified by metal and X-ray detectors. This minimises the risk of product contamination in the production process. Maximum safety is ensured with important product properties, such as corrosion resistance or higher ageing resistance to UV radiation in indoor areas and heat. These properties are regularly tested and confirmed in our own accredited laboratory. Not suitable for direct food contact.

- Detectable by metal and X-ray detectors
- Visually recognisable by blue colour
- Corrosion resistant metallic filler
- Clear and resistant print image
- Available in different versions for a wide variety of marking requirements

**Highly flexible: SFX**

SFX markers are the preferred choice for labelling cables if you prefer the classic cable tie solution. Cables do not always run in a straight line. The material used in SFX markers addresses this fact with highly flexible polyurethane. The marker follows each curve of the cable and latches on with ease.

**General ordering data**

|                    |                                                              |
|--------------------|--------------------------------------------------------------|
| Version            | SlimFix, Conductor and cable markers, 7 - , 26 x 15 mm, blue |
| Order No.          | <a href="#">2621490000</a>                                   |
| Type               | SFX-DT 9/24 MM BL                                            |
| GTIN (EAN)         | 4050118625554                                                |
| Qty.               | 1,000 pc(s).                                                 |
| compatible printer | <a href="#">2599430000</a> <a href="#">2599440000</a>        |

## SFX-DT 9/24 MM BL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|            |       |                 |            |
|------------|-------|-----------------|------------|
| Height     | 26 mm | Height (inches) | 1.024 inch |
| Width      | 15 mm | Width (inches)  | 0.591 inch |
| Net weight | 0.2 g |                 |            |

## Temperatures

|                                  |             |                                  |     |
|----------------------------------|-------------|----------------------------------|-----|
| Operating temperature range      | -30...65 °C | Continuous operating temp., min. | -30 |
| Continuous operating temp., max. | 65          |                                  |     |

## General data

|                                   |              |                                   |             |
|-----------------------------------|--------------|-----------------------------------|-------------|
| Colour                            | blue         | Halogen                           | No          |
| Material                          | Polyethylene | Operating temperature range       | -30...65 °C |
| Operating temperature range, max. | 65 °C        | Operating temperature range, min. | -30 °C      |
| Size of labelling field           | 23.5 x 9 mm  | UL 94 flammability rating         | HB          |
| Version                           | halogen-free | Width                             | 15 mm       |

## Conductor and cable markers

|                      |         |                |     |
|----------------------|---------|----------------|-----|
| Cable tie passage    | Flat    | Conductor O.D. | 7 - |
| Conductor O.D., min. | 7 mm    | Halogen        | No  |
| Suitable cable tie   | Plastic |                |     |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001530    | ETIM 7.0    | EC001530    |
| ETIM 8.0    | EC001530    | ETIM 9.0    | EC001530    |
| ETIM 10.0   | EC001530    | ECLASS 9.0  | 27-40-04-01 |
| ECLASS 9.1  | 27-40-04-01 | ECLASS 10.0 | 27-40-04-01 |
| ECLASS 11.0 | 27-28-11-02 | ECLASS 12.0 | 27-28-11-02 |
| ECLASS 13.0 | 27-28-11-02 | ECLASS 14.0 | 27-28-11-02 |
| ECLASS 15.0 | 27-28-11-02 |             |             |

## Environmental Product Compliance

|                        |                             |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC             | No SVHC above 0.1 wt%       |

## Approvals

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

## Downloads

|                  |                                          |
|------------------|------------------------------------------|
| Engineering Data | <a href="#">CAD data – STEP</a>          |
| Catalogues       | <a href="#">Catalogues in PDF-format</a> |

### SFX-DT 9/24 MM BL

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Drawings



**SFX-DT 9/24 MM BL****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold


Germany

[www.weidmueller.com](http://www.weidmueller.com)**Accessories****Ink ribbons**

These printers produce excellent printing results thanks to the thermal transfer technique. Different materials and the user-friendly printing system under Windows optimise marking efforts.

**General ordering data**

|            |                            |            |
|------------|----------------------------|------------|
| Type       | RIBBON MM-HS 60/300 SW     | Version    |
| Order No.  | <a href="#">2448880000</a> | Ink ribbon |
| GTIN (EAN) | 4050118462944              |            |
| Qty.       | 1 pc(s).                   |            |

**THM MULTIMARK**

These printers produce excellent printing results thanks to the thermal transfer technique. Different materials and the user-friendly printing system under Windows optimise marking efforts.

**General ordering data**

|            |                            |
|------------|----------------------------|
| Type       | MULTIMARK ROLLER 115       |
| Order No.  | <a href="#">1357420000</a> |
| GTIN (EAN) | 4050118160314              |
| Qty.       | 1 pc(s).                   |

### SFX-DT 9/24 MM BL

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26


D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Accessories

### THM MULTIMARK PLUS



These printers produce excellent printing results thanks to the thermal transfer technique. Different materials and the user-friendly printing system under Windows optimise marking efforts.

### General ordering data

|            |                             |
|------------|-----------------------------|
| Type       | MULTIMARK PLUS ROLLER 1 ... |
| Order No.  | <a href="#">2672590000</a>  |
| GTIN (EAN) | 4050118708097               |
| Qty.       | 1 pc(s).                    |