Meter housing

ZKi 1



ZKi 1

Meter housing

CUSTOMIZABLE

Productnumber: 74900101
Dimensions: 250 x 370 x 193 mm

Meter enclosure, with transparent cover, standard version sealable, with mounted meter cross and meter fixing screws, with double membrane seals, sealing and insulating plugs

for tri-phase counter

IP54 IP65 | IK08 | 400V AC

Technical Data

electrical characteristics

Rated operating voltage AC:	400 V
Protection class:	II
Type of protection:	IP54/IP65
UL Type Rating:	not specified

Dimensions

Width:	250 mm
Length:	370 mm
Height:	193 mm
Weight:	2.048 kg

Material characteristics

UV-resistant:	yes
Halogen free:	yes
Flammability class according with UL94:	V2
Glow-wire flammability:	850 °C (EN 60695-2-11)

mechanical properties

Type of fastening:	Surface mounting
Impact strength:	IK08

Ambient conditions

max. relative humidity 25°C:	95 %
max. relative humidity 40°C:	50 %
Min. ambient temperature:	-35 °C
Max. ambient temperature:	80 °C
24h ambient temperature:	60 °C
Installation location:	protected outdoor areas

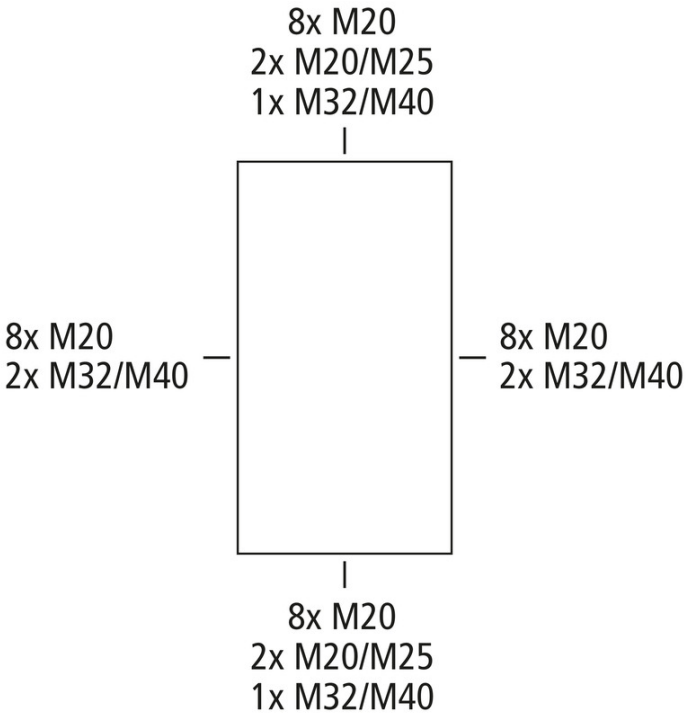
Sales Information

EAN:	4013902941292
ETIM Class:	EC000248
Custom tariff number:	85389099
Minimum order quantity:	1

Material

Base unit material:	Polycarbonate
Cover material:	Polycarbonate
Sealing material:	Polyurethane
Cover screw material:	Polyamide, glass-fibre reinforced
Hinged window material:	Polycarbonate

Cable gland


8x M20
2x M20/M25
1x M32/M40
8x M20
2x M32/M40
8x M20
2x M32/M40
8x M20
2x M20/M25
1x M32/M40