

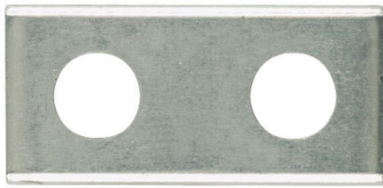
**WQL 2 WF5****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Product image**

The distribution or multiplication of a potential to adjoining terminal blocks is realized via a cross-connection. Additional wiring effort can be easily avoided. Even if the poles are broken out, contact reliability in the terminal blocks is still ensured. Our portfolio offers pluggable and screwable cross-connection systems for modular terminal blocks.

**General ordering data**

|            |  |
|------------|--|
| Version    | Bolt-type screw terminals, Cross-connector, Number of poles: 2 |
| Order No.  | <a href="#">1812710000</a>                                     |
| Type       | WQL 2 WF5  |
| GTIN (EAN) | 4032248404568  |
| Qty.       | 5 items  |

## WQL 2 WF5

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Technical data

### Approvals

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

### Dimensions and weights

|            |        |                 |             |
|------------|--------|-----------------|-------------|
| Depth      | 4 mm   | Depth (inches)  | 0.1575 inch |
| Height     | 25 mm  | Height (inches) | 0.9842 inch |
| Width      | 12 mm  | Width (inches)  | 0.4724 inch |
| Net weight | 8.61 g |                 |             |

### Temperatures

|                     |                |                     |               |
|---------------------|----------------|---------------------|---------------|
| Storage temperature | -25 °C...55 °C | Ambient temperature | -5 °C...40 °C |
|---------------------|----------------|---------------------|---------------|

### Environmental Product Compliance

|                        |                             |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC             | No SVHC above 0.1 wt%       |

### Material data

|                |               |        |      |
|----------------|---------------|--------|------|
| Basic material | Copper - zinc | Colour | grey |
|----------------|---------------|--------|------|

### Additional technical data

|                |                 |                          |    |
|----------------|-----------------|--------------------------|----|
| Type of fixing | when screwed in | Explosion-tested version | No |
|----------------|-----------------|--------------------------|----|

### Dimensions

|                 |          |
|-----------------|----------|
| Pitch in mm (P) | 15.60 mm |
|-----------------|----------|

### General

|                 |   |
|-----------------|---|
| Number of poles | 2 |
|-----------------|---|

### Rating data

|                 |      |
|-----------------|------|
| Nominal current | 76 A |
|-----------------|------|

### Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 8.0    | EC000489    | ETIM 9.0    | EC000489    |
| ETIM 10.0   | EC000489    | ECLASS 14.0 | 27-25-03-03 |
| ECLASS 15.0 | 27-25-03-03 |             |             |