

# Data sheet

## OpDAT REGpro front cover 12xE2000-S APC OS2

Page 1/5

P/N


15024A5912-E

EAN 4250184130413


2026/08/31

Version: AI

### Illustrations

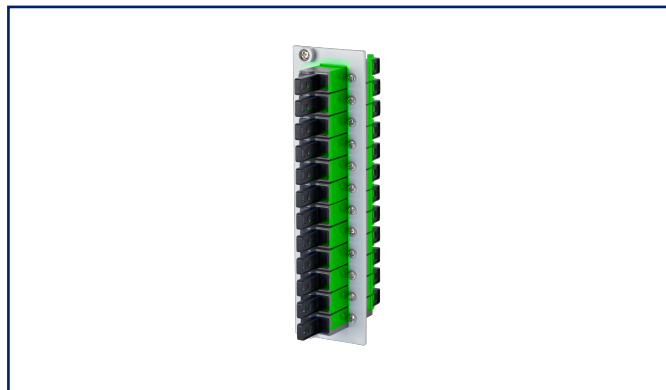

Dimensional drawing

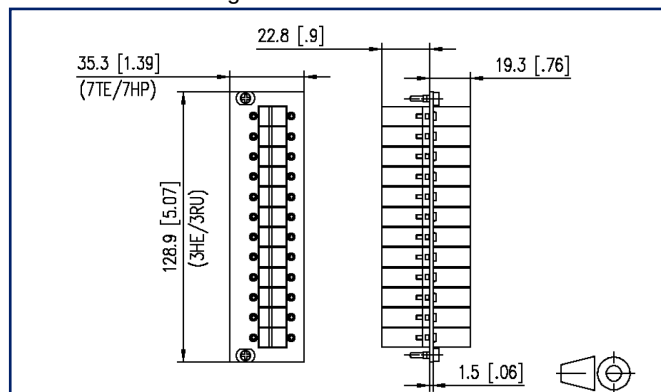

See enlarged drawings at the end of document

### Product specification

- front plate 3RU/7HP with 12 E2000 adapters
- slotted ceramics sleeve for single mode applications
- suitable for mounting in OpDAT REG pro and OpDAT REG S
- gray, powder-coated steel sheet
- variants: equipped with 12 E2000 adapters, each in blue (OS2) or E2000 APC adapters, each in green (OS2)



## Data sheet

Page 2/5

# OpDAT REGpro front cover 12xE2000-S APC OS2

P/N

15024A5912-E

EAN 4250184130413

2026/08/31

Version: AI

## Technical Data

### General Data

|                                               |                                                            |
|-----------------------------------------------|------------------------------------------------------------|
| Fields of application                         | structured building cabling<br>office areas<br>data center |
| Mechanical measurement according to MICE      | M1                                                         |
| Ingress measurement according to MICE         | I1                                                         |
| Climatic measurement according to MICE        | C1                                                         |
| Electromagnetic measurement according to MICE | E3                                                         |
| Design                                        | front plate                                                |
| Mounting style                                | 3RU/7HP                                                    |
| Transmission technology                       | Fiber optic                                                |
| Color                                         | green                                                      |
| Dimensions                                    |                                                            |
| Dimension (L x W x H)                         | 43.6 mm x 128.9 mm x 35.3 mm                               |
| Dimension (L x W x H)                         | 1.717 in. x 5.075 in. x 1.39 in.                           |
| Height unit                                   | 3RU                                                        |
| Horizontal pitch                              | 7HP                                                        |
| Fiber class                                   | OS2                                                        |
| Mode type of the fiber                        | Singlemode                                                 |

### Connections/interfaces

|                                                  |                  |
|--------------------------------------------------|------------------|
| Connector technology interface 1                 | E2000-S Couplers |
| Connector technology interface 2                 | E2000-S Couplers |
| Number of ports interface 1                      | 12               |
| Number of ports interface 2                      | 12               |
| Number of equipped ports interface 1             | 12               |
| Number of ports interface 2 equipped             | 12               |
| Number of ports with dust protection interface 1 | 12               |
| Number of ports with dust protection interface 2 | 12               |

### Mechanical data

|                                |                 |
|--------------------------------|-----------------|
| Cut-out                        | SC, LC-D, E2000 |
| Connector type                 | simplex         |
| Life - Number of mating cycles | min. 1000       |



# OpDAT REGpro front cover 12xE2000-S APC OS2

P/N

15024A5912-E

EAN 4250184130413

2026/08/31

Version: AI

## Technical Data

### Materials and material properties

|                                  |                  |
|----------------------------------|------------------|
| Material - Mounting plate        | steel            |
| Material - Mounting plate finish | powder-coated    |
| Material - Sleeve                | ceramic, slotted |
| Material - Coupler housing       | Plastics         |
| Halogen free                     | yes              |
| RoHS                             | compliant        |

### Classifications

|           |          |
|-----------|----------|
| ETIM 7.0  | EC001130 |
| ETIM 8.0  | EC001130 |
| ETIM 9.0  | EC001130 |
| ETIM 10.0 | EC001130 |

### Packing details

|                   |                       |
|-------------------|-----------------------|
| Type of packaging | 1 pc(s) / plastic bag |
|-------------------|-----------------------|

### Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way.

Data sheet

Page 4/5

## OpDAT REGpro front cover 12xE2000-S APC OS2

P/N

15024A5912-E

EAN 4250184130413

2026/08/31

Version: AI

### Accessories from

| P/N           | Designation                                                   |
|---------------|---------------------------------------------------------------|
| 15024A10-24-E | OpDAT REGpro24 housing without splice tray                    |
| 15024A10-E    | OpDAT REGpro housing without splice tray                      |
| 15024A10S-E   | OpDAT REGpro housing with splice tray and crimp splice holder |
| 15024B10-E    | OpDAT REG S for pre-terminated cables                         |
| 15024B10S-E   | OpDAT REG S for crimp splice holder                           |
| 15024B10S-S   | OpDAT REG S for shrink splice holder                          |



## Illustrations

### Dimensional drawing

