
Distribution board

GSi 2 VS-KT-t

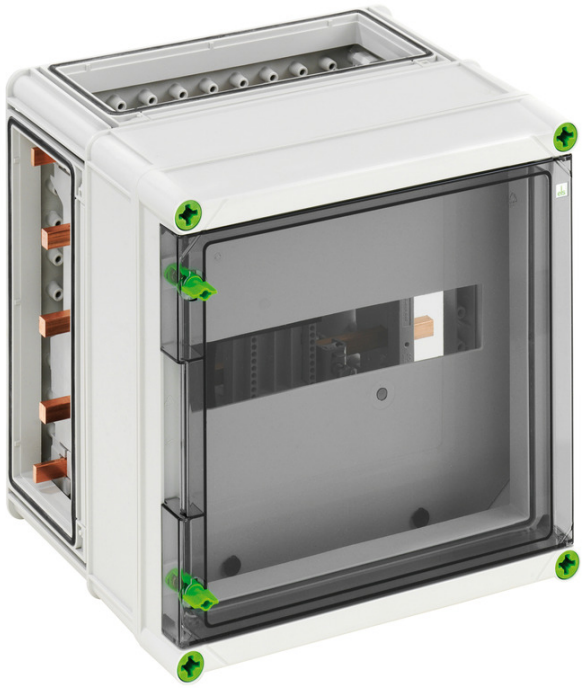

GSi 2 VS-KT-t

Distribution board

CUSTOMIZABLE

Productnumber: 02135201
Dimensions: 320 x 320 x 254 mm

Module enclosure, 14 distribution units, 1-row, standard version sealable, with busbar system, 5-pole 250A, Busbar power supply 70/35 mm² and adapter for installing a selective main switch, masking and labelling strips, 3 x enclosure connectors (GGV)

with transparent hinged door



Created at 04.06.2026. All statements without guarantee. We reserve the right to make improvements to technical progress.
Günther Spelsberg GmbH + Co. KG
Im Gewerbepark 1 · D-58579 Schalksmühle · Telefon: +49 (0) 23 55 / 892-0 · Telefax: +49 (0) 23 55 / 892-299

Technical Data

electrical characteristics

Rated insulation voltage AC:	400 V
Protection class:	II
Type of protection:	IP65
Number of modules:	14

Colours

Base unit colour:	grey
Cover colour:	transparent

Dimensions

Width:	320 mm
Length:	320 mm
Height:	254 mm
Inner height:	157 mm
Weight:	5.52 kg

Material characteristics

UV-resistant:	yes
Halogen free:	yes
Glow-wire flammability:	960 °C (EN 60695-2-11)

mechanical properties

Type of fastening:	Surface mounting
Impact strength:	IK08
Cover screw torque:	2.5 Nm
Stackable:	yes

Ambient conditions

max. relative humidity 25°C:	95 %
max. relative humidity 40°C:	50 %

Ambient conditions

Min. ambient temperature:	-25 °C
Max. ambient temperature:	40 °C
24h ambient temperature:	35 °C
Installation location:	protected outdoor areas

Sales Information

EAN:	4013902902866
ETIM Class:	EC000214
Custom tariff number:	85369095
Minimum order quantity:	1

Material

Base unit material:	Polycarbonate
Cover material:	Polycarbonate
Sealing material:	Polyurethane
Cover screw material:	Polyamide, glass-fibre reinforced

Accessories

07251201 - GFS 12-m - Flange set

07505601 - GSV 56 - Busbar connector