
Front part

FTF1

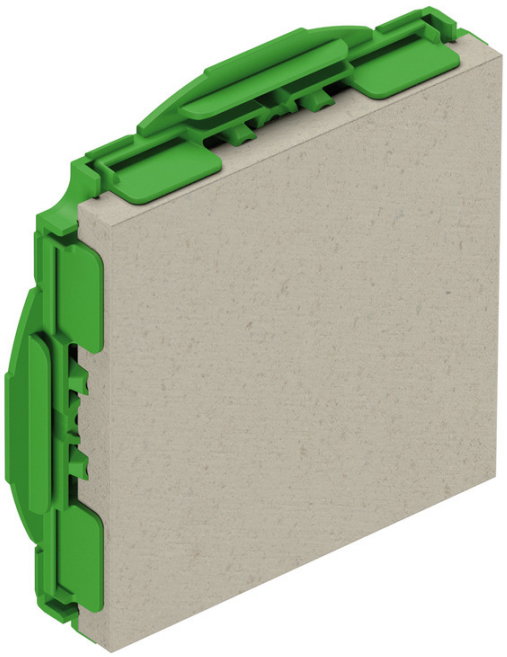

FTF1

Front part

Productnumber: 98211001
Dimensions: 145 x 145 x 27 mm

Front part, for use in combination with IBTLED 1-O installation box in site-cast concrete, protection class IP30, rated insulation voltage: 400V AC, Halogen free

with Fermacell® plasterboard variable up to max. 100 x 100 mm, adhesive fixing or nail installation

Created at 04.06.2026. All statements without guarantee. We reserve the right to make improvements to technical progress.
Günther Spelsberg GmbH + Co. KG
Im Gewerbepark 1 · D-58579 Schalksmühle · Telefon: +49 (0) 23 55 / 892-0 · Telefax: +49 (0) 23 55 / 892-299

Technical Data

electrical characteristics

Rated insulation voltage AC:	400 V
Type of protection:	IP30
Suitable for:	Concrete construction

Colours

Cover colour:	grey

Dimensions

Width:	145 mm
Length:	145 mm
Height:	27 mm
Weight:	0.29 kg

Material characteristics

Halogen free:	yes
Flammability class according with UL94:	HB
Glow-wire flammability:	650 °C (EN 60695-2-11)

mechanical properties

Type of fastening:	adhesive fixing or nail installation
Type of accessory:	Universal front piece

Sales Information

EAN:	4013902631919
ETIM Class:	EC002472
Custom tariff number:	39269097
Minimum order quantity:	1