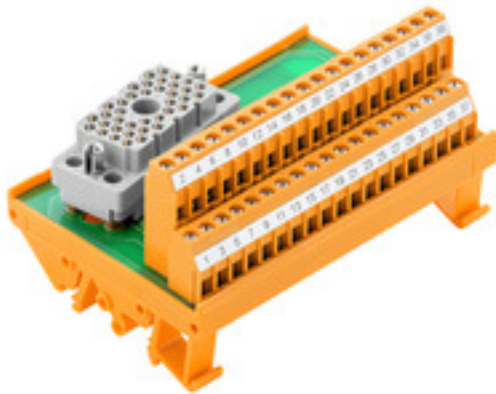


RS ELCOF 38/38LM S**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

ELCO contacts inserts are used in electrical power plants, refineries and a variety of process applications – wherever stable and reliable signal transmission is required. The ELCO connector features both a reliable connection system and a high signal capacity.

The line of RS ELCO interfaces and pre-assembled PAC ELCO cables is a specially designed solution for these requirements.

General ordering data

Version	Interface, RS ELCO, ELCO plug-in connector, 38, LP2N 5.08mm
Order No.	1480770000
Type	RS ELCOF 38/38LM S
GTIN (EAN)	4050118289527
Qty.	1 pc(s).

RS ELCOF 38/38LM S

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	60 mm	Depth (inches)	2.362 inch
Height	70 mm	Height (inches)	2.756 inch
Width	105 mm	Width (inches)	4.134 inch
Net weight	173.36 g		

Temperatures

Storage temperature	-40...60 °C	Operating temperature	-25...50 °C
---------------------	-------------	-----------------------	-------------

Rated data UL

Operating temperature UL, max.	50 °C	Operating temperature UL, min.	-25 °C
Rated current I_N	1 A	Rated voltage U_N	150 V AC / 200 V DC

Connection Data

Connection (field side)	LP2N 5.08mm	Connection on control side	ELCO plug-in connector
Contact material (control side)	Phosphor bronze alloy	Earthing	No
Number of poles (control side)	38-pole female	Polarity hardware codification	1

Rating data

Rated voltage	150 V AC / 200 V DC	Rated current per connection	1.5 A
Total operating current	57 A		

Insulation coordination (EN50178)

According to	DIN EN 50178	Rated insulation voltage	<150 V AC
Surge voltage category	II	Pollution severity level	2
Pulse voltage test (1,2/50µs)	2.5 kV	Insulation test voltage AC	0.8 kV

Connection field

Clamping range, max.	6 mm ²	Clamping range, min.	0.5 mm ²
Flexible with sleeve, max.	2.5 mm ²	Flexible with sleeve, min.	0.5 mm ²
Flexible, max. H05(07) V-K	4 mm ²	Flexible, min. H05(07) V-K	0.5 mm ²
Max. wire cross-section, AWG	AWG 26	Min. wire cross-section, AWG	AWG 12
Sleeve with plastic collar, max.	2.5 mm ²	Solid, max. H05(07) V-U	6 mm ²
Solid, min. H05(07) V-U	0.5 mm ²	Stripping length	6 mm
Tightening torque, max.	0.6 Nm	Tightening torque, min.	0.5 Nm
Type of connection	Clamping yoke connection		

Classifications

ETIM 6.0	EC002780	ETIM 7.0	EC002780
ETIM 8.0	EC002780	ETIM 9.0	EC002780
ETIM 10.0	EC002780	ECLASS 9.0	27-14-11-52
ECLASS 9.1	27-14-11-52	ECLASS 10.0	27-14-11-52
ECLASS 11.0	27-14-11-52	ECLASS 12.0	27-14-11-52
ECLASS 13.0	27-14-11-52	ECLASS 14.0	27-14-11-52
ECLASS 15.0	27-14-11-52		

RS ELCOF 38/38LM S**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Technical data****Environmental Product Compliance**

RoHS Compliance Status	Compliant with exemption
RoHS Exemption (if applicable/known)	6c
REACH SVHC	Lead 7439-92-1
SCIP	7b5ffb72-271d-4c73-8b09-bd0aeee3697a

Approvals

Approvals



Approvals MAMID	https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/
ROHS	Conform
UL File Number Search	UL Website
Certificate No. (UR)	E141197

Downloads

Approval/Certificate/Document of Conformity	Declaration of Conformity
User Documentation	Table of connections
Catalogues	Catalogues in PDF-format

RS ELCOF 38/38LM S

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

