

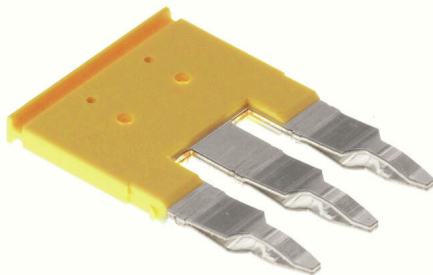
**ZQV 6/3 GE ZTL6****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Product image****Current and voltage transformer wiring**

Our test disconnect terminal blocks featuring spring and screw connection technology allow you to create all the important converter circuits for measuring current, voltage and power in a safe and sophisticated way.

**General ordering data**

Version	Z-series, Cross-connector, For the terminals, Number of poles: 3
Order No.	<a href="#">1363020000</a>
Type	ZQV 6/3 GE ZTL6
GTIN (EAN)	4050118165258
Qty.	60 items
Delivery status	This article will no longer be available in the future.
Available until	2026-06-30T00:00:00+02:00

## ZQV 6/3 GE ZTL6

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Technical data

### Approvals

ROHS	Conform
------	---------

### Dimensions and weights

Depth	33.96 mm	Depth (inches)	1.337 inch
Height	22.4 mm	Height (inches)	0.8819 inch
Width	3.1 mm	Width (inches)	0.122 inch
Net weight	4.05 g		

### Temperatures

Storage temperature	-25 °C...55 °C	Ambient temperature	-50 °C...75 °C
Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	120 °C

### Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

### Material data

Basic material	Wemid	Colour	yellow
UL 94 flammability rating	V-0		

### System specifications

Version	For the terminals
---------	-------------------

### Additional technical data

Type of fixing	Plugged	Installation advice	Direct mounting
Explosion-tested version	No		

### Dimensions

Pitch in mm (P)	8.10 mm
-----------------	---------

### General

Number of poles	3	Installation advice	Direct mounting
-----------------	---	---------------------	-----------------

### Rating data

Rated voltage	400 V	Nominal current	41 A
---------------	-------	-----------------	------

### Important note

Product information	Due to stability and temperature reasons It is only possible to break out 60% of contact elements. The usage of cross connectors reduces the rated voltage to 400 V. The voltage reduced to 25 V if cut cross connection with blank cut edges are used.
---------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

### Classifications

ETIM 8.0	EC000489	ETIM 9.0	EC000489
ETIM 10.0	EC000489	ECLASS 14.0	27-25-03-03

**Technical data**

---

ECLASS 15.0

27-25-03-03

---