NOTTURNO 1500

Part number 304917

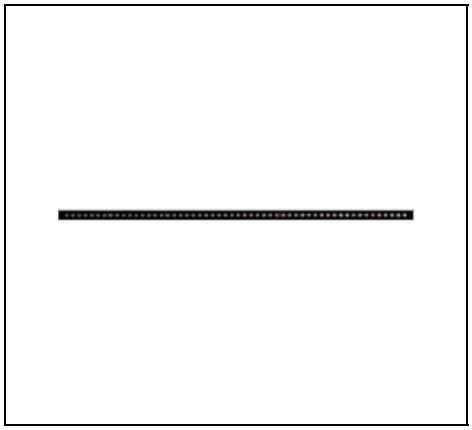

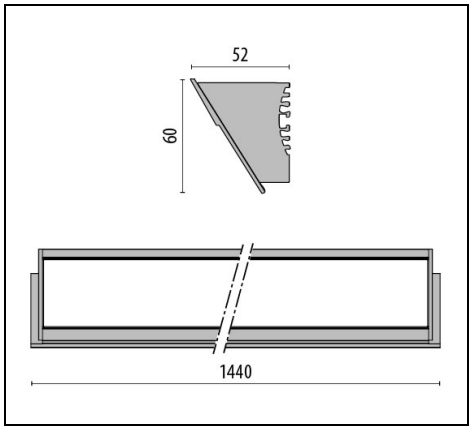

IP 66 | CLASS III | ≥ +50° | QUICK | ULR<1 | CIEn°3>95

Description

Series of linear wall LED luminaires for indoor and outdoor, comprising:

- Extruded anodised aluminium housing
- Toughened, glass diffuser, silk-screened on the inside
- Stainless steel AISI 304 end caps
- Aluminium heat sink
- For luminaire installation, please select the appropriate bracket (available as mandatory accessory)
- Static ON/OFF or dimmable DALI options available

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

Product data

ETIM Group:	EG000027	**ETIM Class:**	EC002892

General information

Lampholder:	LED	**Light source:**	LED
Lightsource lumen output [lm]:	6064	**Luminaire lumen output [lm]:**	4621
Luminaire wattage [W]:	54 W	**Luminous efficacy [lm/W]:**	86
CRI:	80	**Colour temperature [K]:**	2700
Colour / Finishing:	GR-11 / Anodised grey / Matt	**IP degree of protection:**	IP66
Impact resistance / impact energy:	IK07 2J xx5	**Protection class:**	III
Optic:	S/I - Symmetric Intensive	**Net weight [kg]:**	4.529
Overall length [mm]:	1440	**Overall width [mm]:**	52
Overall height [mm]:	60		

Mechanical features

Shape:	Rectangular	**Housing material:**	Aluminium
Diffuser material:	Glass		

Electrical features

Voltage type:	DC	**Power factor / COS Φ:**	>0.9

Installation

Application area:	Outdoor lighting	**Mounting type:**	Architectural floodlight
Min. ambient temperature [°C]:	-30	**Max. ambient temperature [°C]:**	50

Light features

MacAdam:	3	**Lumen maintenance:**	L80B10@130000h
Distribution of light emission:	Direct	**Zero light pollution (ULR = 0%):**	

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

Photometric data

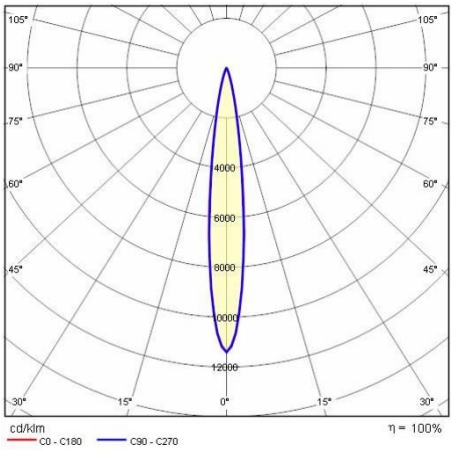

Control gear

NOTTURNO



310543

Power Supply Unit L1000/1500

Mandatory accessories

NOTTURNO

310523

Bracket NOTTURNO (nr. 2)

GR-11 / Anodised grey



310524

Bracket (nr. 2)

INOX / Stainless steel

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

310978

NOTTURNO Telescopic bracket (nr. 2)

GR-11 / Anodised grey

310981

NOTTURNO ground support bracket (nr. 2)

GR-11 / Anodised grey

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com