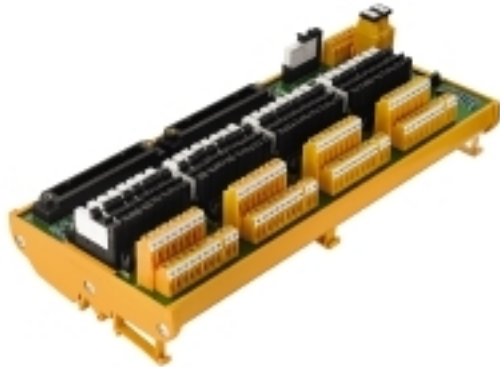


TBY-ADV551-CF-PS-2KB-S**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

The digital output interfaces via relay are used to isolate the field sensors from the card and/or to adapt the operation of the said elements to the voltage required by the DCS. The interfaces also support additional characteristics that provide many benefits such as:

- **Redundancy:** the interfaces have 2 50-pole (AKB) connectors for redundancy purposes.
- Many of the interfaces activate a relay to indicate if one of the two possible power sources has dropped below a value of approximately 12 V
- The cards can be mounted via tension clamp or screw connection.
- The input sensors can be connected in two ways: supplied with power directly from the card or directly from the field.

General ordering data

Version	Interface, RS, 2 x AKB (50P), LL2N 5.08 mm
Order No.	1379500000
Type	TBY-ADV551-CF-PS-2KB-S
GTIN (EAN)	4050118207156
Qty.	1 pc(s).
Available until	2016-05-06

TBY-ADV551-CF-PS-2KB-S
Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com
Technical data
Dimensions and weights

Depth	80 mm	Depth (inches)	3.15 inch
Height	131 mm	Height (inches)	5.157 inch
Width	303 mm	Width (inches)	11.929 inch
Net weight	927.337 g		

Temperatures

Storage temperature	-40...85 °C	Operating temperature	-25...70 °C
---------------------	-------------	-----------------------	-------------

General data

LED status display per relay	green	Disconnecter per relay	No
Fuse per relay	No	Switch	No
LED status of the supply voltage	green	Power supply fuse	1 A

Connection data

Connection (field side)	LL2N 5.08 mm	Connection on control side	2 x AKB (50P)
Connection supply	LP 5.08mm	Number of poles (control side)	50-pole plug

Rating data

Mechanical service life	5 x 10 ⁶ switching cycles
-------------------------	--------------------------------------

Ratings data input

Input voltage	24 V DC ± 10%	Input current	13 mA
---------------	---------------	---------------	-------

Ratings data output

Relay type	RSS	Contact material	AgNi 90/10
Rated voltage	250 V AC	Max. AC continuous current	2.5 A
Minimum contact current	0.1 A	Minimum contact voltage	5 V

Insulation coordinates (EN50178)

Rated insulation voltage	≤ 50 V DC	Rated input insulation voltage	≤ 50 V DC
Rated output insulation voltage	250 V AC	Overvoltage category input/input	II
Overvoltage category input/output	III	Overvoltage category output/output	II
Pollution severity level	2	Pulse voltage test (1,2/50µs)	6 kV
Insulation test voltage AC	1.2 kV	Clearance input/output	≥ 5.5 mm
Clearance input/input	≥ 5.5 mm		

Connection field

Clamping range, max.	6 mm ²	Clamping range, min.	0.13 mm ²
Flexible with sleeve, max.	2.5 mm ²	Flexible with sleeve, min.	0.5 mm ²
Flexible, max. H05(07) V-K	4 mm ²	Flexible, min. H05(07) V-K	0.5 mm ²
Max. wire cross-section, AWG	AWG 12	Min. wire cross-section, AWG	AWG 26
Sleeve with plastic collar, max.	2.5 mm ²	Solid, max. H05(07) V-U	6 mm ²
Solid, min. H05(07) V-U	0.5 mm ²	Stripping length	6 mm
Tightening torque, max.	0.6 Nm	Tightening torque, min.	0.5 Nm
Type of connection	Screw connection		

TBY-ADV551-CF-PS-2KB-S
Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com
Technical data
Supply connection

Type of connection	Screw connection	Clamping range, min.	0.13 mm ²
Clamping range, max.	6 mm ²	Solid, min. H05(07) V-U	0.5 mm ²
Solid, max. H05(07) V-U	6 mm ²	Flexible, min. H05(07) V-K	0.5 mm ²
Flexible, max. H05(07) V-K	4 mm ²	Flexible with sleeve, max.	2.5 mm ²
Flexible with sleeve, min.	2.5 mm ²	Ferrule with plastic collar, max.	0.5 mm ²
Wire cross-section, min. AWG	AWG 12	Wire cross-section, max. AWG	AWG 26
Tightening torque, min.	0.5 Nm	Tightening torque, max.	0.6 Nm
Stripping length	6 mm		

Classifications

ETIM 6.0	EC002780	ETIM 7.0	EC002780
ETIM 8.0	EC002780	ETIM 9.0	EC002780
ETIM 10.0	EC002780	ECLASS 9.0	27-14-11-52
ECLASS 9.1	27-24-22-16	ECLASS 10.0	27-14-11-52
ECLASS 11.0	27-14-11-52	ECLASS 12.0	27-14-11-52
ECLASS 13.0	27-14-11-52	ECLASS 14.0	27-14-11-52
ECLASS 15.0	27-14-11-52		

Environmental Product Compliance

RoHS Compliance Status	Compliant with exemption
RoHS Exemption (if applicable/known)	6c, 7a, 7cl
REACH SVHC	Lead 7439-92-1
SCIP	4c2bf777-1c3a-4574-9dcf-a43fbd923cdb

Approvals

Approvals



Approvals MAMID	https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/
ROHS	Conform

Downloads

Approval/Certificate/Document of Conformity	Declaration of Conformity
Product Change Notification	20210722 Technical change to TBY-ADV551-CF-PS-2KB-S 20220523 Technical change to TBY interfaces
Catalogues	Catalogues in PDF-format
Brochures	

TBY-ADV551-CF-PS-2KB-S

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

