


VL 2 SAK6/10/SAKB**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

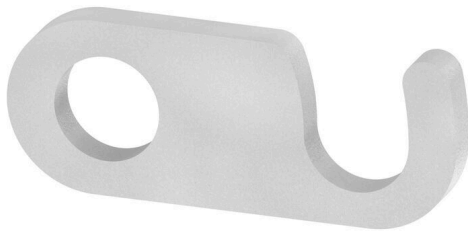

The distribution or multiplication of a potential to adjoining terminal blocks is realized via a cross-connection. Additional wiring effort can be easily avoided. Even if the poles are broken out, contact reliability in the terminal blocks is still ensured. Our portfolio offers pluggable and screwable cross-connection systems for modular terminal blocks.

General ordering data

Version	Cross-connector (terminal), when screwed in, grey, 32 A, Number of poles: 2, Pitch in mm (P): 6.50, Insulated: No, Width: 1.5 mm
Order No.	0135900000
Type	VL 2 SAK6/10/SAKB
GTIN (EAN)	4008 190036409
Qty.	50 items
Delivery status	This article will no longer be available in the future.
Available until	2026-06-30T00:00:00+02:00

VL 2 SAK6/10/SAKB

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Approvals

ROHS Conform

Dimensions and weights

Width 1.5 mm Width (inches) 0.0591 inch
 Net weight 1.02 g

Temperatures

Storage temperature -25 °C...55 °C Ambient temperature -5 °C...40 °C

Environmental Product Compliance

RoHS Compliance Status Compliant without exemption
 REACH SVHC No SVHC above 0.1 wt%

Material data

Basic material Cu Zn Colour grey

System specifications

Version for cross-connection link

Additional technical data

Type of fixing when screwed in Installation advice Direct mounting
 Explosion-tested version No

Dimensions

Pitch in mm (P) 6.50 mm

General

Number of poles 2 Installation advice Direct mounting

Rating data

Rated voltage 400 V Nominal current 32 A

Classifications

ETIM 8.0 EC000489 ETIM 9.0 EC000489
 ETIM 10.0 EC000489 ECLASS 14.0 27-25-03-03
 ECLASS 15.0 27-25-03-03