Socket outlet combination

STV 1222-S



STV 1222-S

Socket outlet combination

CUSTOMIZABLE

Productnumber: 73132201
Dimensions: 250 x 400 x 122 mm

Socket outlet combination, protection class IP44, suitable for installation by the customer of rail mounted devices, with integrated sockets pre-wired to PE/N terminal, high mechanical load capacity, temperature-insensitive, combinable, halogen-free
Cable insertions:
Top: Pre-embossing 2 x M20, 2 x M20/25, 3 x M32/40
Bottom: Pre-embossing 2 x M20, 2 x M20/25, 3 x M32/40
Left: Pre-embossing 4 x M20
Right: Pre-embossing 4 x M20

available modules: 12
equipped with:
- **2 x SCHUKO® plug socket (on front), 230V**
- **1 x CEE plug socket outlet (on front) 16A, 400V**
- **1 x CEE plug socket outlet (on front) 32A, 400V**

Accessories supplied:
Attachment bushes: 2x M25, 2x M32, sealing plugs, masking and labelling strips

Created at 04.06.2026. All statements without guarantee. We reserve the right to make improvements to technical progress.
Günther Spelsberg GmbH + Co. KG
Im Gewerbepark 1 · D-58579 Schalksmühle · Telefon: +49 (0) 23 55 / 892-0 · Telefax: +49 (0) 23 55 / 892-299

Technical Data

Built-in devices

SCHUKO® plug socket (on front), 230V:	2
CEE plug socket outlet (on front) 16A, 400V:	1
CEE plug socket outlet (on front) 32A, 400V:	1

electrical characteristics

Rated insulation voltage AC:	400 V
Protection class:	II
Type of protection:	IP44
Number of N-potentials:	1
Number of rows:	1
Number of modules:	12
Number of modules per row:	12
with N terminal:	yes
with PE terminal:	yes

Colours

Base unit colour:	grey
Cover colour:	grey

Dimensions

Width:	250 mm
Length:	400 mm
Height:	122 mm
Weight:	2.675 kg

Material characteristics

UV-resistant:	yes
Halogen free:	yes
Flammability class according with UL94:	V2

Material characteristics

Glow-wire flammability:	850 °C (EN 60695-2-11)

mechanical properties

Type of fastening:	Wall mounting
Impact strength:	IK08

Ambient conditions

max. relative humidity 25°C:	95 %
max. relative humidity 40°C:	50 %
Min. ambient temperature:	-25 °C
Max. ambient temperature:	40 °C
24h ambient temperature:	35 °C
Installation location:	protected outdoor areas

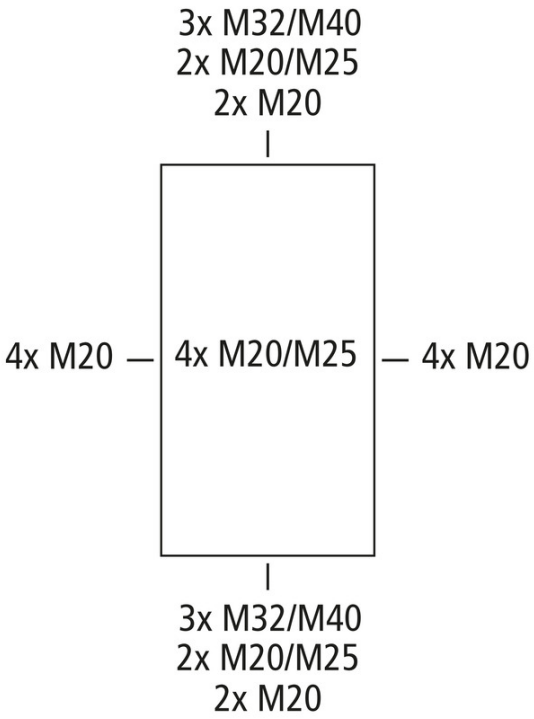
Sales Information

EAN:	4013902934744
ETIM Class:	EC000379
Custom tariff number:	85369095
Minimum order quantity:	1

Material

Base unit material:	Polycarbonate, glass-fibre reinforced
Cover material:	Polycarbonate, glass-fibre reinforced
Sealing material:	Polyurethane
Cover screw material:	Polyamide, glass-fibre reinforced
Hinged window material:	Polycarbonate

Cable gland


3x M32/M40
2x M20/M25
2x M20
4x M20
4x M20/M25
4x M20
3x M32/M40
2x M20/M25
2x M20