


**BVZ 7.62HP/03/180SF SN BK BX****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

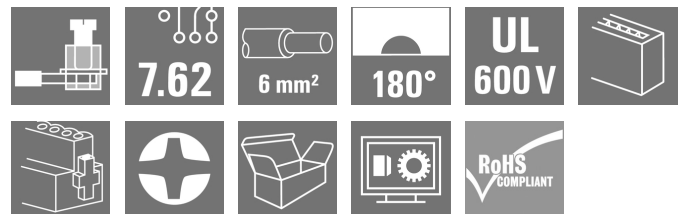**Product image**

High-performance female header with the proven, 100% maintenance-free Weidmüller steel clamping yoke. Side-by-side mounting without sacrificing any poles or with patented multifunction flange for secure, fast fixing without tools. Maximum operating reliability thanks to a mating profile that prevents incorrect connection, unique coding diversity, protection against faulty wiring, 4-point contact. Suitable for labelling.

**General ordering data**

|              |                                                                                                                                    |
|--------------|------------------------------------------------------------------------------------------------------------------------------------|
| Version      | PCB plug-in connector, female plug, 7.62 mm, Number of poles: 3, 180°, Clamping yoke connection, Clamping range, max.: 10 mm², Box |
| Order No.    | <a href="#">1930170000</a>                                                                                                         |
| Type         | BVZ 7.62HP/03/180SF SN BK BX                                                                                                       |
| GTIN (EAN)   | 4032248580040                                                                                                                      |
| Qty.         | 100 pc(s).                                                                                                                         |
| Product data | IEC: 1000 V / 57 A / 0.2 - 10 mm²<br>UL: 600 V / 40.5 A / AWG 24 - AWG 8                                                           |
| Packaging    | Box                                                                                                                                |

Creation date May 11, 2025 8:15:40 PM CEST

Catalogue status 26.04.2025 / We reserve the right to make technical changes.

**BVZ 7.62HP/03/180SF SN BK BX****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

|            |         |                 |            |
|------------|---------|-----------------|------------|
| Depth      | 42.1 mm | Depth (inches)  | 1.657 inch |
| Height     | 23.1 mm | Height (inches) | 0.909 inch |
| Width      | 38.1 mm | Width (inches)  | 1.5 inch   |
| Net weight | 20.42 g |                 |            |

**System Parameters**

|                                              |                                      |                                            |                   |
|----------------------------------------------|--------------------------------------|--------------------------------------------|-------------------|
| Product family                               | OMNIMATE Power - series BV/SV 7.62HP | Type of connection                         | Field connection  |
| Wire connection method                       | Clamping yoke connection             | Pitch in mm (P)                            | 7.62 mm           |
| Pitch in inches (P)                          | 0.3 "                                | Conductor outlet direction                 | 180°              |
| Number of poles                              | 3                                    | L1 in mm                                   | 15.24 mm          |
| L1 in inches                                 | 0.6 "                                | Number of rows                             | 1                 |
| Pin series quantity                          | 1                                    | Rated cross-section                        | 6 mm <sup>2</sup> |
| Touch-safe protection acc. to DIN VDE 57 106 | Safe from finger touch               | Touch-safe protection acc. to DIN VDE 0470 | IP 20             |
| Protection degree                            | IP20                                 | Volume resistance                          | 4.50 mΩ           |
| Can be coded                                 | Yes                                  | Stripping length                           | 12 mm             |
| Tightening torque for screw flange, min.     | 0.2 Nm                               | Tightening torque for screw flange, max.   | 0.3 Nm            |
| Tightening torque, min.                      | 0.5 Nm                               | Tightening torque, max.                    | 0.6 Nm            |
| Clamping screw                               | M 3                                  | Screwdriver blade                          | 0.6 x 3.5         |
| Plugging cycles                              | 25                                   | Plugging force/pole, max.                  | 16.5 N            |
| Pulling force/pole, max.                     | 11 N                                 |                                            |                   |

**Material data**

|                                       |              |                                       |                    |
|---------------------------------------|--------------|---------------------------------------|--------------------|
| Insulating material                   | PA GF        | Colour                                | black              |
| Colour chart (similar)                | RAL 9011     | Insulating material group             | II                 |
| Comparative Tracking Index (CTI)      | ≥ 500        | UL 94 flammability rating             | V-0                |
| Contact base material                 | Copper alloy | Contact material                      | Copper alloy       |
| Contact surface                       | tinned       | Layer structure of plug contact       | 6...8 μm Sn glossy |
| Storage temperature, min.             | -40 °C       | Storage temperature, max.             | 70 °C              |
| Operating temperature, min.           | -50 °C       | Operating temperature, max.           | 125 °C             |
| Temperature range, installation, min. | -25 °C       | Temperature range, installation, max. | 100 °C             |

**Conductors suitable for connection**

|                                                                     |                     |
|---------------------------------------------------------------------|---------------------|
| Clamping range, min.                                                | 0.2 mm <sup>2</sup> |
| Clamping range, max.                                                | 10 mm <sup>2</sup>  |
| Wire connection cross section AWG, min.                             | AWG 24              |
| Wire connection cross section AWG, max.                             | AWG 8               |
| Solid, min. H05(07) V-U                                             | 0.2 mm <sup>2</sup> |
| Solid, max. H05(07) V-U                                             | 6 mm <sup>2</sup>   |
| Flexible, min. H05(07) V-K                                          | 0.2 mm <sup>2</sup> |
| Flexible, max. H05(07) V-K                                          | 10 mm <sup>2</sup>  |
| w. plastic collar ferrule, DIN 46228 pt 4, 0.2 mm <sup>2</sup> min. |                     |
| w. plastic collar ferrule, DIN 46228 pt 4, 6 mm <sup>2</sup> max.   |                     |
| w. wire end ferrule, DIN 46228 pt 1, min.                           | 0.5 mm <sup>2</sup> |
| w. wire end ferrule, DIN 46228 pt 1, max.                           | 6 mm <sup>2</sup>   |

Creation date May 11, 2025 8:15:40 PM CEST

**BVZ 7.62HP/03/180SF SN BK BX****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data**

Plug gauge in accordance with EN 60999 a x b; ø

2.8 mm x 2.0 mm; 2.4 mm

|                                        |                                        |                              |                             |       |
|----------------------------------------|----------------------------------------|------------------------------|-----------------------------|-------|
| Clampable conductor                    | Cross-section for conductor connection | Type                         | fine-wired                  |       |
|                                        |                                        | nominal                      | 0.5 mm <sup>2</sup>         |       |
| wire end ferrule                       |                                        | Stripping length             | nominal                     | 14 mm |
|                                        |                                        | Recommended wire-end ferrule | <a href="#">H0.5/18 OR</a>  |       |
| Cross-section for conductor connection |                                        | Type                         | fine-wired                  |       |
|                                        |                                        | nominal                      | 1 mm <sup>2</sup>           |       |
| wire end ferrule                       |                                        | Stripping length             | nominal                     | 15 mm |
|                                        |                                        | Recommended wire-end ferrule | <a href="#">H1.0/18 GE</a>  |       |
| Cross-section for conductor connection |                                        | Type                         | fine-wired                  |       |
|                                        |                                        | nominal                      | 1.5 mm <sup>2</sup>         |       |
| wire end ferrule                       |                                        | Stripping length             | nominal                     | 15 mm |
|                                        |                                        | Recommended wire-end ferrule | <a href="#">H1.5/18D SW</a> |       |
| wire end ferrule                       |                                        | Stripping length             | nominal                     | 12 mm |
|                                        |                                        | Recommended wire-end ferrule | <a href="#">H1.5/12</a>     |       |
| Cross-section for conductor connection |                                        | Type                         | fine-wired                  |       |
|                                        |                                        | nominal                      | 0.75 mm <sup>2</sup>        |       |
| wire end ferrule                       |                                        | Stripping length             | nominal                     | 14 mm |
|                                        |                                        | Recommended wire-end ferrule | <a href="#">H0.75/18 W</a>  |       |
| Cross-section for conductor connection |                                        | Type                         | fine-wired                  |       |
|                                        |                                        | nominal                      | 2.5 mm <sup>2</sup>         |       |
| wire end ferrule                       |                                        | Stripping length             | nominal                     | 14 mm |
|                                        |                                        | Recommended wire-end ferrule | <a href="#">H2.5/19D BL</a> |       |
| wire end ferrule                       |                                        | Stripping length             | nominal                     | 12 mm |
|                                        |                                        | Recommended wire-end ferrule | <a href="#">H2.5/12</a>     |       |
| Cross-section for conductor connection |                                        | Type                         | fine-wired                  |       |
|                                        |                                        | nominal                      | 4 mm <sup>2</sup>           |       |
| wire end ferrule                       |                                        | Stripping length             | nominal                     | 12 mm |
|                                        |                                        | Recommended wire-end ferrule | <a href="#">H4.0/12</a>     |       |
| wire end ferrule                       |                                        | Stripping length             | nominal                     | 14 mm |
|                                        |                                        | Recommended wire-end ferrule | <a href="#">H4.0/20D GR</a> |       |
| Cross-section for conductor connection |                                        | Type                         | fine-wired                  |       |
|                                        |                                        | nominal                      | 6 mm <sup>2</sup>           |       |
| wire end ferrule                       |                                        | Stripping length             | nominal                     | 14 mm |
|                                        |                                        | Recommended wire-end ferrule | <a href="#">H6.0/20 SW</a>  |       |
| wire end ferrule                       |                                        | Stripping length             | nominal                     | 12 mm |
|                                        |                                        | Recommended wire-end ferrule | <a href="#">H6.0/12</a>     |       |

Reference text

The outside diameter of the plastic collar should not be larger than the pitch (P). Length of ferrules is to be chosen depending on the product and the rated voltage.

## BVZ 7.62HP/03/180SF SN BK BX

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Rated data acc. to IEC

|                                                                           |                        |                                                                       |                   |
|---------------------------------------------------------------------------|------------------------|-----------------------------------------------------------------------|-------------------|
| tested acc. to standard                                                   | IEC 60664-1, IEC 61984 | Rated current, min. number of poles (Tu=20°C)                         | 57 A              |
| Rated current, max. number of poles (Tu=20°C)                             | 54 A                   | Rated current, min. number of poles (Tu=40°C)                         | 51 A              |
| Rated current, max. number of poles (Tu=40°C)                             | 41 A                   | Rated voltage for surge voltage class / pollution degree II/2         | 1,000 V           |
| Rated voltage for surge voltage class / pollution degree III/2            | 1,000 V                | Rated voltage for surge voltage class / pollution degree III/3        | 800 V             |
| Rated impulse voltage for surge voltage class/ pollution degree II/2      | 6,000 V                | Rated impulse voltage for surge voltage class/ pollution degree III/2 | 8 kV              |
| Rated impulse voltage for surge voltage class/ contamination degree III/3 | 8 kV                   | Short-time withstand current resistance                               | 3 x 1s with 420 A |
| Clearance, min.                                                           | 10.2 mm                | Creepage distance, min.                                               | 13.8 mm           |

## Rated data acc. to CSA

|                                   |                                                                                    |                                   |                |
|-----------------------------------|------------------------------------------------------------------------------------|-----------------------------------|----------------|
| Institute (CSA)                   |  | Certificate No. (CSA)             | 200039-1534443 |
| Rated voltage (Use group B / CSA) | 600 V                                                                              | Rated voltage (Use group C / CSA) | 600 V          |
| Rated voltage (Use group D / CSA) | 600 V                                                                              | Rated current (Use group B / CSA) | 40.5 A         |
| Rated current (Use group C / CSA) | 40.5 A                                                                             | Rated current (Use group D / CSA) | 5 A            |
| Wire cross-section, AWG, min.     | AWG 24                                                                             | Wire cross-section, AWG, max.     | AWG 8          |
| Reference to approval values      | Specifications are maximum values, details - see approval certificate.             |                                   |                |

## Rated data acc. to UL 1059

|                                       |                                                                                     |                                       |         |
|---------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------|
| Institute (cURus)                     |  | Certificate No. (cURus)               | E60693  |
| Rated voltage (Use group B / UL 1059) | 600 V                                                                               | Rated voltage (Use group C / UL 1059) | 600 V   |
| Rated voltage (Use group D / UL 1059) | 600 V                                                                               | Rated voltage (Use group F / UL 1059) | 1,000 V |
| Rated current (Use group B / UL 1059) | 40.5 A                                                                              | Rated current (Use group C / UL 1059) | 40.5 A  |
| Rated current (Use group D / UL 1059) | 5 A                                                                                 | Rated current (Use group F / UL 1059) | 40.5 A  |
| Wire cross-section, AWG, min.         | AWG 24                                                                              | Wire cross-section, AWG, max.         | AWG 8   |
| Reference to approval values          | Specifications are maximum values, details - see approval certificate.              |                                       |         |

## Packing

|           |        |            |        |
|-----------|--------|------------|--------|
| Packaging | Box    | VPE length | 336 mm |
| VPE width | 149 mm | VPE height | 91 mm  |

**BVZ 7.62HP/03/180SF SN BK BX****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Type tests**

|                                              |                |                                                                                    |
|----------------------------------------------|----------------|------------------------------------------------------------------------------------|
| Test: Durability of markings                 | Standard       | DIN EN 61984 section 7.3.2 / 09.02 taking pattern from DIN EN 60068-2-70 / 07.96   |
|                                              | Test           | mark of origin, type identification, pitch, type of material                       |
|                                              | Evaluation     | available                                                                          |
|                                              | Test           | durability                                                                         |
|                                              | Evaluation     | passed                                                                             |
| Test: Misengagement (Non-interchangeability) | Standard       | DIN EN 61984 section 6.3 and 6.9.1 / 09.02, DIN IEC 512 part 7 section 5 / 05.94   |
|                                              | Test           | 180° turned with coding elements                                                   |
|                                              | Evaluation     | passed                                                                             |
|                                              | Test           | 180° turned without coding elements                                                |
|                                              | Evaluation     | passed                                                                             |
| Test: Clampable cross section                | Standard       | DIN EN 60999-1 section 7 and 9.1 / 12.00, DIN EN 60947-1 section 8.2.4.5.1 / 12.02 |
|                                              | Conductor type | Type of conductor and solid 0.5 mm <sup>2</sup> conductor cross-section            |
|                                              |                | Type of conductor and stranded 0.5 mm <sup>2</sup> conductor cross-section         |
|                                              |                | Type of conductor and solid 6 mm <sup>2</sup> conductor cross-section              |
|                                              |                | Type of conductor and stranded 6 mm <sup>2</sup> conductor cross-section           |
|                                              |                | Type of conductor and AWG 24/1 conductor cross-section                             |
|                                              |                | Type of conductor and AWG 24/19 conductor cross-section                            |
|                                              |                | Type of conductor and AWG 10/1 conductor cross-section                             |
|                                              |                | Type of conductor and AWG 10/19 conductor cross-section                            |
|                                              | Evaluation     | passed                                                                             |

**BVZ 7.62HP/03/180SF SN BK BX****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data**

|                                                           |                |                                                                            |
|-----------------------------------------------------------|----------------|----------------------------------------------------------------------------|
| Test for damage to and accidental loosening of conductors | Standard       | DIN EN 60999-1 section 9.4 / 12.00                                         |
|                                                           | Requirement    | 0.2 kg                                                                     |
|                                                           | Conductor type | Type of conductor and AWG 24/1 conductor cross-section                     |
|                                                           |                | Type of conductor and AWG 24/19 conductor cross-section                    |
|                                                           | Evaluation     | passed                                                                     |
|                                                           | Requirement    | 0.3 kg                                                                     |
|                                                           | Conductor type | Type of conductor and solid 0.5 mm <sup>2</sup> conductor cross-section    |
|                                                           |                | Type of conductor and stranded 0.5 mm <sup>2</sup> conductor cross-section |
|                                                           | Evaluation     | passed                                                                     |
|                                                           | Requirement    | 1.4 kg                                                                     |
| Pull-out test                                             | Conductor type | Type of conductor and solid 6 mm <sup>2</sup> conductor cross-section      |
|                                                           |                | Type of conductor and stranded 6 mm <sup>2</sup> conductor cross-section   |
|                                                           | Conductor type | Type of conductor and AWG 10/1 conductor cross-section                     |
|                                                           |                | Type of conductor and AWG 10/19 conductor cross-section                    |
|                                                           | Evaluation     | passed                                                                     |
|                                                           | Standard       | DIN EN 60999-1 section 9.5 / 12.00                                         |
|                                                           | Requirement    | ≥10 N                                                                      |
|                                                           | Conductor type | Type of conductor and AWG 24/1 conductor cross-section                     |
|                                                           |                | Type of conductor and AWG 24/19 conductor cross-section                    |
|                                                           | Evaluation     | passed                                                                     |
|                                                           | Conductor type | Type of conductor and solid 0.5 mm <sup>2</sup> conductor cross-section    |
|                                                           |                | Type of conductor and stranded 0.5 mm <sup>2</sup> conductor cross-section |
|                                                           | Evaluation     | passed                                                                     |
|                                                           | Requirement    | ≥20 N                                                                      |
|                                                           | Conductor type | Type of conductor and solid 6 mm <sup>2</sup> conductor cross-section      |
|                                                           |                | Type of conductor and stranded 6 mm <sup>2</sup> conductor cross-section   |
|                                                           | Conductor type | Type of conductor and AWG 10/1 conductor cross-section                     |
|                                                           |                | Type of conductor and AWG 10/19 conductor cross-section                    |
|                                                           | Evaluation     | passed                                                                     |
|                                                           | Requirement    | ≥80 N                                                                      |

## BVZ 7.62HP/03/180SF SN BK BX

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC002638    | ETIM 7.0    | EC002638    |
| ETIM 8.0    | EC002638    | ETIM 9.0    | EC002638    |
| ETIM 10.0   | EC002638    | ECLASS 9.0  | 27-44-03-09 |
| ECLASS 9.1  | 27-44-03-09 | ECLASS 10.0 | 27-44-03-09 |
| ECLASS 11.0 | 27-46-02-02 | ECLASS 12.0 | 27-46-02-02 |
| ECLASS 13.0 | 27-46-02-02 | ECLASS 14.0 | 27-46-02-02 |
| ECLASS 15.0 | 27-46-02-02 |             |             |

## Environmental Product Compliance

|                        |                             |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC             | No SVHC above 0.1 wt%       |

## Important note

|                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IPC conformity | Conformity: The products are developed, manufactured and delivered according international recognized standards and norms and comply with the assured properties in the data sheet resp. fulfill decorative properties in accordance with IPC-A-610 "Class 2". Further claims on the products can be evaluated on request.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Notes          | <ul style="list-style-type: none"> <li>• Additional variants on request</li> <li>• Rated current related to rated cross-section &amp; min. No. of poles.</li> <li>• Wire end ferrule with plastic collar to DIN 46228/4</li> <li>• Wire end ferrule without plastic collar to DIN 46228/1</li> <li>• P on drawing = pitch</li> <li>• Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.</li> <li>• In accordance with IEC 61984, OMNIMATE-connectors are connectors without breaking capacity (COC). During designated use, connectors are not allowed to be engaged or disengaged when live or under load</li> <li>• Long term storage of the product with average temperature of 50 °C and maximum humidity 70%, 36 months</li> </ul> |

## Approvals

Approvals



|                         |                                                                                                                                                                                                                                                                                                                                                         |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Approvals MAMID         | <a href="https://mdcop.weidmueller.com/mediadelivery/rendition/900_319226/-T1z1mm-S800/">https://mdcop.weidmueller.com/mediadelivery/rendition/900_319226/-T1z1mm-S800/</a> <a href="https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/">https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/</a> |
| ROHS                    | Conform                                                                                                                                                                                                                                                                                                                                                 |
| UL File Number Search   | UL Website                                                                                                                                                                                                                                                                                                                                              |
| Certificate No. (cURus) | E60693                                                                                                                                                                                                                                                                                                                                                  |

**BVZ 7.62HP/03/180SF SN BK BX****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Technical data****Downloads**Approval/Certificate/Document of Con-  
formity[Declaration of the Manufacturer](#)

Engineering Data

[CAD data – STEP](#)

Product Change Notification

[PCN\\_2016\\_138\\_PL33\\_Redesign\\_BVZ\\_762HP\\_Abstandshalter\\_DE](#)[PCN\\_2016\\_138\\_PL33\\_Redesign\\_BVZ\\_762HP\\_outside\\_pole\\_spacer\\_EN](#)[PCN\\_2016\\_275\\_PL33\\_plugable\\_SIBL\\_EN](#)[PCN\\_2016\\_275\\_PL33\\_Steckbare\\_SIBL\\_DE](#)[20220201 Visual change OMNIMATE® Power PCB terminal blocks and connectors](#)[20220201 Visuelle Änderung OMNIMATE® Power Leiterplattenklemmen und -steckverbinder](#)[20220208 Visual change Temporarily different color for connectors and accessories](#)[20220208 Visuelle Änderung Vorübergehend anderer Farbton für Steckverbinder und Zubehör](#)[Packing change of BVZ 7.62HP and SVZ 7.62HP](#)[Änderung der Verpackung BVZ 7.62HP und SVZ 7.62HP](#)

User Documentation

[QR-Code product handling video](#)

Catalogues

[Catalogues in PDF-format](#)

Brochures

[FL DRIVES EN](#)[MB DEVICE MANUF. EN](#)[FL DRIVES DE](#)[FL HEATING ELECTR EN](#)[FL APPL INVERTER EN](#)[FL BASE STATION EN](#)[FL ELEVATOR EN](#)[FL POWER SUPPLY EN](#)[FL 72H SAMPLE SER EN](#)[PO OMNIMATE EN](#)[PO OMNIMATE EN](#)




## BVZ 7.62HP/03/180SF SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany


[www.weidmueller.com](http://www.weidmueller.com)

## Drawings


### Product image




### Dimensional drawing

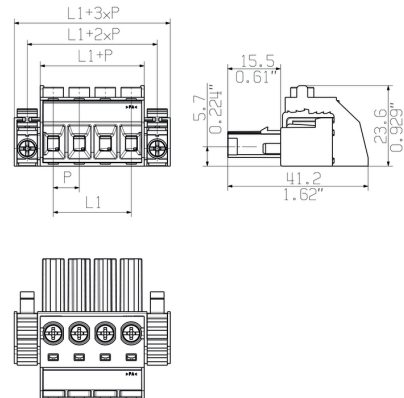

### Graph

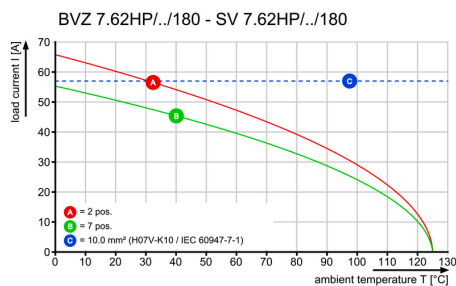

### Graph

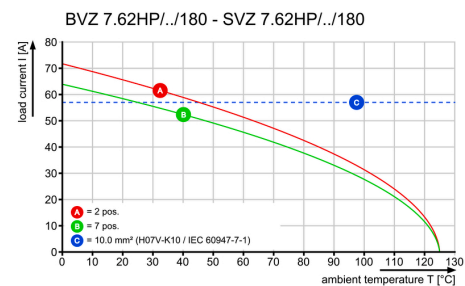

**BVZ 7.62HP/03/180SF SN BK BX**
**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Accessories**
**Coding elements**


**The pluggable connections for power electronics - optimised for modern drive technologies, e.g. motor starters, frequency converters and servo-controllers.**

OMNIMATE Power sets the new standard – with increased safety and innovative solutions such as the pluggable shield, integrated signal contacts and one-handed operation.

The three product lines offer you further advantages:

- Application-oriented scalability: from the compact 4 mm<sup>2</sup> connector for 29 A (IEC) or 20 A (UL) up to the sturdy 16 mm<sup>2</sup> connector for 76 A (IEC) or 54 A (UL)
- Unlimited usage up to 1,000 V (IEC) or 600 V (UL)
- A variety of application optimised mounting options

Our Service:

Design your individual connectors simply by using the

**General ordering data**

| Type       | BV/SV 7.62HP KO RD 2022    | Version                                                            | Product data | Packaging |
|------------|----------------------------|--------------------------------------------------------------------|--------------|-----------|
| Order No.  | <a href="#">2007300000</a> | PCB plug-in connector, Accessories, Coding element, red, Number of |              | Box       |
| GTIN (EAN) | 4050118392715              | poles: 1                                                           |              |           |
| Qty.       | 20 pc(s).                  |                                                                    |              |           |

**Adapters for rail mounting**


**The pluggable connections for power electronics - optimised for modern drive technologies, e.g. motor starters, frequency converters and servo-controllers.**

OMNIMATE Power sets the new standard – with increased safety and innovative solutions such as the pluggable shield, integrated signal contacts and one-handed operation.

The three product lines offer you further advantages:

- Application-oriented scalability: from the compact 4 mm<sup>2</sup> connector for 29 A (IEC) or 20 A (UL) up to the sturdy 16 mm<sup>2</sup> connector for 76 A (IEC) or 54 A (UL)
- Unlimited usage up to 1,000 V (IEC) or 600 V (UL)
- A variety of application optimised mounting options

Our Service:

Design your individual connectors simply by using the

**General ordering data**

| Type       | BV/SV 7.62HP/04 ARPL GR    | Version                                                             | Product data | Packaging |
|------------|----------------------------|---------------------------------------------------------------------|--------------|-----------|
| Order No.  | <a href="#">1937580000</a> | PCB plug-in connector, Accessories, Mounting plate, grey, Number of |              | Box       |
| GTIN (EAN) | 4032248608867              | poles: 4                                                            |              |           |
| Qty.       | 50 pc(s).                  |                                                                     |              |           |

**BVZ 7.62HP/03/180SF SN BK BX****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Accessories**

| Type       | BV/SV 7.62HP/02 ARPL GR    | Version                                                                      | Product data | Packaging |
|------------|----------------------------|------------------------------------------------------------------------------|--------------|-----------|
| Order No.  | <a href="#">1937570000</a> | PCB plug-in connector, Accessories, Mounting plate, grey, Number of poles: 2 |              | Box       |
| GTIN (EAN) | 4032248608850              |                                                                              |              |           |
| Qty.       | 50 pc(s).                  |                                                                              |              |           |

| Type       | BV/SV7.62HP MOFU GR        | Version                                                       | Product data | Packaging |
|------------|----------------------------|---------------------------------------------------------------|--------------|-----------|
| Order No.  | <a href="#">1937600000</a> | PCB plug-in connector, Accessories, Mounting foot, Light Grey |              | Box       |
| GTIN (EAN) | 4032248608898              |                                                               |              |           |
| Qty.       | 100 pc(s).                 |                                                               |              |           |

**Crosshead screwdriver Phillips**

VDE insulated crosshead screwdriver, for Phillips screws, SDIK PH DIN 7438, ISO 8764/2-PH, output to ISO 8764-PH, SoftFinish grip

**General ordering data**

| Type       | SDIK PH1                   | Version                  |
|------------|----------------------------|--------------------------|
| Order No.  | <a href="#">9008570000</a> | Screwdriver, Screwdriver |
| GTIN (EAN) | 4032248056569              |                          |
| Qty.       | 1 pc(s).                   |                          |

**Slotted screwdriver**

VDE insulated slot-head screwdriver, SDI DIN 7437, ISO 2380/2, drive output acc. to DIN 5264, ISO 2380/1. SoftFinish grip

**General ordering data**

| Type       | SDIS 0.8X4.0X100           | Version                  |
|------------|----------------------------|--------------------------|
| Order No.  | <a href="#">9008400000</a> | Screwdriver, Screwdriver |
| GTIN (EAN) | 4032248056361              |                          |
| Qty.       | 1 pc(s).                   |                          |

**BVZ 7.62HP/03/180SF SN BK BX****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Accessories****Crosshead screwdriver Phillips**

Crosshead screwdriver, Phillips, SDK PH DIN 5262, ISO 8764/2-PH, output to ISO 8764-PH, ChromTop tip, SoftFinish grip

**General ordering data**

|            |                            |                          |
|------------|----------------------------|--------------------------|
| Type       | SDK PH1                    | Version                  |
| Order No.  | <a href="#">9008480000</a> | Screwdriver, Screwdriver |
| GTIN (EAN) | 4032248056477              |                          |
| Qty.       | 1 pc(s).                   |                          |

**Crimping tools****Crimping tools for wire end ferrules, with and without plastic collars**

- Ratchet guarantees precise crimping
- Release option in the event of incorrect operation

**General ordering data**

|            |                            |                                                                    |
|------------|----------------------------|--------------------------------------------------------------------|
| Type       | PZ 6/5                     | Version                                                            |
| Order No.  | <a href="#">9011460000</a> | Pressing tool, Crimping tool for wire-end ferrules, 0.25mm², 6mm², |
| GTIN (EAN) | 4008190165352              | Trapezoidal indentation crimp                                      |
| Qty.       | 1 pc(s).                   |                                                                    |

## BVZ 7.62HP/03/180SF SN BK BX

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Strain reliefs

**For frequent load changes: the "trailer coupling" for plug-in connectors.**

The strain relief can do more than just relieve the strain on conductors:

Simply clip onto the plug and

- bundle conductors
- guide cables
- use as a connection and disconnection aid


No damage to the connecting points, clear, tidy wiring and easy to handle.

User advantages: permanent heavy-duty connections for harsh industrial environments and convenient operation ensure improved system availability.

## General ordering data

| Type       | BV/SV 7.62HP/04 ZE GR      | Version                                                                           | Product data | Packaging |
|------------|----------------------------|-----------------------------------------------------------------------------------|--------------|-----------|
| Order No.  | <a href="#">1937560000</a> | PCB plug-in connector, Accessories, Strain relief, Light Grey, Number of poles: 4 |              | Box       |
| GTIN (EAN) | 4032248608843              |                                                                                   |              |           |
| Qty.       | 50 pc(s).                  |                                                                                   |              |           |
| Type       | BV/SV 7.62HP/02 ZE GR      | Version                                                                           | Product data | Packaging |
| Order No.  | <a href="#">1937550000</a> | PCB plug-in connector, Accessories, Strain relief, Light Grey, Number of poles: 2 |              | Box       |
| GTIN (EAN) | 4032248608836              |                                                                                   |              |           |
| Qty.       | 50 pc(s).                  |                                                                                   |              |           |

## Slotted screwdriver



Slotted screwdriver with rounded blade SD DIN 5265, ISO 2380/2, output to DIN 5264, ISO 2380/1. ChromTop tip, SoftFinish grip

## General ordering data

| Type       | SDS 0.8X4.5X125            | Version                  |
|------------|----------------------------|--------------------------|
| Order No.  | <a href="#">9009020000</a> | Screwdriver, Screwdriver |
| GTIN (EAN) | 4032248266883              |                          |
| Qty.       | 1 pc(s).                   |                          |









The reproduction, distribution and utilization of this document as well as the communication of its contents to others without explicit authorization is prohibited. Offenders will be held liable for the payment of damages. Weidmüller exclusively reserves the right to file for patents, utility models or designs.

© Weidmüller Interface GmbH & Co. KG

Dimensions without tolerances are no check dimensions

SHOWN: BVZ 7.62HP/04/180F ...

The English version is binding

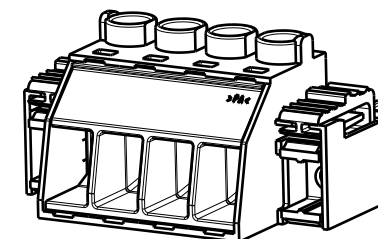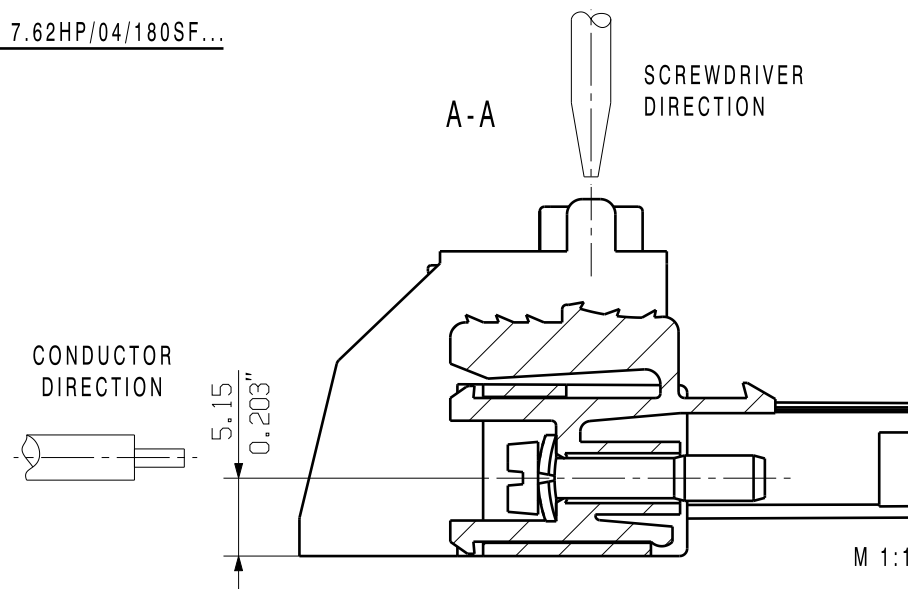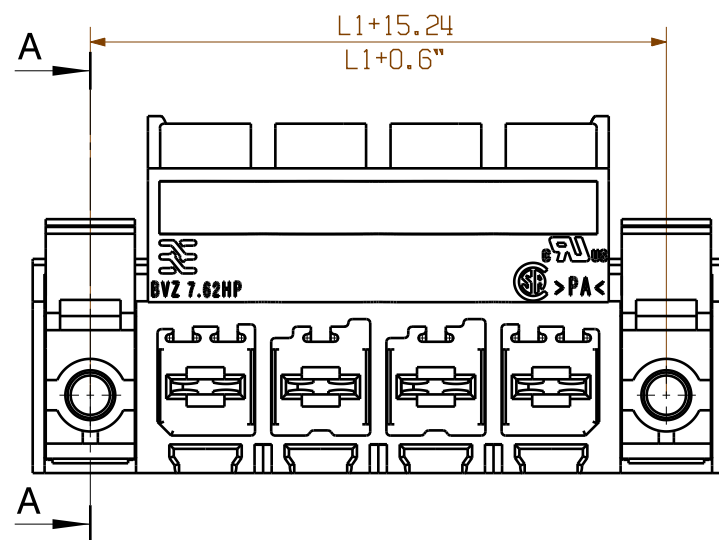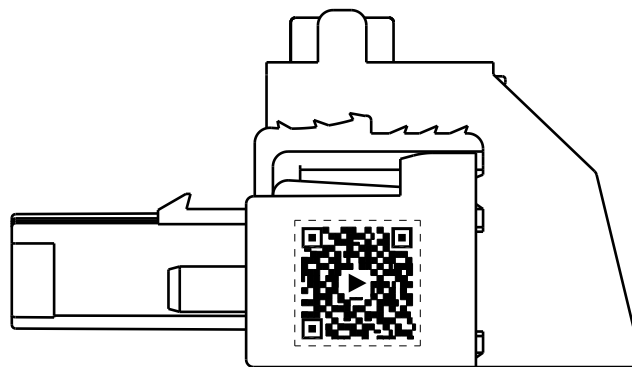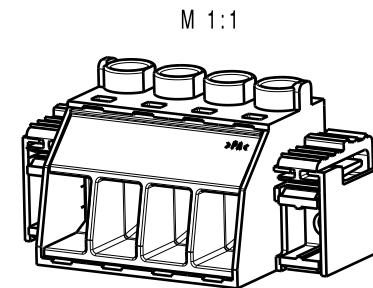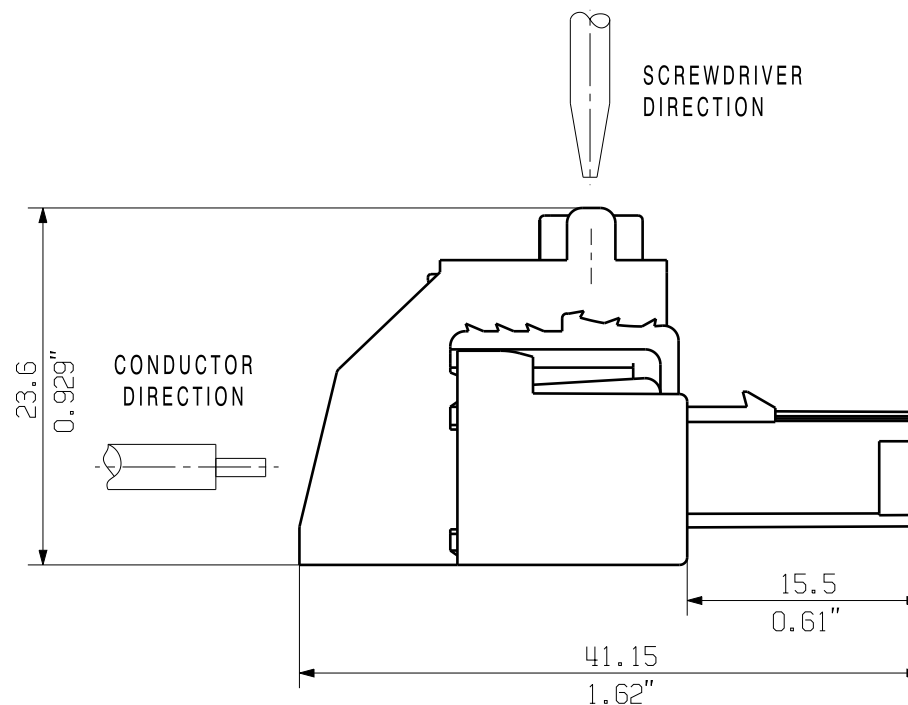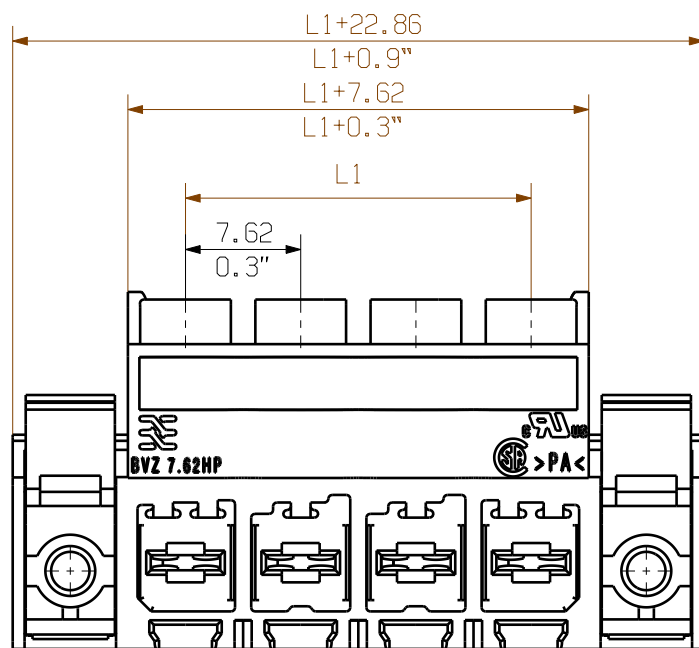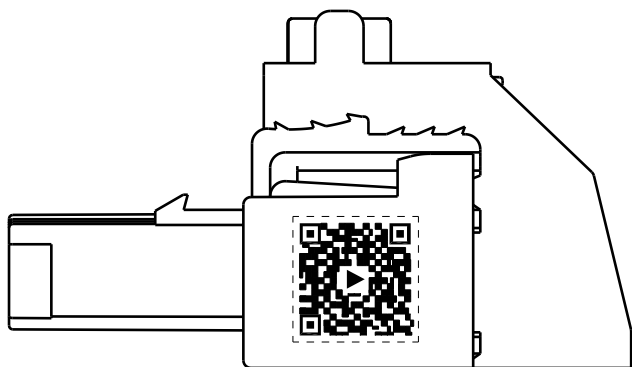

|    |                  |                            |
|----|------------------|----------------------------|
| 12 | 83.82            | 3.3                        |
| 11 | 76.20            | 3.0                        |
| 10 | 68.58            | 2.7                        |
| 9  | 60.96            | 2.4                        |
| 8  | 53.34            | 2.1                        |
| 7  | 45.72            | 1.8                        |
| 6  | 38.10            | 1.5                        |
| 5  | 30.48            | 1.2                        |
| 4  | 22.86            | 0.9                        |
| 3  | 15.24            | 0.6                        |
| 2  | 7.62             | 0.3                        |
| n  | POLZAHL<br>POLES | L1<br>[mm]<br>L1<br>[inch] |

HINWEIS: QR Code bitte noch nicht berücksichtigen!  
INFORMATION: Please do not consider the QR code yet

ALLGEMEINGUELTIGE KUNDENZEICHNUNG, AKTUELLER STAND NUR AUF ANFRAGE  
GENERAL CUSTOMER DRAWING, TOPICAL VERSION ONLY IF REQUIRED

For the mounting of PCBs, it should be noted that the rated data given in the catalogue relates only to the connection elements. The necessary creepage and clearance paths must be observed in connection with the respective applicant in accordance to VDE 0110. The current-carrying capacity and pitch tolerance is to be determined according to DIN IEC 326 part 3 very fine.

Weidmüller connectors are tested to the DIN VDE 0627 standard, and are valid for its field of application. Provided that the connectors are used to the intended purpose, all requirements with respect to the occurring of electrical, mechanical, thermic and corrosive stress will be satisfied.

GENERAL TOLERANCE:  
DIN ISO 2768-mK

|                                       |                                                                                              |                           |                                                                                     |                               |                                                         |
|---------------------------------------|----------------------------------------------------------------------------------------------|---------------------------|-------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------|
|                                       | EC00001750                                                                                   | Prim PLM Part No.: 026887 |                                                                                     | Prim ERP Part No.: 1930070000 |                                                         |
|                                       | First Issue Date<br>15.01.2007                                                               | Max. nos.<br>Modification |                                                                                     |                               | 42180<br>Drawing no. Issue no.<br>Sheet 02 of 03 sheets |
|                                       | Drawn<br>23.05.2019<br>Responsible<br>Döhrer, Karl<br>Approved<br>18.06.2019<br>Lang, Thomas | Date<br>Name              |                                                                                     |                               |                                                         |
| Scale: 2:1 Size: A3 Drawings Assembly |                                                                                              |                           | BVZ 7.62HP/...F<br>BUCHSENSTECKER<br>FEMALE PLUG<br>Product file: 7340 SV/BVZ7.62HP |                               |                                                         |