date: 22/10/2026

# BLIZ ROUND 30 EM/3P

## Part number 304238

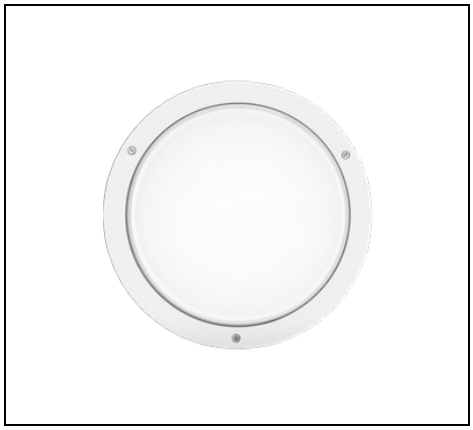

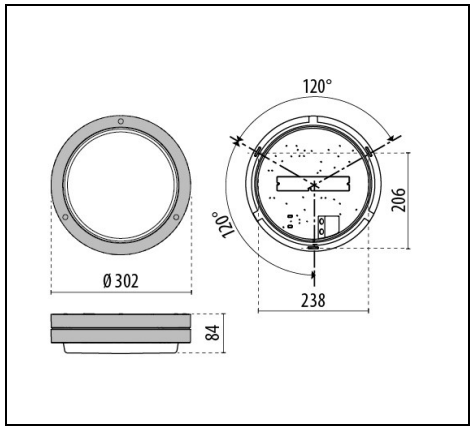


IP 65 | CLASS I | 3h

### Description

Wall and ceiling mounted LED luminaire for indoor and outdoor, comprising:

- Die-cast aluminium housing and trim, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Pressed glass diffuser, internally coated
- Anti-ageing custom moulded silicone sealing gasket(s)
- Through-wiring designed
- Stainless steel locking hardware
- EM/3P version is designed for multipurpose 3 hours sustained emergency lighting
- 3 hours

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
**PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy**
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

**info.it@pil.lighting**
www.performanceinlighting.com

## Product data

| | | | |
|---|---|---|---|
| **ETIM Group:** | EG000027 | **ETIM Class:** | EC002892 |

## General information

| | | | |
|---|---|---|---|
| **Lampholder:** | LED | **Light source:** | LED |
| **Lightsource lumen output [lm]:** | 3014 | **Luminaire lumen output [lm]:** | 1555 |
| **Luminaire wattage [W]:** | 21.5 W | **Luminous efficacy [lm/W]:** | 72 |
| **CRI:** | 80 | **Colour temperature [K]:** | 3000 |
| **Colour / Finishing:** | WH-87 / White / Textured | **IP degree of protection:** | IP65 |
| **Impact resistance / impact energy:** | IK08 5J xx5 | **Protection class:** | I |
| **Optic:** | S/EW - Symmetric Extra-Wide | **Net weight [kg]:** | 4.257 |
| **Overall diameter [mm]:** | 302 | **Overall width [mm]:** | 84 |

## Mechanical features

| | | | |
|---|---|---|---|
| **Shape:** | Round ≥ 300 mm | **Housing material:** | Aluminium |
| **Diffuser material:** | Glass | | |

## Electrical features

| | | | |
|---|---|---|---|
| **Voltage type:** | AC | **Input voltage [V AC]:** | 220/240 |
| **Input frequency [Hz]:** | 50/60 | **Power factor / COS Φ:** | >0.9 |
| **Inrush current [A/µs]:** | 5 / 70 | **C10 1.5 mm²:** | 41 |
| **C16 2.5 mm²:** | 66 | **B10 1.5 mm²:** | 27 |
| **B16 2.5 mm²:** | 44 | | |

## Installation

| | | | |
|---|---|---|---|
| **Application area:** | Outdoor lighting | **Mounting type:** | Bulkhead |
| **Min. ambient temperature [°C]:** | 0 | **Max. ambient temperature [°C]:** | 25 |

## Light features

| | | | |
|---|---|---|---|
| **MacAdam:** | 3 | **Lumen maintenance:** | L80B10@65000h |
| **Distribution of light emission:** | Direct | | |

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
**PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy**
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

**info.it@pil.lighting**
www.performanceinlighting.com

## Photometric data

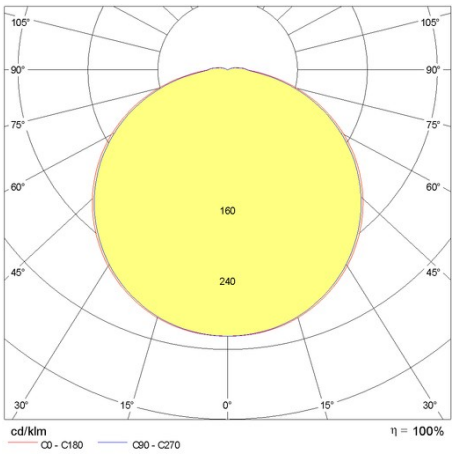


To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
**PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy**
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

**info.it@pil.lighting**
www.performanceinlighting.com