


KSB50SF5

Tap off unit, Canalis KS 100A to 1000A, with fuse holder, 50A, NF 14x51mm fuses not supplied, 3L+PEN, IP55, RAL9001

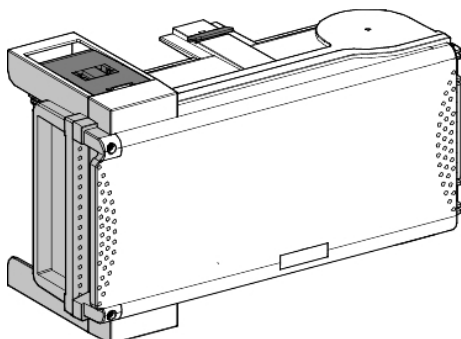

Main

Range of product	Canalis
Range compatibility	Canalis KT busbar trunking Canalis KS busbar trunking
Product or component type	Tap-off unit
Busbar trunking compatibility	Canalis KS busbar trunking plug-in Canalis KT busbar trunking with KS type plug-in
[Ie] rated operational current	50 A at 35 °C
Protection type	Fuse isolator: for aM cylindrical fuse, size 14 x 51 mm - 50 A conforming to NF Fuse isolator: for gG cylindrical fuse, size 14 x 51 mm - 50 A conforming to NF
Provided equipment	Fuse to be ordered separately
Mounting mode	Plug-in with fixed polarity
Tap-off unit polarity	3L+PEN
Colour	White (RAL 9001)

Complementary

Device application	Medium power distribution
[Ue] rated operational voltage	230...690 V depending on protective device
[Uimp] rated impulse withstand voltage	6.8 kV
[Ui] rated insulation voltage	500 V depending on protective device
Network frequency	50/60 Hz
Electrical connection	Cable clamp terminal - ISO50 25 mm² flexible Cable clamp terminal - ISO50 25 mm² rigid
Door/cover opening side	Right
Tap-off unit disconnection mode	By opening the door
Standards	IEC 61439-1 IEC 61439-6
Body material	Plastic
Width	356 mm
Depth	103 mm
Depth (door open)	432.5 mm
Height	202 mm
Net weight	2.4 kg

Environment

Earthing system	TN-C
IP degree of protection	IP55 conforming to IEC 60529
IK degree of protection	IK08 conforming to IEC 62262

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	16.700 cm
Package 1 Width	22.500 cm
Package 1 Length	35.800 cm

Package 1 Weight	2.142 kg
Unit Type of Package 2	P12
Number of Units in Package 2	38
Package 2 Height	80.000 cm
Package 2 Width	80.000 cm
Package 2 Length	120.000 cm
Package 2 Weight	105.000 kg

Offer Sustainability

REACH Regulation	 REACH Declaration
EU RoHS Directive	Compliant with Exemptions
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Halogen content performance	Halogen free product

Contractual warranty

Warranty	18 months
----------	-----------