
Busbar terminal

SKL 535

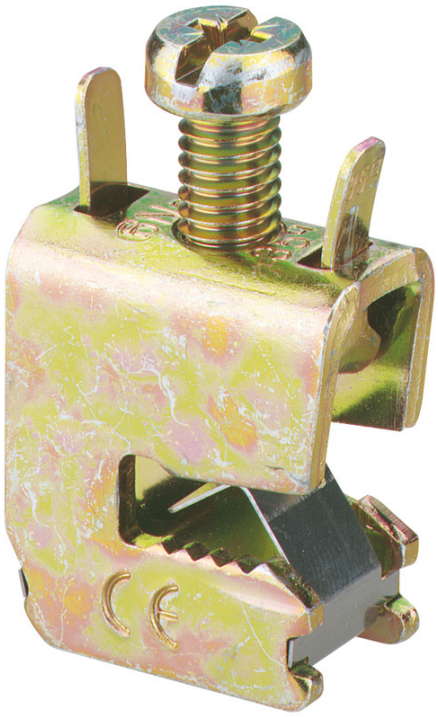

SKL 535

Busbar terminal

Productnumber: 07553501
Dimensions: 16 x 26,5 x 31,5 mm

Bus bar terminals for copper rails 12/20/25/30 x 5 mm

Connection for Cu 1.5-35 mm², Flat copper 160 A

35²

Technical Data

electrical characteristics

Max. conductor cross section:	35 mm²
Rated current:	270 A
Number of poles:	1
shockproof:	No
Connection 1: Connection type:	Screws
Connection 1: Clamping points per pole:	1
Connection 1: Suitable for Cu conductors:	1
Connection 1: Suitable for Al conductors:	1
Connection 1: Connectable conductor cross-section, single-wire (min):	4 mm²
Connection 1: Connectable conductor cross-section, single-wire (max):	35 mm²
Connection 1: Connectable conductor cross-section, stranded (min):	4 mm²
Connection 1:Connectable conductor cross-section, stranded (max):	35 mm²

Dimensions

Width:	16 mm
Length:	26.5 mm
Height:	31.5 mm
Weight:	0.045 kg

mechanical properties

Connection 1: Tightening moment:	6 Nm

Sales Information

EAN:	4013902051915
ETIM Class:	EC000001
Custom tariff number:	85369010
Minimum order quantity:	1