

HDC 32A SDBO 1M25G**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

General ordering data

Version	HDC enclosures, Size: 7, Protection degree: IP65 (in plugged condition), Base housing, Side-locking clamp on upper side, Standard, with cover, Size of cable entries: M 25
Order No.	1903900000
Type	HDC 32A SDBO 1M25G
GTIN (EAN)	4032248586127
Qty.	1 pc(s).

HDC 32A SDBO 1M25G

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Height	97 mm	Height (inches)	3.819 inch
Width	89.2 mm	Width (inches)	3.512 inch
Mounting dimension - height	46 mm	Mounting dimension - width	92 mm
Net weight	488 g		

Temperatures

Limit temperature	-40 °C ... 125 °C
-------------------	-------------------

Dimensions

Cable entry	w. thread	Height of base B1	5 mm
Height of housing B	75 mm	Hole pitch length A2	92 mm
Total length housing	82 mm	Width base C1	64.5 mm
Width housing C	56 mm		

General data

EMC housings	No	Housing main material	diecast aluminium
Material of locking element	Stainless steel, rust-proof	Protection class note	Protection class for this version of cover: IP20
Protection degree	IP65 (in plugged condition)	Surface finish	Powder coating
Tightening torque	1.2 Nm		

Version

BG	7	Cable entry	w. thread
Clamp version	Side-locking clamp	Colour (RAL)	RAL 7035
Cover	with cover	Design	Standard
Design of cover	with cover	Design of housing	Base housing
Design of locking system	Side-locking clamp on upper side	Internal thread	M 25
Number of cable entry on top	0	Number of cable entry sideways	1
Sealing	NBR	Size	7
Size of cable entries	M 25	Suitable for ModuPlug®	No
Tightening torque	1.2 Nm	Top part/bottom part/lid	lower part
Type	Base housing		

Classifications

ETIM 6.0	EC000437	ETIM 7.0	EC000437
ETIM 8.0	EC000437	ETIM 9.0	EC000437
ETIM 10.0	EC000437	ECLASS 9.0	27-44-02-02
ECLASS 9.1	27-44-02-02	ECLASS 10.0	27-44-02-02
ECLASS 11.0	27-44-02-02	ECLASS 12.0	27-44-02-02
ECLASS 13.0	27-44-02-02	ECLASS 14.0	27-44-02-02
ECLASS 15.0	27-44-02-02		

Substance	Acetone
Chemical resistance	Conditionally resistant
Substance	Drilling oil
Chemical resistance	Resistant

HDC 32A SDBO 1M25G

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Substance	Diesel
Chemical resistance	Resistant
Substance	Ethyl alcohol
Chemical resistance	Resistant
Substance	Transmission oil
Chemical resistance	Resistant
Substance	Hydraulic oil
Chemical resistance	Resistant
Substance	Coolant
Chemical resistance	Resistant
Substance	Petroleum benzine
Chemical resistance	Resistant
Substance	Sweat
Chemical resistance	Resistant
Substance	Premium gasoline
Chemical resistance	Conditionally resistant
Substance	Water
Chemical resistance	Resistant
Substance	UV
Chemical resistance	Unstable
Substance	Ozone
Chemical resistance	Unstable

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%
Chemical resistance	de.myview.objectmodel.impl.BlockImpl@26a9c6dc de.myview.objectmodel.impl.BlockImpl@bcf5f51 de.myview.objectmodel.impl.BlockImpl@1bcd64b de.myview.objectmodel.impl.BlockImpl@46f50aba de.myview.objectmodel.impl.BlockImpl@2e02bb9e de.myview.objectmodel.impl.BlockImpl@5f465cd8 de.myview.objectmodel.impl.BlockImpl@2acc36e5 de.myview.objectmodel.impl.BlockImpl@448249dc de.myview.objectmodel.impl.BlockImpl@7f67c499 de.myview.objectmodel.impl.BlockImpl@12aae731 de.myview.objectmodel.impl.BlockImpl@599a909f de.myview.objectmodel.impl.BlockImpl@f80eed9 de.myview.objectmodel.impl.BlockImpl@4e02a0bc

Approvals

Approvals



Approvals MAMID	https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/
ROHS	Conform
UL File Number Search	UL Website
Certificate No. (cURus)	E92202

Creation date May 11, 2025 8:05:25 PM CEST

Catalogue status 26.04.2025 / We reserve the right to make technical changes.

HDC 32A SDBO 1M25G

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Downloads


Engineering Data	CAD data – STEP
Product Change Notification	20220214 Technical change to HDC housings 20220214 Technische Änderung bei HDC-Gehäusen
Catalogues	Catalogues in PDF-format
Brochures	FL FIELDWIRING EN FL FIELDWIRING EN

HDC 32A SDBO 1M25G

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

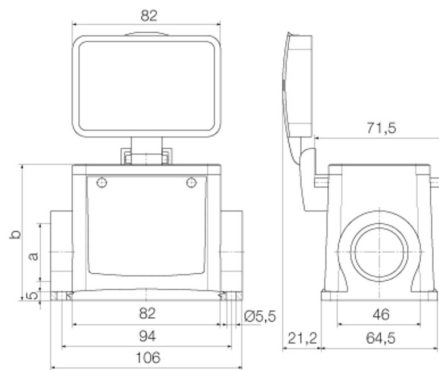

HDC 32A SDBO 1M25G

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Hood, Cable Entry sideways



The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

General ordering data


Type	HDC 32A TSBO 1M32G	Version
Order No.	1787970000	HDC enclosures, Size: 7, Protection degree: IP65 (in plugged condition), Cable entry from side, Plug housing, Side-locking clamp on upper side, Standard, Size of cable entries: M 32
GTIN (EAN)	4032248205417	
Qty.	1 pc(s).	
Type	HDC 32A TSBO 1M25G	Version
Order No.	1787980000	HDC enclosures, Size: 7, Protection degree: IP65 (in plugged condition), Cable entry from side, Plug housing, Side-locking clamp on upper side, Standard, Size of cable entries: M 25
GTIN (EAN)	4032248205424	
Qty.	1 pc(s).	
Type	HDC 32A TSBO 1PG29G	Version
Order No.	1666270000	HDC enclosures, Size: 7, Protection degree: IP65 (in plugged condition), Cable entry from side, Plug housing, Side-locking clamp on upper side, Standard, Size of cable entries: PG 29
GTIN (EAN)	4008190423315	
Qty.	1 pc(s).	

HDC 32A SDBO 1M25G**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Accessories****Hood, Cable Entry at top**

The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

General ordering data

Type	HDC 32A TOBO 1M32G	Version
Order No.	1788010000	HDC enclosures, Size: 7, Protection degree: IP65 (in plugged condition), Cable entry from top, Plug housing, Side-locking clamp on upper side, Standard, Size of cable entries: M 32
GTIN (EAN)	4032248205455	
Qty.	1 pc(s).	