

**ALO 16****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Product image**

Our feed-in terminal blocks in combination with cross-connections offer the possibility of flexible potential distribution on terminal blocks with a different rated cross-section.

**General ordering data**

|            |                                                                        |
|------------|------------------------------------------------------------------------|
| Version    | Supply terminal, PUSH IN, 16 mm <sup>2</sup> , 800 V, 76 A, dark beige |
| Order No.  | <a href="#">2502280000</a>                                             |
| Type       | ALO 16                                                                 |
| GTIN (EAN) | 4050118515787                                                          |
| Qty.       | 20 pc(s).                                                              |

## ALO 16

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|                          |            |                |            |
|--------------------------|------------|----------------|------------|
| Depth                    | 51.5 mm    | Depth (inches) | 2.028 inch |
| Depth including DIN rail | 52.5 mm    | Height         | 95.5 mm    |
| Height (inches)          | 3.76 inch  | Width          | 12 mm      |
| Width (inches)           | 0.472 inch | Net weight     | 41.911 g   |

## Temperatures

|                                  |                |                                  |               |
|----------------------------------|----------------|----------------------------------|---------------|
| Storage temperature              | -25 °C...55 °C | Ambient temperature              | -5 °C...40 °C |
| Continuous operating temp., min. | -60 °C         | Continuous operating temp., max. | 130 °C        |

## Material data

|                                |        |                           |            |
|--------------------------------|--------|---------------------------|------------|
| Material                       | Wemid  | Colour                    | dark beige |
| Colour of operational elements | orange | UL 94 flammability rating | V-0        |

## Rating data IECEx/ATEX

|                                |                    |                                 |                    |
|--------------------------------|--------------------|---------------------------------|--------------------|
| Certificate No. (ATEX)         | TUEV16ATEX7909U    | Certificate No. (IECEX)         | IECEXTUR16.0036U   |
| Max. voltage (ATEX)            | 550 V              | Current (ATEX)                  | 69 A               |
| Wire cross section max. (ATEX) | 16 mm <sup>2</sup> | Max. voltage (IECEX)            | 550 V              |
| Current (IECEX)                | 69 A               | Wire cross section max. (IECEX) | 16 mm <sup>2</sup> |

## System specifications

|                               |       |                                     |    |
|-------------------------------|-------|-------------------------------------|----|
| End cover plate required      | No    | Number of potentials                | 1  |
| Number of levels              | 1     | Number of clamping points per level | 2  |
| Number of potentials per tier | 1     | Levels cross-connected internally   | No |
| Rail                          | TS 35 |                                     |    |

## Additional technical data

|                          |         |                     |       |
|--------------------------|---------|---------------------|-------|
| Explosion-tested version | Yes     | Installation advice | Rail  |
| Open sides               | closed  | Snap-on             | No    |
| Type of fixing           | Snap-on | Type of mounting    | TS 35 |
| With snap-in pegs        | No      |                     |       |

## CSA rating data

|                               |                 |                               |       |
|-------------------------------|-----------------|-------------------------------|-------|
| Certificate No. (CSA)         | 200039-70089609 | Current size B (CSA)          | 62 A  |
| Current size C (CSA)          | 62 A            | Current size D (CSA)          | 5 A   |
| Voltage size B (CSA)          | 600 V           | Voltage size C (CSA)          | 600 V |
| Voltage size D (CSA)          | 600 V           | Wire cross section max. (CSA) | 6 AWG |
| Wire cross section min. (CSA) | 18 AWG          |                               |       |

## Conductors for clamping (additional connection)

Connection type, additional connection PUSH IN

## ALO 16

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Conductors for clamping (rated connection)

|                                                                                         |                     |                                                                                         |                     |
|-----------------------------------------------------------------------------------------|---------------------|-----------------------------------------------------------------------------------------|---------------------|
| Blade size                                                                              | 1.0 x 5.5 mm        | Clamping range, max.                                                                    | 16 mm <sup>2</sup>  |
| Clamping range, min.                                                                    | 0.5 mm <sup>2</sup> | Connection cross-section, stranded, max.                                                | 25 mm <sup>2</sup>  |
| Connection cross-section, stranded, min.                                                | 0.5 mm <sup>2</sup> | Connection direction                                                                    | top                 |
| Gauge to IEC 60947-1                                                                    | A6                  | Number of connections                                                                   | 2                   |
| Stripping length                                                                        | 18 mm               | Twin wire-end ferrules, max.                                                            | 6 mm <sup>2</sup>   |
| Twin wire-end ferrules, min.                                                            | 0.5 mm <sup>2</sup> | Type of connection                                                                      | PUSH IN             |
| Wire connection cross section AWG, max.                                                 | AWG 6               | Wire connection cross section AWG, min.                                                 | AWG 18              |
| Wire connection cross section, finely stranded, max.                                    | 25 mm <sup>2</sup>  | Wire connection cross section, finely stranded, min.                                    | 0.5 mm <sup>2</sup> |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 16 mm <sup>2</sup>  | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 1.5 mm <sup>2</sup> |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 16 mm <sup>2</sup>  | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 1.5 mm <sup>2</sup> |
| Wire connection cross-section, solid core, max.                                         | 10 mm <sup>2</sup>  | Wire connection cross-section, solid core, min.                                         | 0.5 mm <sup>2</sup> |

## General

|                                         |               |                                         |       |
|-----------------------------------------|---------------|-----------------------------------------|-------|
| Installation advice                     | Rail          | Rail                                    | TS 35 |
| Standards                               | IEC 60947-7-1 | Wire connection cross section AWG, max. | AWG 6 |
| Wire connection cross section AWG, min. | AWG 18        |                                         |       |

## Rating data

|                                              |                    |                                 |               |
|----------------------------------------------|--------------------|---------------------------------|---------------|
| Rated cross-section                          | 16 mm <sup>2</sup> | Rated voltage                   | 800 V         |
| Rated DC voltage                             | 800 V              | Rated current                   | 76 A          |
| Current at maximum wires                     | 76 A               | Standards                       | IEC 60947-7-1 |
| Volume resistance according to IEC 60947-7-x | 0.42 mΩ            | Rated impulse withstand voltage | 8 kV          |
| Power loss in accordance with IEC 60947-7-x  | 2.43 W             | Pollution severity              | 3             |
| Surge voltage category                       | III                |                                 |               |

## UL rating data

|                                            |        |                                            |       |
|--------------------------------------------|--------|--------------------------------------------|-------|
| Certificate No. (cURus)                    | E60693 | Conductor size Factory wiring max. (cURus) | 6 AWG |
| Conductor size Factory wiring min. (cURus) | 18 AWG | Conductor size Field wiring max. (cURus)   | 6 AWG |
| Conductor size Field wiring min. (cURus)   | 18 AWG | Current size B (cURus)                     | 62 A  |
| Current size C (cURus)                     | 62 A   | Current size D (cURus)                     | 5 A   |
| Voltage size B (cURus)                     | 600 V  | Voltage size C (cURus)                     | 600 V |
| Voltage size D (cURus)                     | 600 V  |                                            |       |

## ALO 16

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC000897    | ETIM 7.0    | EC000897    |
| ETIM 8.0    | EC000897    | ETIM 9.0    | EC000897    |
| ETIM 10.0   | EC000897    | ECLASS 9.0  | 27-14-11-20 |
| ECLASS 9.1  | 27-14-11-20 | ECLASS 10.0 | 27-14-11-20 |
| ECLASS 11.0 | 27-14-11-20 | ECLASS 12.0 | 27-14-11-20 |
| ECLASS 13.0 | 27-25-01-01 | ECLASS 14.0 | 27-25-01-01 |
| ECLASS 15.0 | 27-25-01-01 |             |             |

## Environmental Product Compliance

|                        |                             |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC             | No SVHC above 0.1 wt%       |

## Approvals

Approvals



Approvals MAMID

[https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319215/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319215/-T1z1mm-S800/) [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319217/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319217/-T1z1mm-S800/) [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319222/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/) [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319226/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319226/-T1z1mm-S800/) [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319230/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/) [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319231/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319231/-T1z1mm-S800/) [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319234/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319234/-T1z1mm-S800/) [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319240/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319240/-T1z1mm-S800/) [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319244/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319244/-T1z1mm-S800/) [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319213/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319213/-T1z1mm-S800/) [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319260/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319260/-T1z1mm-S800/)

|                           |            |
|---------------------------|------------|
| ROHS                      | Conform    |
| UL File Number Search     | UL Website |
| Certificate No. (cURus)   | E60693     |
| Certificate No. (cURusEX) | E184763    |

**ALO 16****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Technical data****Downloads**



|                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Approval/Certificate/Document of Conformity | <a href="#">DE PT0101 20180316 019 ISSUE01.pdf</a><br><a href="#">Attestation of Conformity</a><br><a href="#">UKCA Ex Attestation of Conformity</a><br><a href="#">IECEX Certificate</a><br><a href="#">ATEX Certificate</a><br><a href="#">DNVGL certificate</a><br><a href="#">CCC Ex Certificate</a><br><a href="#">UKCA Ex Certificate</a><br><a href="#">DNV Certificate</a><br><a href="#">UKCA declaration of conformity</a><br><a href="#">Confirmation of Standards EN 45545-2_2020-10</a> |
| Engineering Data                            | <a href="#">CAD data – STEP</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Tender specification                        | <a href="#">Klippon® Connect 2502280000 EN</a><br><a href="#">Klippon® Connect 2502280000 DE</a>                                                                                                                                                                                                                                                                                                                                                                                                     |
| User Documentation                          | <a href="#">ADDITIONAL_NOTE_DE</a><br><a href="#">ADDITIONAL_NOTE_EN</a><br><a href="#">StorageConditionsTerminalBlocks</a><br><a href="#">NTI ALO 16</a><br><a href="#">User Manual AXC 1.5-16</a>                                                                                                                                                                                                                                                                                                  |
| Catalogues                                  | <a href="#">Catalogues in PDF-format</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

## ALO 16

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Drawings

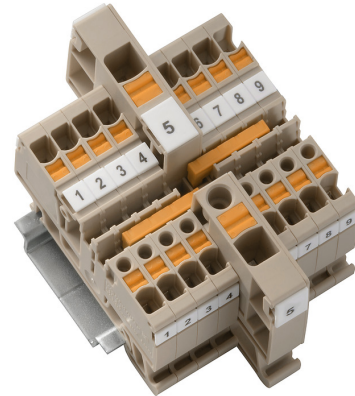

## ALO 16

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Blank




WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

| Type       | WS 12/8 PLUS MC NE WS      | Version                                                            |
|------------|----------------------------|--------------------------------------------------------------------|
| Order No.  | <a href="#">1906000000</a> | WS, Terminal marker, 12 x 8 mm, Pitch in mm (P): 8.00 Weidmueller, |
| GTIN (EAN) | 4032248528158              | white                                                              |
| Qty.       | 420 pc(s).                 |                                                                    |

2.5 mm<sup>2</sup>

The plug-in cross-connections feature easy handling and quick installation. This saves a great deal of time during installation in comparison with screwed solutions.

## General ordering data

| Type       | ZQV 2.5N/4 BL              | Version                                                              |
|------------|----------------------------|----------------------------------------------------------------------|
| Order No.  | <a href="#">1527780000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 4, |
| GTIN (EAN) | 4050118448634              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 18.1 mm                |
| Qty.       | 60 pc(s).                  |                                                                      |
| Type       | ZQV 2.5N/4 RD              | Version                                                              |
| Order No.  | <a href="#">2108700000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 4,  |
| GTIN (EAN) | 4050118448528              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 18.1 mm                |
| Qty.       | 60 pc(s).                  |                                                                      |
| Type       | ZQV 2.5N/20 RD             | Version                                                              |
| Order No.  | <a href="#">2108920000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 20, |
| GTIN (EAN) | 4050118485899              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 102 mm                 |
| Qty.       | 20 pc(s).                  |                                                                      |
| Type       | ZQV 2.5N/5 BL              | Version                                                              |
| Order No.  | <a href="#">1527790000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 5, |
| GTIN (EAN) | 4050118448627              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 23.2 mm                |
| Qty.       | 20 pc(s).                  |                                                                      |

## ALO 16

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

|            |                            |                                                                       |
|------------|----------------------------|-----------------------------------------------------------------------|
| Type       | ZQV 2.5N/50 RD             | Version                                                               |
| Order No.  | <a href="#">2109000000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 50,  |
| GTIN (EAN) | 4050118486001              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 255 mm                  |
| Qty.       | 5 pc(s).                   |                                                                       |
| Type       | ZQV 2.5N/50 BL             | Version                                                               |
| Order No.  | <a href="#">1527920000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 50, |
| GTIN (EAN) | 4050118448559              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 255 mm                  |
| Qty.       | 5 pc(s).                   |                                                                       |
| Type       | ZQV 2.5N/2                 | Version                                                               |
| Order No.  | <a href="#">1527540000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles:   |
| GTIN (EAN) | 4050118448467              | 2, Pitch in mm (P): 5.10, Insulated: Yes, Width: 7.9 mm               |
| Qty.       | 60 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/5 RD              | Version                                                               |
| Order No.  | <a href="#">2108710000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 5,   |
| GTIN (EAN) | 4050118448511              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 23.2 mm                 |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/8 RD              | Version                                                               |
| Order No.  | <a href="#">2108870000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 8,   |
| GTIN (EAN) | 4050118448481              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 38.5 mm                 |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/8                 | Version                                                               |
| Order No.  | <a href="#">1527670000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles:   |
| GTIN (EAN) | 4050118448405              | 8, Pitch in mm (P): 5.10, Insulated: Yes, Width: 38.5 mm              |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/6                 | Version                                                               |
| Order No.  | <a href="#">1527630000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles:   |
| GTIN (EAN) | 4050118448429              | 6, Pitch in mm (P): 5.10, Insulated: Yes, Width: 28.3 mm              |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/8 BL              | Version                                                               |
| Order No.  | <a href="#">1527840000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 8,  |
| GTIN (EAN) | 4050118448597              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 38.5 mm                 |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/2 RD              | Version                                                               |
| Order No.  | <a href="#">2108470000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 2,   |
| GTIN (EAN) | 4050118448542              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 7.9 mm                  |
| Qty.       | 60 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/9 BL              | Version                                                               |
| Order No.  | <a href="#">1527870000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 9,  |
| GTIN (EAN) | 4050118448580              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 43.6 mm                 |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/10 RD             | Version                                                               |
| Order No.  | <a href="#">2108910000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 10,  |
| GTIN (EAN) | 4050118486018              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 48.7 mm                 |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/10 BL             | Version                                                               |
| Order No.  | <a href="#">1527880000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 10, |
| GTIN (EAN) | 4050118448573              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 48.7 mm                 |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/3                 | Version                                                               |
| Order No.  | <a href="#">1527570000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles:   |
| GTIN (EAN) | 4050118448450              | 3, Pitch in mm (P): 5.10, Insulated: Yes, Width: 13 mm                |
| Qty.       | 60 pc(s).                  |                                                                       |

Creation date May 11, 2025 9:20:17 PM CEST

Catalogue status 26.04.2025 / We reserve the right to make technical changes.

## ALO 16

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

|            |                            |                                                                       |
|------------|----------------------------|-----------------------------------------------------------------------|
| Type       | ZQV 2.5N/3 BL              | Version                                                               |
| Order No.  | <a href="#">1527770000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 3,  |
| GTIN (EAN) | 4050118448641              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 13 mm                   |
| Qty.       | 60 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/3 RD              | Version                                                               |
| Order No.  | <a href="#">2108690000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 3,   |
| GTIN (EAN) | 4050118448535              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 13 mm                   |
| Qty.       | 60 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/7                 | Version                                                               |
| Order No.  | <a href="#">1527640000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles:   |
| GTIN (EAN) | 4050118448412              | 7, Pitch in mm (P): 5.10, Insulated: Yes, Width: 33.4 mm              |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/5                 | Version                                                               |
| Order No.  | <a href="#">1527620000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles:   |
| GTIN (EAN) | 4050118448436              | 5, Pitch in mm (P): 5.10, Insulated: Yes, Width: 23.2 mm              |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/20                | Version                                                               |
| Order No.  | <a href="#">1527720000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles:   |
| GTIN (EAN) | 4050118447972              | 20, Pitch in mm (P): 5.10, Insulated: Yes, Width: 102 mm              |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/6 RD              | Version                                                               |
| Order No.  | <a href="#">2108720000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 6,   |
| GTIN (EAN) | 4050118448504              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 28.3 mm                 |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/6 BL              | Version                                                               |
| Order No.  | <a href="#">1527820000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 6,  |
| GTIN (EAN) | 4050118448610              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 28.3 mm                 |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/7 RD              | Version                                                               |
| Order No.  | <a href="#">2108810000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 7,   |
| GTIN (EAN) | 4050118448498              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 33.4 mm                 |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/9 RD              | Version                                                               |
| Order No.  | <a href="#">2108900000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 9,   |
| GTIN (EAN) | 4050118448474              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 43.6 mm                 |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/10                | Version                                                               |
| Order No.  | <a href="#">1527690000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles:   |
| GTIN (EAN) | 4050118447989              | 10, Pitch in mm (P): 5.10, Insulated: Yes, Width: 48.7 mm             |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/50                | Version                                                               |
| Order No.  | <a href="#">1527730000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles:   |
| GTIN (EAN) | 4050118411362              | 50, Pitch in mm (P): 5.10, Insulated: Yes, Width: 255 mm              |
| Qty.       | 5 pc(s).                   |                                                                       |
| Type       | ZQV 2.5N/20 BL             | Version                                                               |
| Order No.  | <a href="#">1527890000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 20, |
| GTIN (EAN) | 4050118448566              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 102 mm                  |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 2.5N/9                 | Version                                                               |
| Order No.  | <a href="#">1527680000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles:   |
| GTIN (EAN) | 4050118447996              | 9, Pitch in mm (P): 5.10, Insulated: Yes, Width: 43.6 mm              |
| Qty.       | 20 pc(s).                  |                                                                       |

Creation date May 11, 2025 9:20:17 PM CEST

Catalogue status 26.04.2025 / We reserve the right to make technical changes.

## ALO 16

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

|            |                            |                                                                      |
|------------|----------------------------|----------------------------------------------------------------------|
| Type       | ZQV 2.5N/2 BL              | Version                                                              |
| Order No.  | <a href="#">1527740000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 2, |
| GTIN (EAN) | 4050118448658              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 7.9 mm                 |
| Qty.       | 60 pc(s).                  |                                                                      |
| Type       | ZQV 2.5N/4                 | Version                                                              |
| Order No.  | <a href="#">1527590000</a> | Cross-connector (terminal), Plugged, orange, 24 A, Number of poles:  |
| GTIN (EAN) | 4050118448443              | 4, Pitch in mm (P): 5.10, Insulated: Yes, Width: 18.1 mm             |
| Qty.       | 60 pc(s).                  |                                                                      |
| Type       | ZQV 2.5N/7 BL              | Version                                                              |
| Order No.  | <a href="#">1527830000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 7, |
| GTIN (EAN) | 4050118448603              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 33.4 mm                |
| Qty.       | 20 pc(s).                  |                                                                      |

1.5 mm<sup>2</sup>


The plug-in cross-connections feature easy handling and quick installation. This saves a great deal of time during installation in comparison with screwed solutions.

## General ordering data

|            |                            |                                                                        |
|------------|----------------------------|------------------------------------------------------------------------|
| Type       | ZQV 1.5N/4                 | Version                                                                |
| Order No.  | <a href="#">1985490000</a> | Cross-connector (terminal), Plugged, orange, 17.5 A, Number of poles:  |
| GTIN (EAN) | 4050118370201              | 4, Pitch in mm (P): 3.50, Insulated: Yes, Width: 12.5 mm               |
| Qty.       | 60 pc(s).                  |                                                                        |
| Type       | ZQV 1.5N/5                 | Version                                                                |
| Order No.  | <a href="#">1985500000</a> | Cross-connector (terminal), Plugged, orange, 17.5 A, Number of poles:  |
| GTIN (EAN) | 4050118369991              | 5, Pitch in mm (P): 3.50, Insulated: Yes, Width: 16 mm                 |
| Qty.       | 20 pc(s).                  |                                                                        |
| Type       | ZQV 1.5N/20 RD             | Version                                                                |
| Order No.  | <a href="#">1985810000</a> | Cross-connector (terminal), Plugged, red, 17.5 A, Number of poles: 20, |
| GTIN (EAN) | 4050118370355              | Pitch in mm (P): 3.50, Insulated: Yes, Width: 70 mm                    |
| Qty.       | 20 pc(s).                  |                                                                        |
| Type       | ZQV 1.5N/50 BL             | Version                                                                |
| Order No.  | <a href="#">1985720000</a> | Cross-connector (terminal), Plugged, blue, 17.5 A, Number of poles:    |
| GTIN (EAN) | 4050118370546              | 50, Pitch in mm (P): 3.50, Insulated: Yes, Width: 175 mm               |
| Qty.       | 5 pc(s).                   |                                                                        |
| Type       | ZQV 1.5N/3 RD              | Version                                                                |
| Order No.  | <a href="#">1985670000</a> | Cross-connector (terminal), Plugged, red, 17.5 A, Number of poles: 3,  |
| GTIN (EAN) | 4050118370348              | Pitch in mm (P): 3.50, Insulated: Yes, Width: 9 mm                     |
| Qty.       | 60 pc(s).                  |                                                                        |
| Type       | ZQV 1.5N/9 RD              | Version                                                                |
| Order No.  | <a href="#">1985790000</a> | Cross-connector (terminal), Plugged, red, 17.5 A, Number of poles: 9,  |
| GTIN (EAN) | 4050118370386              | Pitch in mm (P): 3.50, Insulated: Yes, Width: 30 mm                    |
| Qty.       | 20 pc(s).                  |                                                                        |

## ALO 16

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

|            |                            |                                                                        |
|------------|----------------------------|------------------------------------------------------------------------|
| Type       | ZQV 1.5N/50                | Version                                                                |
| Order No.  | <a href="#">1985620000</a> | Cross-connector (terminal), Plugged, orange, 17.5 A, Number of poles:  |
| GTIN (EAN) | 4050118370300              | 50, Pitch in mm (P): 3.50, Insulated: Yes, Width: 175 mm               |
| Qty.       | 5 pc(s).                   |                                                                        |
| Type       | ZQV 1.5N/5 BL              | Version                                                                |
| Order No.  | <a href="#">1985590000</a> | Cross-connector (terminal), Plugged, blue, 17.5 A, Number of poles: 5, |
| GTIN (EAN) | 4050118370430              | Pitch in mm (P): 3.50, Insulated: Yes, Width: 16 mm                    |
| Qty.       | 20 pc(s).                  |                                                                        |
| Type       | ZQV 1.5N/20                | Version                                                                |
| Order No.  | <a href="#">1985600000</a> | Cross-connector (terminal), Plugged, orange, 17.5 A, Number of poles:  |
| GTIN (EAN) | 4050118370225              | 20, Pitch in mm (P): 3.50, Insulated: Yes, Width: 70 mm                |
| Qty.       | 20 pc(s).                  |                                                                        |
| Type       | ZQV 1.5N/6 BL              | Version                                                                |
| Order No.  | <a href="#">1985610000</a> | Cross-connector (terminal), Plugged, blue, 17.5 A, Number of poles: 6, |
| GTIN (EAN) | 4050118370492              | Pitch in mm (P): 3.50, Insulated: Yes, Width: 19.5 mm                  |
| Qty.       | 20 pc(s).                  |                                                                        |
| Type       | ZQV 1.5N/3 BL              | Version                                                                |
| Order No.  | <a href="#">1985550000</a> | Cross-connector (terminal), Plugged, blue, 17.5 A, Number of poles: 3, |
| GTIN (EAN) | 4050118370485              | Pitch in mm (P): 3.50, Insulated: Yes, Width: 9 mm                     |
| Qty.       | 60 pc(s).                  |                                                                        |
| Type       | ZQV 1.5N/3                 | Version                                                                |
| Order No.  | <a href="#">1985480000</a> | Cross-connector (terminal), Plugged, orange, 17.5 A, Number of poles:  |
| GTIN (EAN) | 4050118370096              | 3, Pitch in mm (P): 3.50, Insulated: Yes, Width: 9 mm                  |
| Qty.       | 60 pc(s).                  |                                                                        |
| Type       | ZQV 1.5N/10                | Version                                                                |
| Order No.  | <a href="#">1985580000</a> | Cross-connector (terminal), Plugged, orange, 17.5 A, Number of poles:  |
| GTIN (EAN) | 4050118370416              | 10, Pitch in mm (P): 3.50, Insulated: Yes, Width: 33.5 mm              |
| Qty.       | 20 pc(s).                  |                                                                        |
| Type       | ZQV 1.5N/6                 | Version                                                                |
| Order No.  | <a href="#">1985510000</a> | Cross-connector (terminal), Plugged, orange, 17.5 A, Number of poles:  |
| GTIN (EAN) | 4050118370188              | 6, Pitch in mm (P): 3.50, Insulated: Yes, Width: 19.5 mm               |
| Qty.       | 20 pc(s).                  |                                                                        |
| Type       | ZQV 1.5N/50 RD             | Version                                                                |
| Order No.  | <a href="#">1985820000</a> | Cross-connector (terminal), Plugged, red, 17.5 A, Number of poles: 50, |
| GTIN (EAN) | 4050118370270              | Pitch in mm (P): 3.50, Insulated: Yes, Width: 175 mm                   |
| Qty.       | 5 pc(s).                   |                                                                        |
| Type       | ZQV 1.5N/8                 | Version                                                                |
| Order No.  | <a href="#">1985540000</a> | Cross-connector (terminal), Plugged, orange, 17.5 A, Number of poles:  |
| GTIN (EAN) | 4050118370218              | 8, Pitch in mm (P): 3.50, Insulated: Yes, Width: 26.5 mm               |
| Qty.       | 20 pc(s).                  |                                                                        |
| Type       | ZQV 1.5N/4 RD              | Version                                                                |
| Order No.  | <a href="#">1985690000</a> | Cross-connector (terminal), Plugged, red, 17.5 A, Number of poles: 4,  |
| GTIN (EAN) | 4050118370515              | Pitch in mm (P): 3.50, Insulated: Yes, Width: 12.5 mm                  |
| Qty.       | 60 pc(s).                  |                                                                        |
| Type       | ZQV 1.5N/10 BL             | Version                                                                |
| Order No.  | <a href="#">1985680000</a> | Cross-connector (terminal), Plugged, blue, 17.5 A, Number of poles:    |
| GTIN (EAN) | 4050118370539              | 10, Pitch in mm (P): 3.50, Insulated: Yes, Width: 33.5 mm              |
| Qty.       | 20 pc(s).                  |                                                                        |
| Type       | ZQV 1.5N/5 RD              | Version                                                                |
| Order No.  | <a href="#">1985710000</a> | Cross-connector (terminal), Plugged, red, 17.5 A, Number of poles: 5,  |
| GTIN (EAN) | 4050118370256              | Pitch in mm (P): 3.50, Insulated: Yes, Width: 16 mm                    |
| Qty.       | 20 pc(s).                  |                                                                        |

Creation date May 11, 2025 9:20:17 PM CEST

Catalogue status 26.04.2025 / We reserve the right to make technical changes.

11

## ALO 16

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

|            |                            |                                                                        |
|------------|----------------------------|------------------------------------------------------------------------|
| Type       | ZQV 1.5N/7 RD              | Version                                                                |
| Order No.  | <a href="#">1985750000</a> | Cross-connector (terminal), Plugged, red, 17.5 A, Number of poles: 7,  |
| GTIN (EAN) | 4050118370249              | Pitch in mm (P): 3.50, Insulated: Yes, Width: 23 mm                    |
| Qty.       | 20 pc(s).                  |                                                                        |
| Type       | ZQV 1.5N/10 RD             | Version                                                                |
| Order No.  | <a href="#">1985800000</a> | Cross-connector (terminal), Plugged, red, 17.5 A, Number of poles: 10, |
| GTIN (EAN) | 4050118370393              | Pitch in mm (P): 3.50, Insulated: Yes, Width: 33.5 mm                  |
| Qty.       | 20 pc(s).                  |                                                                        |
| Type       | ZQV 1.5N/8 BL              | Version                                                                |
| Order No.  | <a href="#">1985640000</a> | Cross-connector (terminal), Plugged, blue, 17.5 A, Number of poles: 8, |
| GTIN (EAN) | 4050118370461              | Pitch in mm (P): 3.50, Insulated: Yes, Width: 26.5 mm                  |
| Qty.       | 20 pc(s).                  |                                                                        |
| Type       | ZQV 1.5N/8 RD              | Version                                                                |
| Order No.  | <a href="#">1985770000</a> | Cross-connector (terminal), Plugged, red, 17.5 A, Number of poles: 8,  |
| GTIN (EAN) | 4050118370508              | Pitch in mm (P): 3.50, Insulated: Yes, Width: 26.5 mm                  |
| Qty.       | 20 pc(s).                  |                                                                        |
| Type       | ZQV 1.5N/9 BL              | Version                                                                |
| Order No.  | <a href="#">1985660000</a> | Cross-connector (terminal), Plugged, blue, 17.5 A, Number of poles: 9, |
| GTIN (EAN) | 4050118370478              | Pitch in mm (P): 3.50, Insulated: Yes, Width: 30 mm                    |
| Qty.       | 20 pc(s).                  |                                                                        |
| Type       | ZQV 1.5N/9                 | Version                                                                |
| Order No.  | <a href="#">1985560000</a> | Cross-connector (terminal), Plugged, orange, 17.5 A, Number of poles:  |
| GTIN (EAN) | 4050118370409              | 9, Pitch in mm (P): 3.50, Insulated: Yes, Width: 30 mm                 |
| Qty.       | 20 pc(s).                  |                                                                        |
| Type       | ZQV 1.5N/20 BL             | Version                                                                |
| Order No.  | <a href="#">1985700000</a> | Cross-connector (terminal), Plugged, blue, 17.5 A, Number of poles:    |
| GTIN (EAN) | 4050118370331              | 20, Pitch in mm (P): 3.50, Insulated: Yes, Width: 70 mm                |
| Qty.       | 20 pc(s).                  |                                                                        |
| Type       | ZQV 1.5N/6 RD              | Version                                                                |
| Order No.  | <a href="#">1985730000</a> | Cross-connector (terminal), Plugged, red, 17.5 A, Number of poles: 6,  |
| GTIN (EAN) | 4050118370454              | Pitch in mm (P): 3.50, Insulated: Yes, Width: 19.5 mm                  |
| Qty.       | 20 pc(s).                  |                                                                        |
| Type       | ZQV 1.5N/7 BL              | Version                                                                |
| Order No.  | <a href="#">1985630000</a> | Cross-connector (terminal), Plugged, blue, 17.5 A, Number of poles: 7, |
| GTIN (EAN) | 4050118370522              | Pitch in mm (P): 3.50, Insulated: Yes, Width: 23 mm                    |
| Qty.       | 20 pc(s).                  |                                                                        |
| Type       | ZQV 1.5N/2 BL              | Version                                                                |
| Order No.  | <a href="#">1985530000</a> | Cross-connector (terminal), Plugged, blue, 17.5 A, Number of poles: 2, |
| GTIN (EAN) | 4050118370423              | Pitch in mm (P): 3.50, Insulated: Yes, Width: 5.5 mm                   |
| Qty.       | 60 pc(s).                  |                                                                        |
| Type       | ZQV 1.5N/2                 | Version                                                                |
| Order No.  | <a href="#">1985410000</a> | Cross-connector (terminal), Plugged, orange, 17.5 A, Number of poles:  |
| GTIN (EAN) | 4050118369861              | 2, Pitch in mm (P): 3.50, Insulated: Yes, Width: 5.5 mm                |
| Qty.       | 60 pc(s).                  |                                                                        |
| Type       | ZQV 1.5N/4 BL              | Version                                                                |
| Order No.  | <a href="#">1985570000</a> | Cross-connector (terminal), Plugged, blue, 17.5 A, Number of poles: 4, |
| GTIN (EAN) | 4050118370317              | Pitch in mm (P): 3.50, Insulated: Yes, Width: 12.5 mm                  |
| Qty.       | 60 pc(s).                  |                                                                        |
| Type       | ZQV 1.5N/2 RD              | Version                                                                |
| Order No.  | <a href="#">1985650000</a> | Cross-connector (terminal), Plugged, red, 17.5 A, Number of poles: 2,  |
| GTIN (EAN) | 4050118370324              | Pitch in mm (P): 3.50, Insulated: Yes, Width: 5.5 mm                   |
| Qty.       | 60 pc(s).                  |                                                                        |

Creation date May 11, 2025 9:20:17 PM CEST

## ALO 16

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

|            |                            |                                                                       |
|------------|----------------------------|-----------------------------------------------------------------------|
| Type       | ZQV 1.5N/7                 | Version                                                               |
| Order No.  | <a href="#">1985520000</a> | Cross-connector (terminal), Plugged, orange, 17.5 A, Number of poles: |
| GTIN (EAN) | 4050118370195              | 7, Pitch in mm (P): 3.50, Insulated: Yes, Width: 23 mm                |
| Qty.       | 20 pc(s).                  |                                                                       |

6 mm<sup>2</sup>

The plug-in cross-connections feature easy handling and quick installation. This saves a great deal of time during installation in comparison with screwed solutions.

## General ordering data

|            |                            |                                                                      |
|------------|----------------------------|----------------------------------------------------------------------|
| Type       | ZQV 6N/3                   | Version                                                              |
| Order No.  | <a href="#">1985760000</a> | Cross-connector (terminal), Plugged, orange, 41 A, Number of poles:  |
| GTIN (EAN) | 4050118370263              | 3, Pitch in mm (P): 8.00, Insulated: Yes, Width: 21.8 mm             |
| Qty.       | 60 pc(s).                  |                                                                      |
| Type       | ZQV 6N/2                   | Version                                                              |
| Order No.  | <a href="#">1985740000</a> | Cross-connector (terminal), Plugged, orange, 41 A, Number of poles:  |
| GTIN (EAN) | 4050118370362              | 2, Pitch in mm (P): 8.00, Insulated: Yes, Width: 13.7 mm             |
| Qty.       | 60 pc(s).                  |                                                                      |
| Type       | ZQV 6N/2 BL                | Version                                                              |
| Order No.  | <a href="#">1985830000</a> | Cross-connector (terminal), Plugged, blue, 41 A, Number of poles: 2, |
| GTIN (EAN) | 4050118370232              | Pitch in mm (P): 8.00, Insulated: Yes, Width: 13.7 mm                |
| Qty.       | 60 pc(s).                  |                                                                      |
| Type       | ZQV 6N/3 BL                | Version                                                              |
| Order No.  | <a href="#">1985840000</a> | Cross-connector (terminal), Plugged, blue, 41 A, Number of poles: 3, |
| GTIN (EAN) | 4050118370379              | Pitch in mm (P): 8.00, Insulated: Yes, Width: 21.8 mm                |
| Qty.       | 60 pc(s).                  |                                                                      |
| Type       | ZQV 6N/4                   | Version                                                              |
| Order No.  | <a href="#">1985780000</a> | Cross-connector (terminal), Plugged, orange, 41 A, Number of poles:  |
| GTIN (EAN) | 4050118370287              | 4, Pitch in mm (P): 8.00, Insulated: Yes, Width: 29.9 mm             |
| Qty.       | 60 pc(s).                  |                                                                      |
| Type       | ZQV 6N/4 BL                | Version                                                              |
| Order No.  | <a href="#">1985850000</a> | Cross-connector (terminal), Plugged, blue, 41 A, Number of poles: 4, |
| GTIN (EAN) | 4050118370447              | Pitch in mm (P): 8.00, Insulated: Yes, Width: 29.9 mm                |
| Qty.       | 60 pc(s).                  |                                                                      |

## ALO 16

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Custom printing



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

| Type       | WS 12/8 PLUS MC SDR        | Version                                                            |
|------------|----------------------------|--------------------------------------------------------------------|
| Order No.  | <a href="#">1906010000</a> | WS, Terminal marker, 12 x 8 mm, Pitch in mm (P): 8.00 Weidmueller, |
| GTIN (EAN) | 4032248528165              | To customer specification                                          |
| Qty.       | 84 pc(s).                  |                                                                    |

## A-Series



Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

## General ordering data

| Type       | AEB 35 SC/1 BK             | Version               |
|------------|----------------------------|-----------------------|
| Order No.  | <a href="#">2475310000</a> | A-series, End bracket |
| GTIN (EAN) | 4050118487114              |                       |
| Qty.       | 50 pc(s).                  |                       |
| Type       | AEB 35 SCL/1 V0 BK         | Version               |
| Order No.  | <a href="#">2661300000</a> | A-series, End bracket |
| GTIN (EAN) | 4050118702187              |                       |
| Qty.       | 20 pc(s).                  |                       |
| Type       | AEB 35 SC/1                | Version               |
| Order No.  | <a href="#">1991920000</a> | A-series, End bracket |
| GTIN (EAN) | 4050118376722              |                       |
| Qty.       | 50 pc(s).                  |                       |
| Type       | AEB 35 SCL/1 V0            | Version               |
| Order No.  | <a href="#">2661280000</a> | A-series, End bracket |
| GTIN (EAN) | 4050118702163              |                       |
| Qty.       | 20 pc(s).                  |                       |

Creation date May 11, 2025 9:20:17 PM CEST

## ALO 16

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

|            |                            |                       |
|------------|----------------------------|-----------------------|
| Type       | AEB 35 SCL/1 V0 GY         | Version               |
| Order No.  | <a href="#">2661290000</a> | A-series, End bracket |
| GTIN (EAN) | 4050118702170              |                       |
| Qty.       | 20 pc(s).                  |                       |

## WS 12/8



## WS/ DEK

MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.

## Your benefits with MultiMark

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

## General ordering data

|            |                            |                                                    |
|------------|----------------------------|----------------------------------------------------|
| Type       | WS 12/8 MM WS              | Version                                            |
| Order No.  | <a href="#">2007210000</a> | WS, Terminal marker, 12 x 8 mm, Weidmueller, white |
| GTIN (EAN) | 4050118392050              |                                                    |
| Qty.       | 500 pc(s).                 |                                                    |

|            |                            |                                                      |
|------------|----------------------------|------------------------------------------------------|
| Type       | WS-A 12/8 MM WS            | Version                                              |
| Order No.  | <a href="#">2448920000</a> | WS, Terminal marker, 12 x 8.1 mm, Weidmueller, white |
| GTIN (EAN) | 4050118462975              |                                                      |
| Qty.       | 500 pc(s).                 |                                                      |

## ALO 16

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## WS 8/12



## WS/ DEK

MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.

## Your benefits with MultiMark

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

## General ordering data

|            |                            |                                                    |
|------------|----------------------------|----------------------------------------------------|
| Type       | WS-A 8/12 MM WS            | Version                                            |
| Order No.  | <a href="#">2619900000</a> | WS, Terminal marker, 8 x 12 mm, Weidmueller, white |
| GTIN (EAN) | 4050118626186              |                                                    |
| Qty.       | 300 pc(s).                 |                                                    |

## Marker holder



The marker holder offer the possibility of additional mounting of standard markers with a pitch of 5 or 5.1 mm. The angled holders can be optionally snapped together and could be mounted in all standard marking channels of the Klippon® Connect modular terminal blocks. Fitting marker types could be found under the respective accessories of the designation marking holder.

## General ordering data

|            |                            |                            |
|------------|----------------------------|----------------------------|
| Type       | BZT 1 WS 10/5              | Version                    |
| Order No.  | <a href="#">1805490000</a> | Accessories, Marker holder |
| GTIN (EAN) | 4032248270231              |                            |
| Qty.       | 100 pc(s).                 |                            |
| Type       | BZT 1 ZA WS 10/5           | Version                    |
| Order No.  | <a href="#">1805520000</a> | Accessories, Marker holder |
| GTIN (EAN) | 4032248270248              |                            |
| Qty.       | 100 pc(s).                 |                            |

## ALO 16

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Plus



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |                                                           |
|------------|----------------------------|-----------------------------------------------------------|
| Type       | DEK 5/8 PLUS MC NE WS      | Version                                                   |
| Order No.  | <a href="#">1046350000</a> | Dekafix, Terminal marker, 5 x 8 mm, Pitch in mm (P): 8.00 |
| GTIN (EAN) | 4032248782055              | Weidmueller, white                                        |
| Qty.       | 800 pc(s).                 |                                                           |

## Custom printing



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |                                                           |
|------------|----------------------------|-----------------------------------------------------------|
| Type       | DEK 5/8 PLUS MC SDR        | Version                                                   |
| Order No.  | <a href="#">1046370000</a> | Dekafix, Terminal marker, 5 x 8 mm, Pitch in mm (P): 8.00 |
| GTIN (EAN) | 4032248782079              | Weidmueller, To customer specification                    |
| Qty.       | 160 pc(s).                 |                                                           |

## ALO 16

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

|            |                            |                                                           |
|------------|----------------------------|-----------------------------------------------------------|
| Type       | DEK 5/8 MC SDR             | Version                                                   |
| Order No.  | <a href="#">1856750000</a> | Dekafix, Terminal marker, 5 x 8 mm, Pitch in mm (P): 8.00 |
| GTIN (EAN) | 4032248400867              | Weidmueller, To customer specification                    |
| Qty.       | 160 pc(s).                 |                                                           |

## Blank



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |                                                           |
|------------|----------------------------|-----------------------------------------------------------|
| Type       | DEK 5/8 MC NE WS           | Version                                                   |
| Order No.  | <a href="#">1856740000</a> | Dekafix, Terminal marker, 5 x 8 mm, Pitch in mm (P): 8.00 |
| GTIN (EAN) | 4032248400850              | Weidmueller, white                                        |
| Qty.       | 800 pc(s).                 |                                                           |

## Slotted screwdriver



Slotted screwdriver with rounded blade SD DIN 5265, ISO 2380/2, output to DIN 5264, ISO 2380/1. ChromTop tip, SoftFinish grip

## General ordering data

|            |                            |                                                                                       |
|------------|----------------------------|---------------------------------------------------------------------------------------|
| Type       | SDS 1.0X5.5X150            | Version                                                                               |
| Order No.  | <a href="#">2749380000</a> | Screwdriver, Blade width (B): 5.5 mm, Blade length: 150 mm, Blade thickness (A): 1 mm |
| GTIN (EAN) | 4050118895605              |                                                                                       |
| Qty.       | 1 pc(s).                   |                                                                                       |

## ALO 16

Weidmüller Interface GmbH &amp; Co. KG


Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

4 mm<sup>2</sup>


The plug-in cross-connections feature easy handling and quick installation. This saves a great deal of time during installation in comparison with screwed solutions.

## General ordering data

|            |                            |                                                                      |
|------------|----------------------------|----------------------------------------------------------------------|
| Type       | ZQV 4N/50 RD               | Version                                                              |
| Order No.  | <a href="#">2460730000</a> | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 50, |
| GTIN (EAN) | 4050118476156              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 303.7 mm               |
| Qty.       | 5 pc(s).                   |                                                                      |
| Type       | ZQV 4N/6 BL                | Version                                                              |
| Order No.  | <a href="#">1528170000</a> | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 6, |
| GTIN (EAN) | 4050118332926              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 34.3 mm                |
| Qty.       | 20 pc(s).                  |                                                                      |
| Type       | ZQV 4N/9                   | Version                                                              |
| Order No.  | <a href="#">1528070000</a> | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles:  |
| GTIN (EAN) | 4050118332797              | 9, Pitch in mm (P): 6.10, Insulated: Yes, Width: 52.6 mm             |
| Qty.       | 20 pc(s).                  |                                                                      |
| Type       | ZQV 4N/8                   | Version                                                              |
| Order No.  | <a href="#">1528030000</a> | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles:  |
| GTIN (EAN) | 4050118332841              | 8, Pitch in mm (P): 6.10, Insulated: Yes, Width: 46.5 mm             |
| Qty.       | 20 pc(s).                  |                                                                      |
| Type       | ZQV 4N/4 RD                | Version                                                              |
| Order No.  | <a href="#">2460800000</a> | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 4,  |
| GTIN (EAN) | 4050118476224              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 22.1 mm                |
| Qty.       | 60 pc(s).                  |                                                                      |
| Type       | ZQV 4N/8 RD                | Version                                                              |
| Order No.  | <a href="#">2460760000</a> | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 8,  |
| GTIN (EAN) | 4050118476187              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 46.5 mm                |
| Qty.       | 20 pc(s).                  |                                                                      |
| Type       | ZQV 4N/3                   | Version                                                              |
| Order No.  | <a href="#">1527940000</a> | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles:  |
| GTIN (EAN) | 4050118332865              | 3, Pitch in mm (P): 6.10, Insulated: Yes, Width: 16 mm               |
| Qty.       | 60 pc(s).                  |                                                                      |
| Type       | ZQV 4N/5                   | Version                                                              |
| Order No.  | <a href="#">1527980000</a> | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles:  |
| GTIN (EAN) | 4050118332759              | 5, Pitch in mm (P): 6.10, Insulated: Yes, Width: 28.2 mm             |
| Qty.       | 60 pc(s).                  |                                                                      |
| Type       | ZQV 4N/8 BL                | Version                                                              |
| Order No.  | <a href="#">1528190000</a> | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 8, |
| GTIN (EAN) | 4050118332858              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 46.5 mm                |
| Qty.       | 20 pc(s).                  |                                                                      |
| Type       | ZQV 4N/10 RD               | Version                                                              |
| Order No.  | <a href="#">2460740000</a> | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 10, |
| GTIN (EAN) | 4050118476163              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 58.7 mm                |
| Qty.       | 20 pc(s).                  |                                                                      |

## ALO 16

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

|            |                            |                                                                       |
|------------|----------------------------|-----------------------------------------------------------------------|
| Type       | ZQV 4N/7                   | Version                                                               |
| Order No.  | <a href="#">1528020000</a> | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles:   |
| GTIN (EAN) | 4050118332780              | 7, Pitch in mm (P): 6.10, Insulated: Yes, Width: 40.4 mm              |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 4N/50 BL               | Version                                                               |
| Order No.  | <a href="#">1528240000</a> | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 50, |
| GTIN (EAN) | 4050118333121              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 303.7 mm                |
| Qty.       | 5 pc(s).                   |                                                                       |
| Type       | ZQV 4N/2 RD                | Version                                                               |
| Order No.  | <a href="#">2460450000</a> | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 2,   |
| GTIN (EAN) | 4050118476149              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 9.9 mm                  |
| Qty.       | 60 pc(s).                  |                                                                       |
| Type       | ZQV 4N/3 RD                | Version                                                               |
| Order No.  | <a href="#">2460810000</a> | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 3,   |
| GTIN (EAN) | 4050118476231              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 16 mm                   |
| Qty.       | 60 pc(s).                  |                                                                       |
| Type       | ZQV 4N/10                  | Version                                                               |
| Order No.  | <a href="#">1528090000</a> | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles:   |
| GTIN (EAN) | 4050118332896              | 10, Pitch in mm (P): 6.10, Insulated: Yes, Width: 58.7 mm             |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 4N/2 BL                | Version                                                               |
| Order No.  | <a href="#">1528040000</a> | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 2,  |
| GTIN (EAN) | 4050118332773              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 9.9 mm                  |
| Qty.       | 60 pc(s).                  |                                                                       |
| Type       | ZQV 4N/50                  | Version                                                               |
| Order No.  | <a href="#">1528130000</a> | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles:   |
| GTIN (EAN) | 4050118332902              | 50, Pitch in mm (P): 6.10, Insulated: Yes, Width: 303.7 mm            |
| Qty.       | 5 pc(s).                   |                                                                       |
| Type       | ZQV 4N/2                   | Version                                                               |
| Order No.  | <a href="#">1527930000</a> | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles:   |
| GTIN (EAN) | 4050118332766              | 2, Pitch in mm (P): 6.10, Insulated: Yes, Width: 9.9 mm               |
| Qty.       | 60 pc(s).                  |                                                                       |
| Type       | ZQV 4N/7 RD                | Version                                                               |
| Order No.  | <a href="#">2460770000</a> | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 7,   |
| GTIN (EAN) | 4050118476194              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 40.4 mm                 |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 4N/9 BL                | Version                                                               |
| Order No.  | <a href="#">1528220000</a> | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 9,  |
| GTIN (EAN) | 4050118333107              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 52.6 mm                 |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 4N/9 RD                | Version                                                               |
| Order No.  | <a href="#">2460750000</a> | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 9,   |
| GTIN (EAN) | 4050118476170              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 52.6 mm                 |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 4N/10 BL               | Version                                                               |
| Order No.  | <a href="#">1528230000</a> | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 10, |
| GTIN (EAN) | 4050118333138              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 58.7 mm                 |
| Qty.       | 20 pc(s).                  |                                                                       |
| Type       | ZQV 4N/7 BL                | Version                                                               |
| Order No.  | <a href="#">1528180000</a> | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 7,  |
| GTIN (EAN) | 4050118333114              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 40.4 mm                 |
| Qty.       | 20 pc(s).                  |                                                                       |

Creation date May 11, 2025 9:20:17 PM CEST

Catalogue status 26.04.2025 / We reserve the right to make technical changes.

20

## ALO 16

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

|            |                            |                                                                      |
|------------|----------------------------|----------------------------------------------------------------------|
| Type       | ZQV 4N/5 BL                | Version                                                              |
| Order No.  | <a href="#">1528140000</a> | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 5, |
| GTIN (EAN) | 4050118333015              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 28.2 mm                |
| Qty.       | 60 pc(s).                  |                                                                      |
| Type       | ZQV 4N/5 RD                | Version                                                              |
| Order No.  | <a href="#">2460790000</a> | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 5,  |
| GTIN (EAN) | 4050118476217              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 28.2 mm                |
| Qty.       | 60 pc(s).                  |                                                                      |
| Type       | ZQV 4N/4                   | Version                                                              |
| Order No.  | <a href="#">1527970000</a> | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles:  |
| GTIN (EAN) | 4050118332889              | 4, Pitch in mm (P): 6.10, Insulated: Yes, Width: 22.1 mm             |
| Qty.       | 60 pc(s).                  |                                                                      |
| Type       | ZQV 4N/6                   | Version                                                              |
| Order No.  | <a href="#">1527990000</a> | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles:  |
| GTIN (EAN) | 4050118332919              | 6, Pitch in mm (P): 6.10, Insulated: Yes, Width: 34.3 mm             |
| Qty.       | 20 pc(s).                  |                                                                      |
| Type       | ZQV 4N/3 BL                | Version                                                              |
| Order No.  | <a href="#">1528080000</a> | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 3, |
| GTIN (EAN) | 4050118333008              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 16 mm                  |
| Qty.       | 60 pc(s).                  |                                                                      |
| Type       | ZQV 4N/6 RD                | Version                                                              |
| Order No.  | <a href="#">2460780000</a> | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 6,  |
| GTIN (EAN) | 4050118476200              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 34.3 mm                |
| Qty.       | 20 pc(s).                  |                                                                      |
| Type       | ZQV 4N/4 BL                | Version                                                              |
| Order No.  | <a href="#">1528120000</a> | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 4, |
| GTIN (EAN) | 4050118332872              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 22.1 mm                |
| Qty.       | 60 pc(s).                  |                                                                      |

## A-Series



Test adapters and test plugs are used for the electrical connection between terminal blocks and the test equipment. In this way, an electrical contact can be established in the wired state and measurements can be done easily.

## General ordering data

|            |                            |                                                             |
|------------|----------------------------|-------------------------------------------------------------|
| Type       | ATPG 1.5-10 L              | Version                                                     |
| Order No.  | <a href="#">1991890000</a> | Test adapter (terminal), 1.5 mm <sup>2</sup> , 250 V, 0.2 A |
| GTIN (EAN) | 4050118376647              |                                                             |
| Qty.       | 50 pc(s).                  |                                                             |

## ALO 16

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Additional accessories

**No task is too small when creating the perfect solution.**

Connections form just one part of the overall process. Small details are often the key to the perfect solution in applications where potentials are tested, grouped or even isolated.

A system is not a system without small but essential details:

- Test plugs ensure reliable pick-up from diagnostic sockets

In tandem with the manufacturing process and application.

## General ordering data

| Type       | PS 2.0 MC                  | Version                                                                | Product data | Packaging |
|------------|----------------------------|------------------------------------------------------------------------|--------------|-----------|
| Order No.  | <a href="#">0310000000</a> | PCB plug-in connector, Accessories, Test plug, red, Number of poles: 1 |              | Box       |
| GTIN (EAN) | 4008190000059              |                                                                        |              |           |
| Qty.       | 20 pc(s).                  |                                                                        |              |           |

## DEK 5/8

**WS/ DEK**

MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.

**Your benefits with MultiMark**

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

## General ordering data

| Type       | DEK 5/8 MM WS              | Version                                                |
|------------|----------------------------|--------------------------------------------------------|
| Order No.  | <a href="#">2007130000</a> | Dekafix, Terminal marker, 5 x 8 mm, Weidmueller, white |
| GTIN (EAN) | 4050118392012              |                                                        |
| Qty.       | 500 pc(s).                 |                                                        |

## ALO 16

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

|            |                            |                                                          |
|------------|----------------------------|----------------------------------------------------------|
| Type       | DEK-A 5/8 MM WS            | Version                                                  |
| Order No.  | <a href="#">2448860000</a> | Dekafix, Terminal marker, 5 x 8.1 mm, Weidmueller, white |
| GTIN (EAN) | 4050118462968              |                                                          |
| Qty.       | 500 pc(s).                 |                                                          |

## Digital multimeters



Multimeters are capable of measuring a number of variables. Each instrument can measure voltage and resistance, as well as performing continuity and diode testing as standard.

In addition, the individual multimeters also feature extra measuring options such as current, frequency, capacitance and temperature. Digital multimeters have the advantage of a clear display which can be read easily and directly. With these instruments, mistakes arising from faulty conversion of the measuring ranges or misreading the display are a thing of the past.

## General ordering data

|            |                            |            |
|------------|----------------------------|------------|
| Type       | ZUB MULTIMETER             | Version    |
| Order No.  | <a href="#">9205270000</a> | Multimeter |
| GTIN (EAN) | 4032248723522              |            |
| Qty.       | 1 pc(s).                   |            |

## A-Series



Warning covers with a flash symbol provide more safety for man and machine. They are used where external voltage must be indicated within the application.

## General ordering data

|            |                            |                                     |
|------------|----------------------------|-------------------------------------|
| Type       | AAM 16 YE FLASH            | Version                             |
| Order No.  | <a href="#">2635590000</a> | Terminal marker, 14 x 12 mm, yellow |
| GTIN (EAN) | 4050118674538              |                                     |
| Qty.       | 40 pc(s).                  |                                     |

## ALO 16

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26


D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Blank



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

| Type       | WS 10/8 PLUS MC NE WS      | Version                                                            |
|------------|----------------------------|--------------------------------------------------------------------|
| Order No.  | <a href="#">1905950000</a> | WS, Terminal marker, 10 x 8 mm, Pitch in mm (P): 8.00 Weidmueller, |
| GTIN (EAN) | 4032248528103              | white                                                              |
| Qty.       | 420 pc(s).                 |                                                                    |

## WS 8/8



## WS/ DEK

MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.

## Your benefits with MultiMark

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

## General ordering data

| Type       | WS 8/8 MM WS               | Version                                           |
|------------|----------------------------|---------------------------------------------------|
| Order No.  | <a href="#">2007170000</a> | WS, Terminal marker, 8 x 8 mm, Weidmueller, white |
| GTIN (EAN) | 4050118392043              |                                                   |
| Qty.       | 500 pc(s).                 |                                                   |

## ALO 16

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

|            |                            |                                                     |
|------------|----------------------------|-----------------------------------------------------|
| Type       | WS-A 8/8 MM WS             | Version                                             |
| Order No.  | <a href="#">2448930000</a> | WS, Terminal marker, 8 x 8.1 mm, Weidmueller, white |
| GTIN (EAN) | 4050118462982              |                                                     |
| Qty.       | 500 pc(s).                 |                                                     |

## Custom printing



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |                                                                    |
|------------|----------------------------|--------------------------------------------------------------------|
| Type       | WS 10/8 PLUS MC SDR        | Version                                                            |
| Order No.  | <a href="#">1906030000</a> | WS, Terminal marker, 10 x 8 mm, Pitch in mm (P): 8.00 Weidmueller, |
| GTIN (EAN) | 4032248528196              | To customer specification                                          |
| Qty.       | 84 pc(s).                  |                                                                    |

**ALO 16****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Accessories****Plus**

The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

**General ordering data**

|            |                            |                                                           |
|------------|----------------------------|-----------------------------------------------------------|
| Type       | DEK 5/5 PLUS MC NE WS      | Version                                                   |
| Order No.  | <a href="#">1854490000</a> | Dekafix, Terminal marker, 5 x 5 mm, Pitch in mm (P): 5.00 |
| GTIN (EAN) | 4032248393596              | Weidmueller, white                                        |
| Qty.       | 1,000 pc(s).               |                                                           |