
Terminal rails

AK 36 PE/N-S

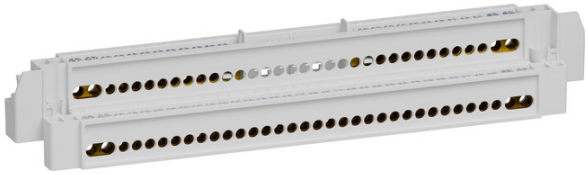

AK 36 PE/N-S

Terminal rails

Productnumber: 73485301
Dimensions: 35 x 267 x 47 mm

Terminal rail, as additional terminals or for replacement for installation in AK 24 and AK36 (since 10/2025)

PE and N screw terminal: PE terminal with 4 clamping points 6-16 mm² and 30 clamping points 1.5-6 mm², two N terminals each with 2 clamping points 6-16 mm² and 10 clamping points 1.5-6 mm²

Created at 04.06.2026. All statements without guarantee. We reserve the right to make improvements to technical progress.
Günther Spelsberg GmbH + Co. KG
Im Gewerbepark 1 · D-58579 Schalksmühle · Telefon: +49 (0) 23 55 / 892-0 · Telefax: +49 (0) 23 55 / 892-299

Technical Data

electrical characteristics

Rated operating voltage AC:	400 V
Number of poles:	3
shockproof:	No
Connection 1: Connection type:	Screws
Connection 1: Strip length:	12 mm
Connection 1: Clamping points per pole:	12
Connection 1: Suitable for Cu conductors:	1
Connection 1: Connectable conductor cross-section, fine-wire with ferrule (min):	2.5 mm²
Connection 1: Connectable conductor cross-section, fine-wire with ferrule (max):	10 mm²
Connection 1: Connectable conductor cross-section, single-wire (min):	2.5 mm²
Connection 1: Connectable conductor cross-section, single-wire (max):	16 mm²
Connection 2: Connection type:	Screws
Connection 2: Clamping points per pole:	34
Connection 2: Suitable for Cu conductors:	1
Connection 2: Connectable conductor cross-section, fine-wire with ferrule (min):	1.5 mm²
Connection 2: Connectable conductor cross-section, fine-wire with ferrule (max):	4 mm²
Connection 2: Connectable conductor cross-section, single-wire (min):	1.5 mm²
Connection 2: Connectable conductor cross-section, single-wire (max):	6 mm²

Dimensions

Width:	35 mm
Length:	267 mm
Height:	47 mm
Weight:	0.3009 kg

Material characteristics

Halogen free:	yes
Flammability class according with UL94:	V2
Glow-wire flammability:	960 °C (EN 60695-2-11)

mechanical properties

Connection 1: Tightening moment:	1.4 Nm
Connection 2: Tightening torque:	1.4 Nm

Sales Information

EAN:	4013902705238
ETIM Class:	EC001284
Custom tariff number:	85369010
Minimum order quantity:	1

Material

Insulating body material:	Thermoplastic