

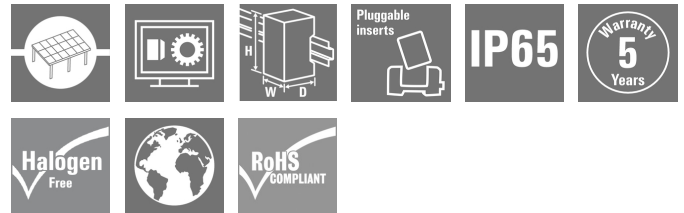
PV WC1I1RXPXG1SXM2S6WW**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Connecting photovoltaic power plants through reliable and safe industrial communications.**

To provide you with reliable information on all important weather parameters of your PV power plant Weidmüller created this portfolio of PV Weather Boxes with 2 families of products:

- Premium: Ready for immediate use, extremely robust, and protected against all-weather influences.
- Lite: The new "Lite" family offers the main functionality and protections of the "Premium" version but in a compact enclosure.

General ordering data

Version	Photovoltaics, Enclosures, Industrial Monitor, 230 V AC, Digital signals, Analog signals, RJ45, Web-based, Weather Box
Order No.	8000094711
Type	PV WC1I1RXPXG1SXM2S6WW
GTIN (EAN)	4064675857112
Qty.	1 pc(s).

PV WC1I1RXPXG1SXM2S6WW

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	300 mm	Depth (inches)	11.811 inch
Height	747 mm	Height (inches)	29.409 inch
Width	536 mm	Width (inches)	21.102 inch
Net weight	22,576.395 g		

Temperatures

Ambient temperature	-20 °C...50 °C	Operating temperature	-20°C to +50°C
---------------------	----------------	-----------------------	----------------

DC electrical properties

Earthing	Directly at the VPU	Rated voltage	230 V
Surge protection AC side	PU I 1+1 LCF 280V/12,5kA, without auxiliary contact	Surge protection WIA RS485 side (string monitoring)	yes, no auxiliary contact

DC inputs

Number of inputs	21
------------------	----

DC string monitoring

Monitoring function	Industrial Ethernet managed switch with RJ45 and SC Multi-mode ports, Remote I/O Digital Input Signals, Remote I/O Analog Input Signals, Connection between field weather sensors to SCADA through RS-485	Supply	Battery PRO ECO 72W 24V 3A
Voltage monitoring	Yes		

Housing

Protection degree	IP65	Type of mounting	Wall mounting
-------------------	------	------------------	---------------

Norms and standards

Standards	IEC 61439-2 ed 3.0, EN 61439-2:2011
-----------	-------------------------------------

Guarantee

Time interval	5 years
---------------	---------

Classifications

ETIM 6.0	EC002928	ETIM 7.0	EC002928
ETIM 8.0	EC003857	ETIM 9.0	EC003857
ETIM 10.0	EC003857	ECLASS 9.0	22-57-92-03
ECLASS 9.1	22-57-02-90	ECLASS 10.0	22-57-02-90
ECLASS 11.0	22-57-02-92	ECLASS 12.0	22-57-02-92
ECLASS 13.0	22-57-02-92	ECLASS 14.0	22-57-02-92
ECLASS 15.0	22-57-02-92		

PV WC1I1RXPXG1SXM2S6WW

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Environmental Product Compliance

RoHS Compliance Status	Compliant with exemption
RoHS Exemption (if applicable/known)	6c, 7a, 7cl
REACH SVHC	Lead 7439-92-1 6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol 119-47-1

Approvals

Approvals



Approvals MAMID	https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/
ROHS	Conform

Downloads

Approval/Certificate/Document of Conformity	Declaration of of conformity utility communication boxes
Engineering Data	Thermal Report
Technical Documentation	Mechanical Drawing
User Documentation	PV Weather Box User Manual
Catalogues	Catalogues in PDF-format

PV WC1I1RXPXG1SXM2S6WW

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

