


Description Automatic reclosing device  
Code ReStart Rd 2P  
Suitable for IDP RCCBs - 2P up to 80 A - 30 mA  
Rated voltage AC 230 V  
Rated current 25 - 40 - 63 - 80 - 100 A  
Rated current 0 A  
No. modules 1  
Standard EN 50557

|                                                                   |                    |                                                         |                       |
|-------------------------------------------------------------------|--------------------|---------------------------------------------------------|-----------------------|
| Rated frequency (Hz)                                              | 50 - 60 Hz         | Distribution system                                     | TT - TN-S             |
| Rated non-operating resistance between live parts and earth (Rdo) | 8kΩ                | Insulation voltage (Ui)                                 | 500 V                 |
| Rated operating resistance between live parts and earth (Rd)      | 16 kΩ              | Rated impulse withstand voltage (Uimp)                  | 4 kV                  |
| Maximum operating frequency                                       | 30 oper./h         | Overvoltage category                                    | III                   |
| Mechanical endurance                                              | 4000               | Dielectric strength test voltage between pole and earth | 2500 Vac for 1 minute |
| Type of residual current protection                               | AC - A - A[IR] - F | Rated residual operating current                        | 30 mA                 |
| Operating temperature                                             | -5°C ÷ +40°C       | Stocking temperature                                    | -40°C ÷ +70°C         |
| Automatic reclosure for untimely tripping                         | Yes                | Earth failure test                                      | Yes                   |
| Continuous system monitoring                                      | No                 | Number of poles                                         | 2P                    |
| Electrocod                                                        | 1414               |                                                         |                       |

## DIMENSIONAL

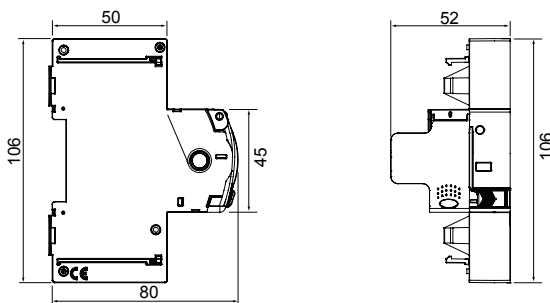

## STANDARDS/APPROVALS

