Junction box

Abox Pro 250-25²



Abox Pro 250-25²

Junction box

CUSTOMIZABLE

Productnumber: 42542001
Dimensions: 252 x 202 x 120 mm

Junction box, protection class IP66/IP67/IP69, nominal cross-section 25 mm², certified by VDE (DIN EN 60670-1/-22 (VDE 0606-1/-22)), DLG (Ammonia resistance), DNV (Class: Ships and Offshore Installations), knockouts, M20/M25/M40/M50, (4 rear, 10 side), internal fixing points, for installation in industrial environments and unprotected outdoor areas

grey, Ui=690 V AC, In=101 A, with raised screw terminal block, 5-pole - 25 mm², clampable cross-sections per pole: 12 x 10 mm², 8 x 16 mm², 4 x 25 mm² Cu rigid/flexible with wire-end ferrule

Accessories supplied:
4 double membrane seals IP66 M40 sealing range 17 - 28 mm, cover retainer

IP66 IP67 IP69 | 25² | IK09 | 690V AC | 690V DC

Created at 04.06.2026. All statements without guarantee. We reserve the right to make improvements to technical progress.
Günther Spelsberg GmbH + Co. KG
Im Gewerbepark 1 · D-58579 Schalksmühle · Telefon: +49 (0) 23 55 / 892-0 · Telefax: +49 (0) 23 55 / 892-299

Technical Data

electrical characteristics

Rated insulation voltage AC:	690 V
Rated insulation voltage DC:	690 V
Min. conductor cross section:	10 mm²
Max. conductor cross section:	25 mm²
Protection class:	II
Type of protection:	IP66/IP67/IP69
Rated current:	101 A
Terminal type:	Screw terminal
Number of poles:	5

Colours

Base unit colour:	grey
Cover colour:	grey

Dimensions

Width:	252 mm
Length:	202 mm
Height:	120 mm
Inner length:	186 mm
Inner width:	236 mm
Inner height:	99 mm
Weight:	1.3041 kg

Material characteristics

UV-resistant:	yes
Halogen free:	yes
Flammability class according with UL94:	V0
Glow-wire flammability:	960 °C (EN 60695-2-11)

mechanical properties

Impact strength:	IK09
Sealable:	yes
Cover screw torque:	1.5 Nm
Type of fastening:	Wall/ceiling mounting
Fastening:	internal fixing points

Ambient conditions

max. relative humidity 25°C:	95 %
max. relative humidity 40°C:	50 %
Min. ambient temperature:	-35 °C
Max. ambient temperature:	80 °C
24h ambient temperature:	60 °C
Installation location:	unprotected outdoor areas

Sales Information

EAN:	4013902663484
ETIM Class:	EC002600
Custom tariff number:	85369095
Minimum order quantity:	1

Material

Base unit material:	Polycarbonate, glass-fibre reinforced
Cover material:	Polycarbonate
Sealing material:	Thermoplastic elastomer
Cover screw material:	Stainless steel 1.4567 (V2A)

Certificates

Test mark:	VDE (DIN EN 60670-1/-22 (VDE 0606-1/-22))
Test mark:	DLG (Ammonia resistance)
Test mark:	DNV (Class: Ships and Offshore Installations)

Accessories

22742001 - KVR M20-MGM - Cable gland

22742101 - KVR M20-GDB/MGM - Cable gland

22742501 - KVR M25-MGM - Cable gland

22743201 - KVR M32-MGM - Cable gland

22744001 - KVR M40-MGM - Cable gland

22745001 - KVR M50-MGM - Cable gland

26042001 - DMS M20 - Double-membrane seals

26042501 - DMS M25 - Double-membrane seals

26043201 - DMS M32 - Double-membrane seals

26044001 - DMS M40 - Double-membrane seals

89512501 - Abox MPI 250 - Mounting plate

89531601 - Abox 160/250 NS35 - Standard rail

89533501 - Abox 250/350 NS35 - Standard rail

89600601 - Abox 100 KH 2006 6^2 - Terminal holder

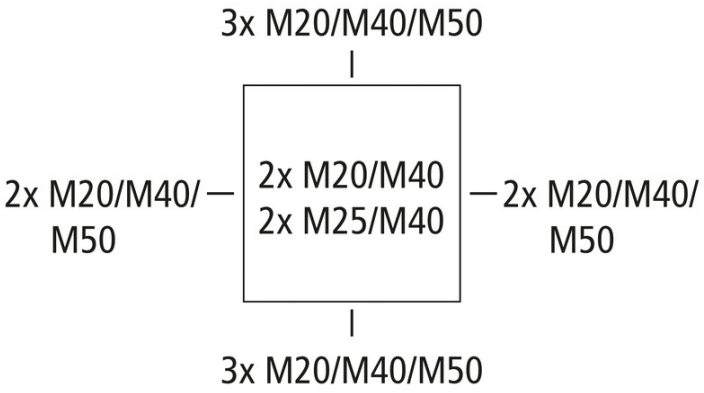
89643501 - Abox 250/350 KLS-25^2/35^2 - Terminal block

89603101 - MABF 150-2 - Mast/pipe fixing set

89604001 - MABF 215-1 - Mast/pipe fixing set

18200601 - TG DVS-42 - Cover retainer

Cable gland


3x M20/M40/M50
2x M20/M40/
M50
2x M20/M40
2x M25/M40
2x M20/M40/
M50
3x M20/M40/M50