

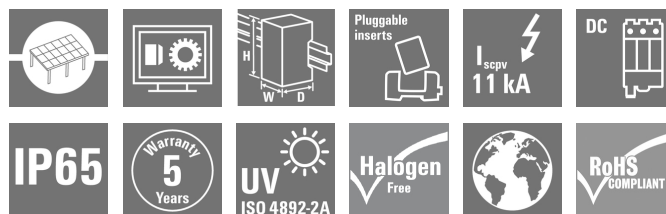
PV 216S0F0C15V003TXPX15PFWW**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Easy. fast. & save. installation**

Our mission toward the energy transition: We want to make the installation of PV systems on the roof easier, faster and safer for installers. For this reason, we offer an extensive range of PV combiner boxes. The combiner box product family PV Next offers standard variants for DC-side protection of the installation between PV panel and inverter. At the same time, PV strings can be combined in the PV boxes to reduce the amount of cabling required.

General ordering data

Version	Photovoltaics, Assembled enclosure, Combiner Box, 1500 V, With fuse holder, Surge protection II, Cable gland, Switch disconnecter, Portrait, Floating Combiner Box
Order No.	8000057082
Type	PV 216S0F0C15V003TXPX15PFWW
GTIN (EAN)	8430243418300
Qty.	1 pc(s).

PV 216S0F0C15V003TXPX15PFWW
Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com
Technical data
Dimensions and weights

Depth	360 mm	Depth (inches)	14.173 inch
Height	835 mm	Height (inches)	32.874 inch
Width	635 mm	Width (inches)	25 inch
Net weight	31,864.977 g		

Temperatures

Ambient temperature	-20 °C...50 °C	Operating temperature	-20°C to +50°C
---------------------	----------------	-----------------------	----------------

DC electrical properties

Earthing	Directly at the VPU	Rated voltage	1,500 V
Surge protection DC side	1500 V type II without remote contact	Switching capacity	400 A (DC21B 1500 V)

DC inputs

Cartridge fuse	10 x 85 mm		
Connection DC input cable (+)	Screw connection		
Connection DC input cable (-)	Screw connection		
Connection type, DC input cable	Cable gland		
DC Input + & -	Cable entry	Number of cable entries	32
		Cable diameter, min.	6 mm
		Cable diameter, max.	8 mm
Functional earth connector	Cable entry	Number of cable entries	1
		Cable diameter, min.	6 mm
		Cable diameter, max.	12 mm
	Wire connection	Type of connection	M20 Cable gland
Fuse	15 A, 16 A, 20 A, 25 A, 30 A, 32 A		
Fuse	Empty fuse holder		
Fuse type	Empty fuse holder		
Fuse-link standard	gPV (EN 60269-6)		
Fused poles of string	+/-		
Number of DC inputs	16		
Number of conduit inlets	7		
Position of the fuses	positive and negative inputs		

DC outputs

Connection type, DC output cable	Screw terminal connectors		
DC Output + & -	Wire connection	Type of connection	M40 Cable gland
		Wire cross-section, min.	150 mm ²
		Wire cross-section, max.	300 mm ²
DC output cable connection	M12 bolt and nut connection		
Load circuit breaker with auxiliary contact	No		
Number of DC outputs	2		

DC string monitoring

Monitoring function	Non monitored
---------------------	---------------

Creation date May 11, 2025 11:01:07 PM CEST

PV 216S0F0C15V003TXPX15PFWW

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Housing

Protection degree IP65

Norms and standards

Standards EN 61439-2:2011, IEC
61439-2 ed 3.0

Guarantee

Time interval 5 years

Classifications

ETIM 6.0	EC002928	ETIM 7.0	EC002928
ETIM 8.0	EC003857	ETIM 9.0	EC003857
ETIM 10.0	EC003857	ECLASS 9.0	22-57-92-03
ECLASS 9.1	22-57-02-90	ECLASS 10.0	22-57-02-90
ECLASS 11.0	22-57-02-92	ECLASS 12.0	22-57-02-92
ECLASS 13.0	22-57-02-92	ECLASS 14.0	22-57-02-92
ECLASS 15.0	22-57-02-92		

Environmental Product Compliance

RoHS Compliance Status	Compliant
REACH SVHC	Lead 7439-92-1
SCIP	1d28ada4-1634-4382-8635-45f6353a6574

Approvals

Approvals



Approvals MAMID	https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/
ROHS	Conform

Downloads

Approval/Certificate/Document of Conformity	EU Declaration of Conformity Combiner Boxes non monitored
Engineering Data	Thermal report
Technical Documentation	Electrical drawing Mechanical drawing
User Documentation	User Manual PV Floating DC Combiner Boxes
Catalogues	Catalogues in PDF-format

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

Drawings

