

HDC 48A TSLU 1PG29G**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

General ordering data

Version	HDC enclosures, Size: 9, Protection degree: IP65 (in plugged condition), Cable entry from side, Plug housing, End-locking clamp, lower side, Standard, Size of cable entries: PG 29
Order No.	1666710000
Type	HDC 48A TSLU 1PG29G
GTIN (EAN)	4008190448127
Qty.	1 pc(s).

HDC 48A TSLU 1PG29G

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Height	79 mm	Height (inches)	3.11 inch
Width	82.5 mm	Width (inches)	3.248 inch
Net weight	414 g		

Temperatures

Limit temperature	-40 °C ... 125 °C
-------------------	-------------------

Dimensions

Cable entry	w. thread	Height of housing B	78 mm
Total length housing	94 mm	Width housing C	82.5 mm

General data

EMC housings	No	Housing main material	diecast aluminium
Material of locking element		Protection degree	IP65 (in plugged condition)
Surface finish	Stainless steel, rust-proof	Tightening torque	2 Nm
	Powder coating		

Version

BG	9	Cable entry	w. thread
Clamp version	End-locking clamp	Colour (RAL)	RAL 7035
Design		Design of housing	Cable entry from side, Plug housing
	Standard		
Design of locking system	End-locking clamp, lower side	Internal thread	PG 29
Number of cable entry on top	0	Number of cable entry sideways	1
Size	9	Size of cable entries	PG 29
Suitable for ModuPlug®	No	Tightening torque	2 Nm
Top part/bottom part/lid	upper part	Type	Plug

Classifications

ETIM 6.0	EC000437	ETIM 7.0	EC000437
ETIM 8.0	EC000437	ETIM 9.0	EC000437
ETIM 10.0	EC000437	ECLASS 9.0	27-44-02-02
ECLASS 9.1	27-44-02-02	ECLASS 10.0	27-44-02-02
ECLASS 11.0	27-44-02-02	ECLASS 12.0	27-44-02-02
ECLASS 13.0	27-44-02-02	ECLASS 14.0	27-44-02-02
ECLASS 15.0	27-44-02-02		

Substance	Acetone
Chemical resistance	Conditionally resistant
Substance	Drilling oil
Chemical resistance	Resistant
Substance	Diesel
Chemical resistance	Resistant
Substance	Ethyl alcohol
Chemical resistance	Resistant

HDC 48A TSLU 1PG29G

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Substance	Transmission oil
Chemical resistance	Resistant
Substance	Hydraulic oil
Chemical resistance	Resistant
Substance	Coolant
Chemical resistance	Resistant
Substance	Petroleum benzine
Chemical resistance	Resistant
Substance	Sweat
Chemical resistance	Resistant
Substance	Premium gasoline
Chemical resistance	Conditionally resistant
Substance	Water
Chemical resistance	Resistant
Substance	UV
Chemical resistance	Unstable
Substance	Ozone
Chemical resistance	Unstable

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%
Chemical resistance	de.myview.objectmodel.impl.BlockImpl@18c4ab54 de.myview.objectmodel.impl.BlockImpl@6504cf74 de.myview.objectmodel.impl.BlockImpl@49bbd5f9 de.myview.objectmodel.impl.BlockImpl@31f458b8 de.myview.objectmodel.impl.BlockImpl@cd7dbd9 de.myview.objectmodel.impl.BlockImpl@4f6bca58 de.myview.objectmodel.impl.BlockImpl@58e8da51 de.myview.objectmodel.impl.BlockImpl@4bca786c de.myview.objectmodel.impl.BlockImpl@79716bdf de.myview.objectmodel.impl.BlockImpl@68d947a3 de.myview.objectmodel.impl.BlockImpl@76fd22bb de.myview.objectmodel.impl.BlockImpl@6eec3d10 de.myview.objectmodel.impl.BlockImpl@1cb18c81

Approvals

Approvals



Approvals MAMID	https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/
ROHS	Conform
UL File Number Search	UL Website
Certificate No. (cURus)	E92202

HDC 48A TSLU 1PG29G

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Downloads

Approval/Certificate/Document of Conformity

[Manufacturer's declaration](#)

Engineering Data

[CAD data – STEP](#)

Product Change Notification

[20220214 Technical change to HDC housings](#)

[20220214 Technische Änderung bei HDC-Gehäusen](#)

Technical Documentation

[1666710000 HDC_48A_TSLU_1PG29G_STP_Blatt_1.pdf](#)

Catalogues

[Catalogues in PDF-format](#)

Brochures

[FL FIELDWIRING EN](#)


[FL FIELDWIRING EN](#)

HDC 48A TSLU 1PG29G

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

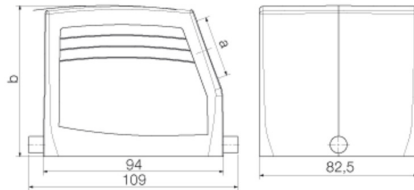

HDC 48A TSLU 1PG29G

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Bulkhead housing



The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

General ordering data

Type	HDC 48A ALU	Version
Order No.	1666740000	HDC enclosures, Size: 9, Protection degree: IP65 (in plugged condition), Bulkhead housing, End-locking clamp, lower side, Standard
GTIN (EAN)	4008190423858	
Qty.	1 pc(s).	
Type	HDC 48A ADLU	Version
Order No.	1666750000	HDC enclosures, Size: 9, Protection degree: IP65 (in plugged condition), Bulkhead housing, End-locking clamp, lower side, Standard, with cover
GTIN (EAN)	4008190423865	
Qty.	1 pc(s).	

Base housing



The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

General ordering data

Type	HDC 48A SLU 2M32G	Version
Order No.	1788570000	HDC enclosures, Size: 9, Protection degree: IP65 (in plugged condition), Base housing, End-locking clamp, lower side, Standard, Size of cable entries: M 32
GTIN (EAN)	4032248206100	
Qty.	1 pc(s).	

HDC 48A TSLU 1PG29G**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Accessories**

Type	HDC 48A SLU 1PG29G	Version
Order No.	1666770000	HDC enclosures, Size: 9, Protection degree: IP65 (in plugged
GTIN (EAN)	4008190423889	condition), Base housing, End-locking clamp, lower side, Standard,
Qty.	1 pc(s).	Size of cable entries: PG 29
Type	HDC 48A SDLU 1PG29G	Version
Order No.	1666810000	HDC enclosures, Size: 9, Protection degree: IP65 (in plugged
GTIN (EAN)	4008190423926	condition), Base housing, End-locking clamp, lower side, Standard,
Qty.	1 pc(s).	with cover, Size of cable entries: PG 29