date: 22/10/2026

# CHIP TONDO 25 GRILL

## Part number 005746

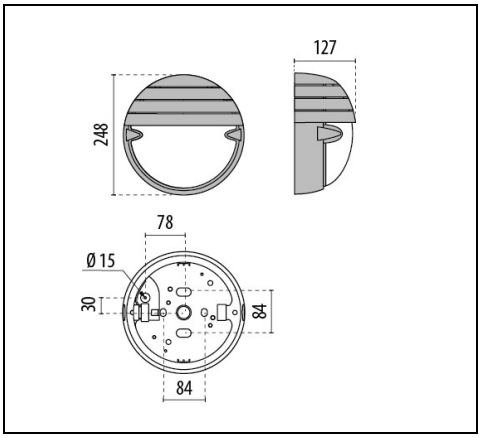


IP 55 | CLASS II

### Description

Wall, ceiling and post mounted luminaire for indoor and outdoor, comprising:

- Technopolymer housing, trim or screen
- Pressed glass diffuser, internally coated
- Class II
- Aluminium reflector for E27 versions
- Anti-ageing custom moulded silicone sealing gasket(s)
- Side entry for 20 mm conduits (drill out holes in housing arrangement)
- Anti-tampering screws available upon request
- Design by ROBERTO FIORATO
- Design by ROBERTO FIORATO

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
**PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy**
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

**info.it@pil.lighting**
www.performanceinlighting.com

## Product data

| | | | |
|---|---|---|---|
| **ETIM Group:** | EG000027 | **ETIM Class:** | EC002892 |

## General information

| | | | |
|---|---|---|---|
| **Lampholder:** | E27 | **Light source:** | Fluorescent lamps |
| **Luminaire wattage [W]:** | 1x21 W | **Colour / Finishing:** | WH-87 / White / Textured |
| **IP degree of protection:** | IP55 | **Impact resistance / impact energy:** | IK06 1J xx3 |
| **Protection class:** | II | **Optic:** | A/EW - Asymmetric Extra-Wide |
| **Net weight [kg]:** | 1.419 | **Overall diameter [mm]:** | 248 |
| **Overall width [mm]:** | 127 | | |

## Mechanical features

| | | | |
|---|---|---|---|
| **Shape:** | Round 150 ≤ x ≤ 300 mm | **Housing material:** | Plastic |
| **Diffuser material:** | Glass | **Glow wire test [°C]:** | 750 °C |

## Installation

| | | | |
|---|---|---|---|
| **Application area:** | Outdoor lighting | **Mounting type:** | Bulkhead |
| **Min. ambient temperature [°C]:** | -30 | **Max. ambient temperature [°C]:** | 45 |

## Light features

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
**PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy**
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

**info.it@pil.lighting**
www.performanceinlighting.com

## Photometric data

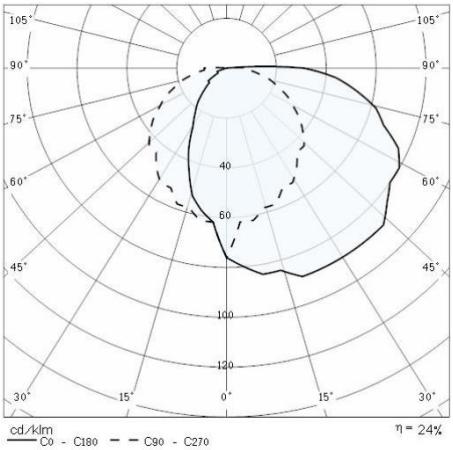


To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
**PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy**
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

**info.it@pil.lighting**
www.performanceinlighting.com