

INSERT+ ZERO GLASS

Part number 3114950

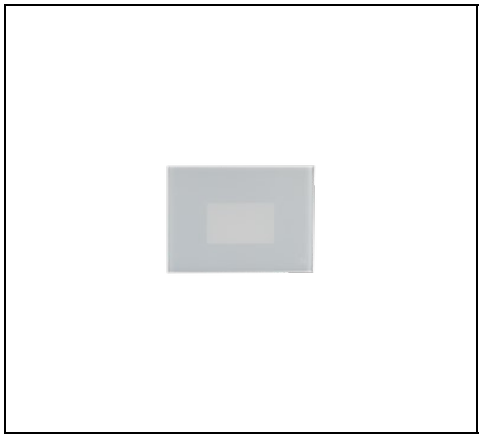

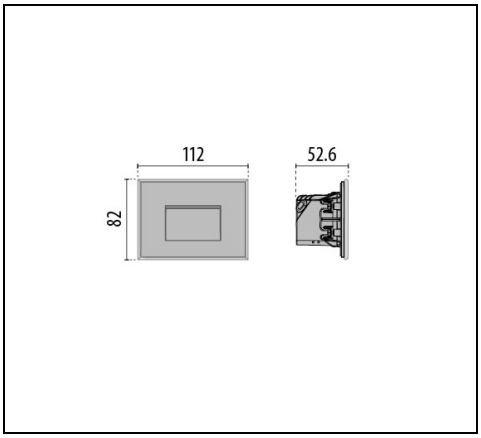

IP 65 | CLASS I

Description

Wall recessed luminaire, for indoor and outdoor, comprising:
- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Inner satin toughened flat glass diffuser
- Anti-ageing custom moulded silicone sealing gasket(s)
- Stainless steel springs for quick connection to recessed box
- Recessed box (503) included
- No visible screws
- The luminaire is suitable for through-wiring
- GLASS versions have a front diffuser in toughened and screen printed glass

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

Product data

ETIM Group:	EG000027	**ETIM Class:**	EC002892

General information

Lampholder:	LED	**Light source:**	LED
Lightsource lumen output [lm]:	511	**Luminaire lumen output [lm]:**	78
Luminaire wattage [W]:	4.5 W	**Luminous efficacy [lm/W]:**	17
CRI:	80	**Colour temperature [K]:**	3000
Colour / Finishing:	WH-87 / White / Textured	**IP degree of protection:**	IP65
Impact resistance / impact energy:	IK05 0.7J xx3	**Protection class:**	I
Optic:	S/EW - Symmetric Extra-Wide	**Net weight [kg]:**	0.393
Overall length [mm]:	112	**Overall width [mm]:**	53
Overall height [mm]:	82		

Mechanical features

Shape:	Rectangular	**Housing material:**	Aluminium
Diffuser material:	Glass		

Electrical features

Voltage type:	AC	**Input voltage [V AC]:**	100/240
Input frequency [Hz]:	50/60	**Power factor / COS Φ:**	0.6
Inrush current [A/µs]:	20 / 170	**C10 1.5 mm²:**	52
C16 2.5 mm²:	85	**B10 1.5 mm²:**	31
B16 2.5 mm²:	50		

Installation

Application area:	Outdoor lighting	**Mounting type:**	Steplight
Min. ambient temperature [°C]:	-20	**Max. ambient temperature [°C]:**	45

Light features


MacAdam:	3	**Lumen maintenance:**	L80B10@60000h
Distribution of light emission:	Direct		

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com

Photometric data

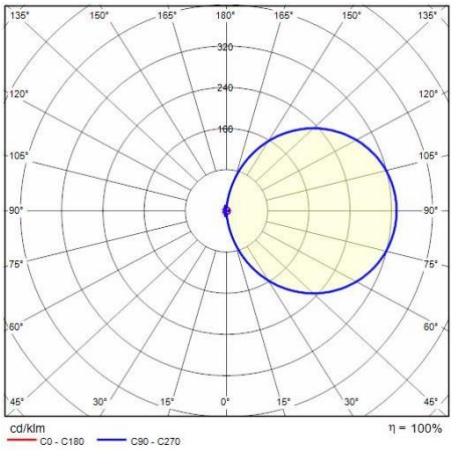

To maintain the regular updating of our products, PERFORMANCE iN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25ºC. Terms of warranty are available at https://www.performanceinlighting.com/qr/company/led-warranty

For information:
PERFORMANCE iN LIGHTING S.p.A. Headquarters - Italy
Viale del Lavoro 9/11
37030 Colognola ai Colli Verona - Italy
Tel. +39 045 61 59 211

info.it@pil.lighting
www.performanceinlighting.com