

SAIS-M23-19P-ST-3,0M**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Sensor/actuator cables are used for wiring sensors and actuators and for transmitting data or power in various applications. The moulded cable offers connected and tested connection of the plug-in connector to the cable ex-works. The cables may be exposed to a wide range of conditions, such as humidity, dust, heat, cold, shock or vibration.

The M23 cables offer: high mating frequency, high current carrying capacity and high-density contacts coupled with minimal dimensions.

Is there something you have not managed to find or you feel needs explanation? Talk to us!

General ordering data

Version	Sensor/actuator line, One end without connector, M23, Number of poles: 19, 3 m, pin, straight, Shielded: No, LED: No, Sheath material: PUR, Halogen: No
Order No.	1818160300
Type	SAIS-M23-19P-ST-3,0M
GTIN (EAN)	4032248473823
Qty.	1 pc(s).

SAIS-M23-19P-ST-3,0M

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Net weight	440 g
------------	-------

Technical specifications for cable

Bending cycles	2 Mio	Bending radius, min., moving	10 x cable diameter
Cable length	3 m	Colour coding	violet, red, grey, red / blue, green, blue, grey / pink, white / green, white / yellow, white / grey, black, Green/yellow, Yellow / brown, brown / green, white, yellow, pink, grey / brown, brown
Core in accordance with UL AWM style	10493 (80 °C / 300 V)	Halogen	No
Insulation	TPM	Irradiation crosslinked	No
Number of poles	19	Outer cladding in accordance with UL AWM style	21198 (80 °C / 300 V)
Outside diameter	9.1 mm ± 0.3 mm	Resistant to welding beads	No
Sheath material	PUR	Sheathing colour	black
Shielded	No	Suitable for cable carriers	Yes
Temperature range, moving	-25...80 °C	Temperature range, stationary	-50...80 °C
Torsion resistance	0 °/m	Welding spark resistance	No
Wire cross section (Print/Online)	3 x 0.75 mm ² + 16 x 0.34 mm ²		

General technical data

Connection side version	Connection side	1
	Connection thread	M23
	Type of contact	Pin
	Type of thread	External thread
	Outlet direction	straight
Connection side version 1	M23, Pin, External thread, straight	
Connection thread	M23	
Contact surface	Gold-plated	
Housing main material	PUR	
Insulation strength	10 ¹² Ω	
LED	No	
Plugging cycles	≥ 50	
Pollution severity	2	
Protection degree	IP67	
Rated current	8 A	
Rated voltage	120 V	
Temperature range of housing	-25...+80 °C	
Threaded ring material	Diecast zinc	
Tightening torque	M23: 2.5 Nm	
Version	pin, straight	
jumpered	No	

Electrical properties

Insulation strength	10 ¹² Ω	Rated voltage	120 V
---------------------	--------------------	---------------	-------

SAIS-M23-19P-ST-3,0M**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Technical data****General standards**

Certificate No. (cURus) E486077

Plug, left

Plug left IP67, male contact, straight, Plastic, unshielded

Plug, right

Plug right free conductor end

Classifications

ETIM 6.0	EC001855	ETIM 7.0	EC001855
ETIM 8.0	EC001855	ETIM 9.0	EC001855
ETIM 10.0	EC001855	ECLASS 9.0	27-06-03-11
ECLASS 9.1	27-06-03-11	ECLASS 10.0	27-06-03-11
ECLASS 11.0	27-06-03-11	ECLASS 12.0	27-06-03-11
ECLASS 13.0	27-06-03-11	ECLASS 14.0	27-06-03-11
ECLASS 15.0	27-06-03-11		

Environmental Product Compliance

RoHS Compliance Status Compliant
 REACH SVHC Lead 7439-92-1
 SCIP e8d8af70-4c85-4483-bc8c-9bc5b598e2a9

Approvals

Approvals



Approvals MAMID https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319260/-T1z1mm-S800/

ROHS Conform
 UL File Number Search UL Website
 Certificate No. (cURus) E486077

Downloads

Engineering Data [CAD data – STEP](#)
 Catalogues [Catalogues in PDF-format](#)
 Brochures [FL FIELDWIRING EN](#)


SAIS-M23-19P-ST-3,0M

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Dimensioned drawing




Male, straight

Wiring diagram

1	violet
2	red
3	grey
4	red/blue
5	green
6	grey/pink
7	white/green
8	white/yellow
9	white/grey
10	black
11	yellow/brown
12	brown/green
13	white
14	yellow
15	pink
16	grey/brown
17	blue
18	green/yellow
19	brown

Pole scheme

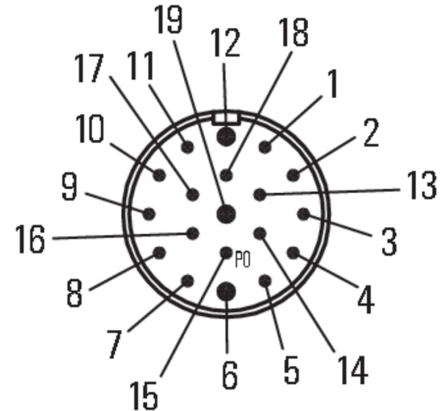

Male

The ideal tool: Screwty® with torque function



Light, securely screwed-in round plug-in connectors. Screwty set DM / VPE: 1 / Order No.: 1920000000 Adapters: M12, M12 F, M8, M8 F

SAIS-M23-19P-ST-3,0M

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Screwty for M23 moulded cables and customisable connectors



The Screwty® attachment is suitable for customisable M23 round plug-in connectors and for overmoulded M23 round plug-in connectors, with an outside dimension of the knurled nut of 26.2 ± 0.3 mm. The tightening torque is 2-2.5 Nm.

General ordering data

Type	SCREWTY M23	Version	Packaging
Order No.	1981560000	Cable gland tool adapter for M23 lines and connectors	Plastic bag
GTIN (EAN)	4032248677702		
Qty.	1 pc(s).		

Screwty® cable gland tool with torque function



The ideal tool for any application

Screwty® is the ideal, all-purpose tool for tightening all common sensor and actuator cables. Even difficult-to-reach round plugs are accessible using the Screwty®. A simple turning movement tightens and loosens the connectors without the need for excessive force. The Screwty® is a unique and global solution since it fits with most cables and plugs from other vendors (over 90 %). The Screwty® consists of a handle with a conventional 1/4" adapter. Thus it can be used for all sizes: for M12 and M8 round plug-in connectors, and for M12F and M8F customisable plugs and sockets, as well as for all M23 plugs and sockets.

General ordering data

Type	1/4" HANDGRIFF	Version
Order No.	4294820000	Bolting tool
GTIN (EAN)	4032248478279	
Qty.	1 pc(s).	