


Data sheet

LF-DI10-IP65 LON


Page 1/7

P/N
1108511319IP
EAN 4250184135708
2026/09/24
Version: M


Illustrations

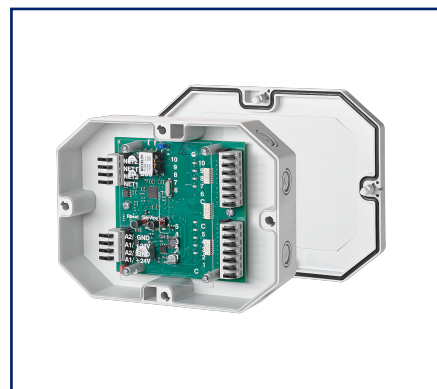

Principle diagram

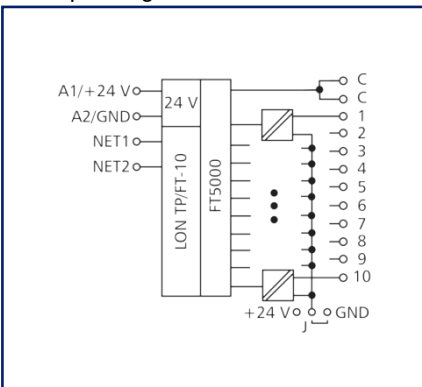

Wiring diagram

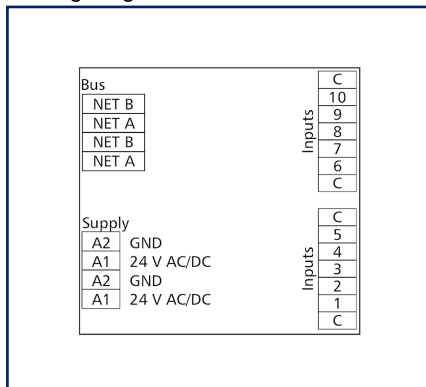

See enlarged drawings at the end of document

Product specification

The LON module in an IP65 housing with 10 digital inputs was developed for decentralized switching tasks. It is suitable for detecting potential-free switch states, for example electrical limit switches on vent valves or auxiliary contacts of power contactors. The inputs can be used as contact or voltage inputs and scanned individually or simultaneously by SNVT network variables. Suitable for decentralized mounting in serial sub-distributor.

Data sheet

LF-DI10-IP65 LON

Page 2/7

P/N
1108511319IP
EAN 4250184135708
2026/09/24
Version: M

Technical Data

RS485 interface	
Protocol	TP/FT-10, free topology
Neuron	FT5000
Data format	Standard network variables (SNVT)
Transmission parameters	
Transmission rate	78 Kbit/s
Line topology	2700 m / 64 nodes
Free topology	500 m / 64 nodes
Cabling	Twisted Pair
Supply	
Operating voltage	24 V AC/DC +/- 10 % (SELV)
Power consumption	
Power consumption AC (max.)	63 mA
Power consumption DC (max.)	21 mA
Duty cycle relative	100 %
Recovery time	550 ms
Inputs	
Digital inputs	10
Voltage input	30 V AC/DC
High signal detection	> 8 V AC/DC
Housing	
Dimensions	
Dimension (W x H x D)	160 mm x 40.7 mm x 120 mm
Dimension (W x H x D)	6.299 in. x 1.602 in. x 4.724 in.
Weight	300 g
Mounting style	directly on a flat surface, 8 knock-out openings for M12 and M16 cable glands
Mounting position	any
Connection type	Spring clamp terminal blocks
Indicator	green and yellow LED

Data sheet

LF-DI10-IP65 LON

Page 3/7

P/N
1108511319IP
EAN 4250184135708
2026/09/24
Version: M

Technical Data

Terminal blocks

Supply and bus

Terminal block	4-pole
Solid wire (AWG)	max. 1.5 mm ² / max. 16 AWG
Stranded wire (AWG)	max. 1 mm ² / max. 18 AWG
Wire diameter	min. 0.3 mm max. 1.4 mm

Module connection

Wire cross section solid	0.2 mm ² - 1.5 mm ² / AWG 28-18
Wire cross section multi	0.08 mm ² - 0.75 mm ² / AWG 28-18
Wire cross section with wire ferrule	0.08 mm ² - 0.75 mm ² / AWG 28-20
Stripping length (min.)	4 mm

Protection circuit	Polarity reversal protection for DC operating voltage Protection against interchanging power supply and bus
--------------------	--

Material

Color	gray
Material - Terminal block	Polyamid 6.6 V0
Material - Covers	Polycarbonat

Protection category according to IEC 60529

Protection category - housing (acc. to IEC 60529)	IP65
Protection category - terminal blocks (acc. to IEC 60529)	IP20

Climatic Data

Operating

Temperature - Operating °C	-5 °C - 55 °C
Temperature - Operating °F	23 °F - 131 °F
Relative humidity	max. 85 % non-condensing

Storage

Temperature - Storage °C	-20 °C - 70 °C
Temperature - Storage °F	-4 °F - 158 °F

Data sheet
LF-DI10-IP65 LON

Page 4/7

P/N
1108511319IP
EAN 4250184135708
2026/09/24
Version: M

Technical Data

Classifications

ETIM 7.0	EC000688
ETIM 8.0	EC000688
ETIM 9.0	EC000688
ETIM 10.0	EC000688

Software and additional documents

Software and documentation	Further documentation is available for free download at www.metz-connect.com
----------------------------	--

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way.

Data sheet
LF-DI10-IP65 LON

Page 5/7

P/N
1108511319IP
EAN 4250184135708
2026/09/24
Version: M

Accessories

P/N	Designation
110368	TSH 35 Hutschienenhalter für IP65
110486	HUB DC
110561	Power supply NG4 24 V DC
11087913	LF-FAM LON
ASP0250404	SP025xxHDNC ASP025


Data sheet LF-DI10-IP65 LON

Page 6/7


P/N
1108511319IP
EAN 4250184135708
2026/09/24
Version: M

Illustrations

Dimensional drawing

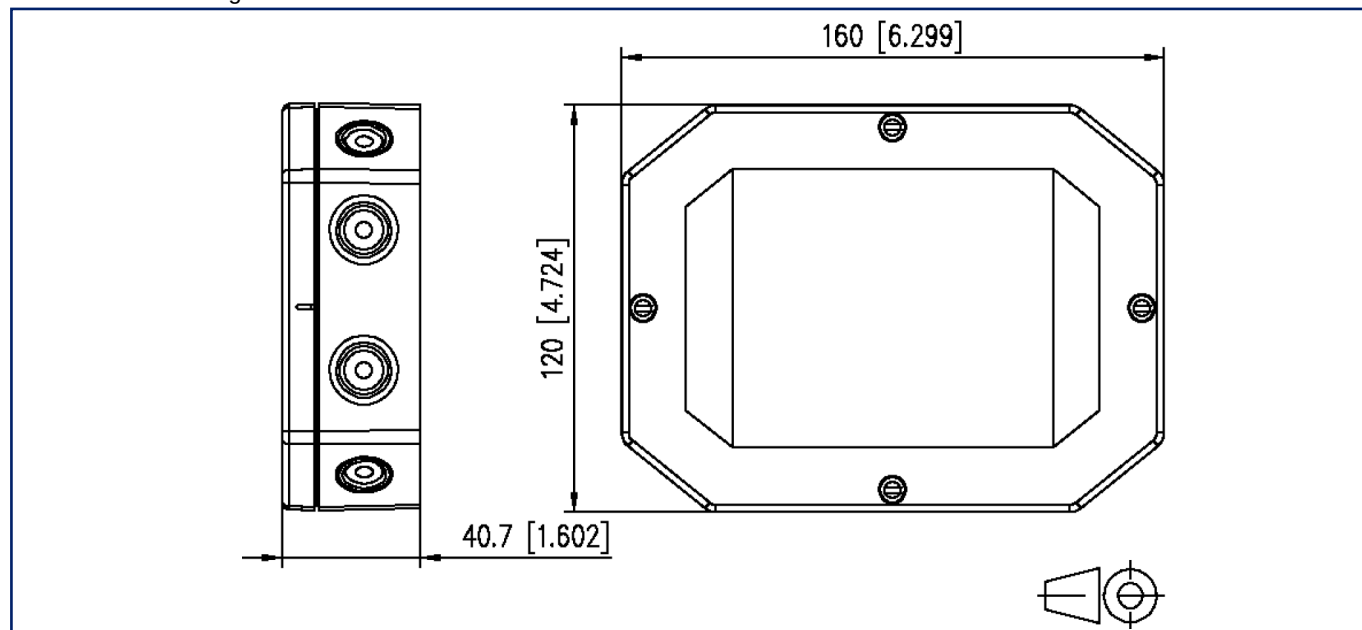

Wiring diagram

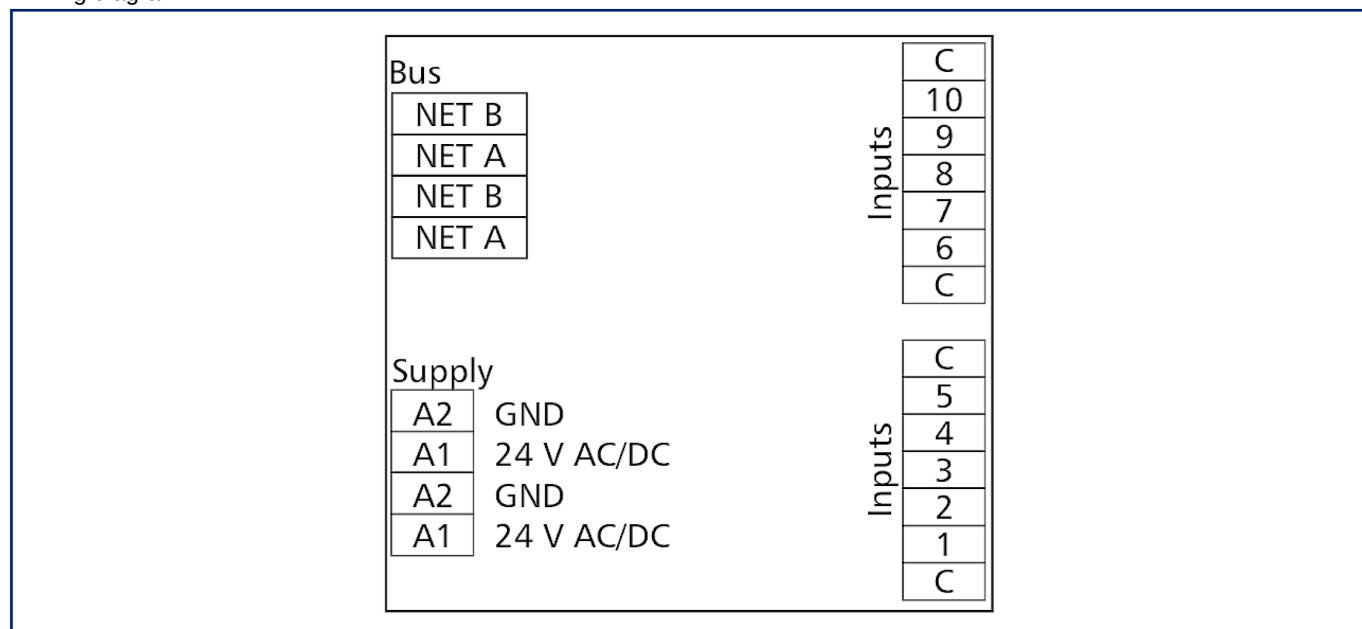

Data sheet
LF-DI10-IP65 LON

Page 7/7

P/N
1108511319IP
EAN **4250184135708**
2026/09/24
Version: M

Illustrations

Principle diagram

