

## HDC 32B SBU 1PG36G

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)



The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

### General ordering data

Version	HDC enclosures, Size: 10, Protection degree: IP65 (in plugged condition), Base housing, Side-locking clamp on lower side, Standard, Size of cable entries: PG 36
Order No.	<a href="#">1902610000</a>
Type	HDC 32B SBU 1PG36G
GTIN (EAN)	4032248585632
Qty.	1 pc(s).

## HDC 32B SBU 1PG36G

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

Depth	139.4 mm	Depth (inches)	5.488 inch
Height	79 mm	Height (inches)	3.11 inch
Width	97 mm	Width (inches)	3.819 inch
Mounting dimension - height	67 mm	Mounting dimension - width	112 mm
Net weight	631 g		

## Temperatures

Limit temperature	-40 °C ... 125 °C
-------------------	-------------------

## Dimensions

Cable entry	w. thread	Height of base B1	5 mm
Height of housing B	79 mm	Hole pitch length A2	112 mm
Total length housing	94 mm	Width base C1	92.5 mm
Width housing C	82.5 mm		

## General data

EMC housings	No	Housing main material	diecast aluminium
Material of locking element	Stainless steel, rust-proof	Protection degree	IP65 (in plugged condition)
Surface finish	Powder coating	Tightening torque	2 Nm

## Version

BG	10	Cable entry	w. thread
Clamp version	Side-locking clamp	Colour (RAL)	RAL 7035
Design	Standard	Design of housing	Base housing
Design of locking system	Side-locking clamp on lower side	Internal thread	PG 36
Number of cable entry on top	0	Number of cable entry sideways	1
Sealing	NBR	Size	10
Size of cable entries	PG 36	Suitable for ModuPlug®	Yes
Tightening torque	2 Nm	Top part/bottom part/lid	lower part
Type	Base housing		

## Classifications

ETIM 6.0	EC000437	ETIM 7.0	EC000437
ETIM 8.0	EC000437	ETIM 9.0	EC000437
ETIM 10.0	EC000437	ECLASS 9.0	27-44-02-02
ECLASS 9.1	27-44-02-02	ECLASS 10.0	27-44-02-02
ECLASS 11.0	27-44-02-02	ECLASS 12.0	27-44-02-02
ECLASS 13.0	27-44-02-02	ECLASS 14.0	27-44-02-02
ECLASS 15.0	27-44-02-02		

Substance	Acetone
Chemical resistance	Conditionally resistant
Substance	Drilling oil
Chemical resistance	Resistant
Substance	Diesel
Chemical resistance	Resistant

Creation date May 11, 2025 8:05:14 PM CEST

**HDC 32B SBU 1PG36G**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Technical data**

Substance	Ethyl alcohol
Chemical resistance	Resistant
Substance	Transmission oil
Chemical resistance	Resistant
Substance	Hydraulic oil
Chemical resistance	Resistant
Substance	Coolant
Chemical resistance	Resistant
Substance	Petroleum benzine
Chemical resistance	Resistant
Substance	Sweat
Chemical resistance	Resistant
Substance	Premium gasoline
Chemical resistance	Conditionally resistant
Substance	Water
Chemical resistance	Resistant
Substance	UV
Chemical resistance	Unstable
Substance	Ozone
Chemical resistance	Unstable

**Environmental Product Compliance**

RoHS Compliance Status	Compliant without exemption
REACH SVHC	Potassium perfluorobutane sulfonate 29420-49-3
SCIP	e98b2b24-ba23-41bf-8d19-Odda3647412f
Chemical resistance	de.myview.objectmodel.impl.BlockImpl@6619536a de.myview.objectmodel.impl.BlockImpl@19c93ddb de.myview.objectmodel.impl.BlockImpl@706d1fb7 de.myview.objectmodel.impl.BlockImpl@556a1d79 de.myview.objectmodel.impl.BlockImpl@794496bd de.myview.objectmodel.impl.BlockImpl@29334bab de.myview.objectmodel.impl.BlockImpl@31bb699d de.myview.objectmodel.impl.BlockImpl@343f2b06 de.myview.objectmodel.impl.BlockImpl@6913b242 de.myview.objectmodel.impl.BlockImpl@5a4ec2d8 de.myview.objectmodel.impl.BlockImpl@30d3bf8d de.myview.objectmodel.impl.BlockImpl@7df9c58a de.myview.objectmodel.impl.BlockImpl@98ce9d5

**Approvals**

Approvals	
Approvals MAMID	<a href="https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/">https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/</a> <a href="https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/">https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/</a>
ROHS	Conform
UL File Number Search	UL Website
Certificate No. (cURus)	E92202

**HDC 32B SBU 1PG36G****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Technical data****Downloads**

Engineering Data	<a href="#">CAD data – STEP</a>
Product Change Notification	<a href="#">20220214 Technical change to HDC housings</a> <a href="#">20220214 Technische Änderung bei HDC-Gehäusen</a>
Technical Documentation	<a href="#">1902610000 HDC 32B SBU 1PG36G STP Blatt 1.pdf</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>
Brochures	<a href="#">CAT 3 HDC 17/18 EN</a> <a href="#">FL FIELDWIRING EN</a>


**Data sheet**

**HDC 32B SBU 1PG36G**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

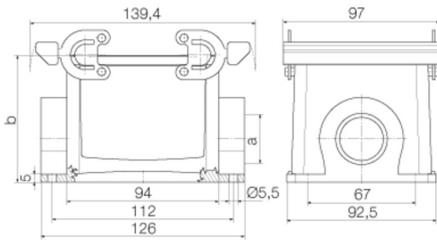

**HDC 32B SBU 1PG36G**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Accessories**

**Cover**



The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

**General ordering data**

Type	HDC 32B DODQ 4B0	Version
Order No.	<a href="#">1165790000</a>	HDC enclosures, Size: 10, Protection degree: IP65 (in plugged condition), Cover for lower part of housing, Side-locking clamp on lower side, Standard
GTIN (EAN)	4032248964512	
Qty.	1 pc(s).	

**Housing, cable entry sideways**



The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

**General ordering data**

Type	HDC 32B TSBU 1PG29G	Version
Order No.	<a href="#">1666840000</a>	HDC enclosures, Size: 10, Protection degree: IP65 (in plugged condition), Cable entry from side, Plug housing, Side-locking clamp on lower side, Standard, Size of cable entries: PG 29
GTIN (EAN)	4008190424046	
Qty.	1 pc(s).	

## HDC 32B SBU 1PG36G

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Accessories

Type	HDC 32B TSBU 1M32G	Version
Order No.	<a href="#">1788400000</a>	HDC enclosures, Size: 10, Protection degree: IP65 (in plugged condition), Cable entry from side, Plug housing, Side-locking clamp on lower side, Standard, Size of cable entries: M 32
GTIN (EAN)	4032248205936	
Qty.	1 pc(s).	

## Housing, cable entry at top



The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

## General ordering data

Type	HDC 32B TOBU 1M32G	Version
Order No.	<a href="#">1788430000</a>	HDC enclosures, Size: 10, Protection degree: IP65 (in plugged condition), Cable entry from top, Plug housing, Side-locking clamp on lower side, Standard, Size of cable entries: M 32
GTIN (EAN)	4032248205967	
Qty.	1 pc(s).	
Type	HDC 32B TOBU 1M40G	Version
Order No.	<a href="#">1221070000</a>	HDC enclosures, Size: 10, Protection degree: IP65 (in plugged condition), Plug housing, Cable entry from top, Side-locking clamp on lower side, Standard, Size of cable entries: M 40
GTIN (EAN)	4032248998180	
Qty.	1 pc(s).	
Type	HDC 32B TOBU 1PG29G	Version
Order No.	<a href="#">1666870000</a>	HDC enclosures, Size: 10, Protection degree: IP65 (in plugged condition), Cable entry from top, Plug housing, Side-locking clamp on lower side, Standard, Size of cable entries: PG 29
GTIN (EAN)	4008190424077	
Qty.	1 pc(s).	