
Busbar terminal

SKL 092

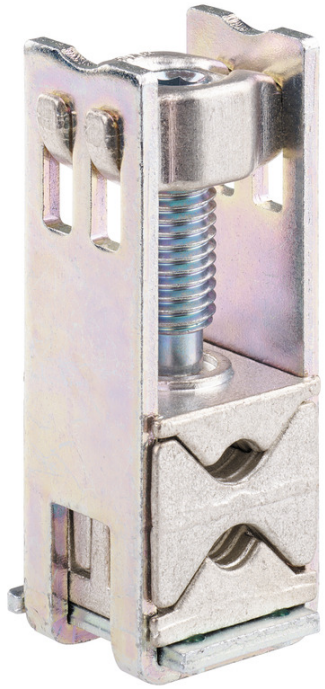

SKL 092

Busbar terminal

Productnumber: 07509201
Dimensions: 30 x 36 x 106 mm

Busbar terminal, for rails 12 x 5 mm / 12 x 10 mm, for aluminium and copper conductors

for AL/CU conductors 1x (25-50)re, 1x (25-150)rm, 1x (50-150)se, 1x (35-150)sm, 2x (25-50)re, 2x (25-70)rm, 2x (50-70)se, 2x (35-70)sm

Created at 04.06.2026. All statements without guarantee. We reserve the right to make improvements to technical progress.
Günther Spelsberg GmbH + Co. KG
Im Gewerbepark 1 · D-58579 Schalksmühle · Telefon: +49 (0) 23 55 / 892-0 · Telefax: +49 (0) 23 55 / 892-299

Technical Data

electrical characteristics

Max. conductor cross section:	185 mm²
Number of poles:	1
shockproof:	No
Connection 1: Connection type:	Screws
Connection 1: Clamping points per pole:	1
Connection 1: Suitable for Cu conductors:	1
Connection 1: Suitable for Al conductors:	1
Connection 1: Connectable conductor cross-section, single-wire (min):	25 mm²
Connection 1: Connectable conductor cross-section, single-wire (max):	185 mm²
Connection 1: Connectable conductor cross-section, stranded (min):	25 mm²
Connection 1:Connectable conductor cross-section, stranded (max):	185 mm²

Dimensions

Width:	30 mm
Length:	36 mm
Height:	106 mm
Weight:	0.3238 kg

mechanical properties

Connection 1: Tightening moment:	40 Nm

Sales Information

EAN:	4013902897360
ETIM Class:	EC000001
Custom tariff number:	85369010
Minimum order quantity:	1